


MAVIC XA Elite 29

ASTM CATEGORY 3 : offroad with jumps less than 61cm
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included
 Recommended tyre sizes: 35 mm to 69 mm (1.4" to 2.7")
 Recommended tyre sizes: 46 to 64 mm (1.8" to 2.5")

参照ホイール

R97181	XaEl29RrBlk	R97411	XaEl29RrBstXDBlk
R97182	XaEl29RrGrn	R97412	XaEl29RrBstXDGrn
R97183	XaEl29RrBlu	R97413	XaEl29RrBstXDBlu
R97401	XaEl29RrBstBlk	R97531	XaEl29RrXDBlk
R97402	XaEl29RrBstGrn	R97532	XaEl29RrXDGrn
R97403	XaEl29RrBstBlu	R97533	XaEl29RrXDBlu

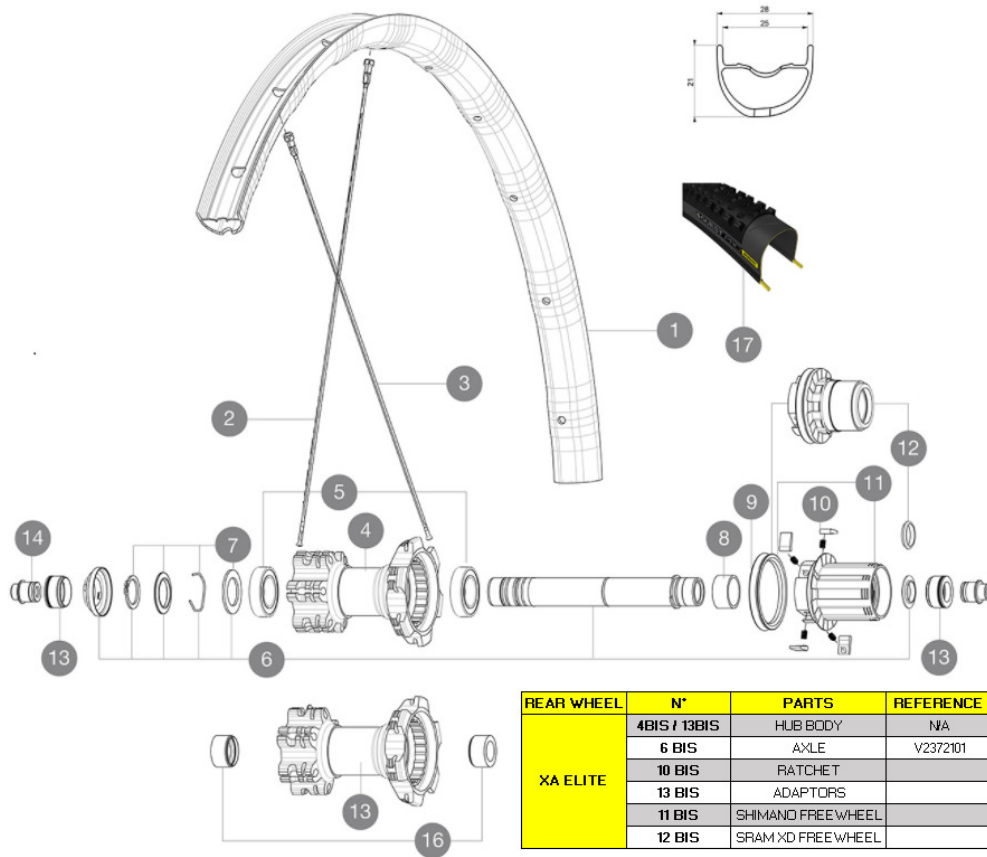

REAR WHEEL	N°	PARTS	REFERENCE	REFERENCE BOOST
XA ELITE	4BIS / 13BIS	HUB BODY	NA	NA
	6 BIS	AXLE	V2372101	V2372201
	10 BIS	RATCHET		V2375201
	13 BIS	ADAPTORS		V2510701
	11 BIS	SHIMANO FREEWHEEL		V3780101
	12 BIS	SRAM XD FREEWHEEL		V3740101

RIMS



ÄÖÛÄ«ÄÖÛÇ©'Á%ÖÏ¼MMÏ¼ÖÏ¼6,5 :

1	V2990115	KIT FRONT/REAR RIM XA ELITE 29" 25mm BLACK TUBELESS
1	V3030115	KIT FRONT/REAR RIM XA ELITE 29" 25mm BLUE TUBELESS
1	V3010115	KIT FRONT/REAR RIM XA ELITE 29" 25mm GREEN TUBELESS
	V2700101	BOOST Tube 28mm for 25 to 27mm wide rims

SPOKES

2	V2382301	12 REAR DRIVE SIDE SPOKES 297mm CROSSRIDE
3	36689601	"12 SPOKES DRIVE SIDE CROSSROC 29"" 293mm"

HUB SHELLS

4	N/A	HUB BODY
4	N/A	HUB BODY
4	N/A	HUB BODY
	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	V2371201	KIT REAR QRM AXLE 135-142 / BOOST 148mm
	V2372101	KIT ID360 135/142 D6T AXLE WITH CLIP
	V2372201	KIT ID360 148 D6T AXLE WITH CLIP
7	V2370401	REAR AUTO ADJUST.PLAY KIT 12MM AXLE
8	35124501	SET OF 3 REAR AXLE/FREEWHEEL BODY SPACERS
9	99610701	ITS4 SEAL

10	99610601	ITS4 PAWLS KIT
	V2375201	KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific)
11	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (WITHOUT PAWLS)
	V3780101	HG9 Alloy MTB Freewheel Body ID360
12	35684101	ITS-4 FREEWHEEL BODY XD +SEAL 2013 (WITHOUT PAWLS)
	V3740101	XD MTB Freewheel Body ID360
15	N/A	HUB BODY
15	N/A	HUB BODY
15	N/A	HUB BODY
	N/A	HUB BODY

TYRES

17	39243433	Quest Pro 29x2.35
----	----------	-------------------




ADAPTERS

13	32965001	ADAPTER Rr 12x142mm Elite/CRide MTB (Rd)
	V2510701	ID360 EVO REAR AXLE ADAPTORS 12x142mm DCL & D6T
14	30873101	2 REAR REDUCERS 12/9,5mm 2012 ITS4 HUB
16	V2371401	YELLOW AXLE SUPPORT REAR BOOST 148mm FOR SELF ADJUSTING AXLE

MAVIC

XA Elite 29

付属品

1 bottle of Mavic Sealant (355 466 01) 1	
BR101 quick releases (M40350 frt, M40351 rear road, M40352 rear MTB) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear QR adapters for ITS4 and TS2 (308 731 01) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Tubeless rim tape	
Tubeless rim tape	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: convertible from Quick Release to 12mm thru axle with included adapters	
Rear axle: convertible from Quick Release to 12mm thru axle with included adapters	

Specifications

リム

- Material : Mxstal
 - Material : Mxstal
 - Joint : SUP
 - Joint : SUP
 - Drilling : traditional
 - Drilling : traditional
 - Weight reduction : ISM 4D
 - Weight reduction : ISM 4D
 - Valve hole diameter : 6.5 mm
 - Valve hole diameter : 6.5 mm
 - Tyre : UST Tubeless and tubetype
 - Tyre : UST Tubeless and tubetype
 - Internal width : 25 mm
 - Internal width : 25 mm
 - ETRTO size 27.5" : 584x25ss
 - ETRTO size 27.5" : 584x25ss
 - ETRTO size 29" : 622x25ss
 - ETRTO size 29" : 622x25ss
- Hookless profile
Hookless profile
Use with Mavic Tubeless Tape
Use with Mavic Tubeless Tape

スポーク

- Material : steel
- Material : steel
- Shape : straight pull, bladed, double butted
- Shape : straight pull, bladed, double butted
- Count : 24 front and rear
- Count : 24 front and rear
- Lacing : front and rear crossed 2
- Lacing : front and rear crossed 2

ホイールハブ

- Front and rear bodies : aluminum
- Front and rear bodies : aluminum
- Axle material : aluminum
- Axle material : aluminum
- Sealed cartridge bearings
- Sealed cartridge bearings
- Freewheel : ITS-4 alloy
- Freewheel : ITS-4 alloy

VERSIONS

- Color : Black or Black/Blue or Black/Green
 - Color : Black or Black/Blue or Black/Green
 - Disc standard : 6 Bolts only
 - Disc standard : 6 Bolts only
 - Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
 - Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Lefty Supermax
Lefty Supermax

ホイールの重み

- ホイール重量 (クイックリリースおよびクリンチャーチューブラーを除く) (g) :
- Weight Rear 27.5": 915
Weight Rear 29": 955