


ASTM CATEGORY 5 : extreme offroad
Recommended tyre sizes: 50 to 76 mm (2.0" to 3.0")

参照ホイール

P84751	DmxDH27,518Pr	R17431	DmxDH1827,5Rr
R22731	Dmx DH 18 27,5 Rr XD		

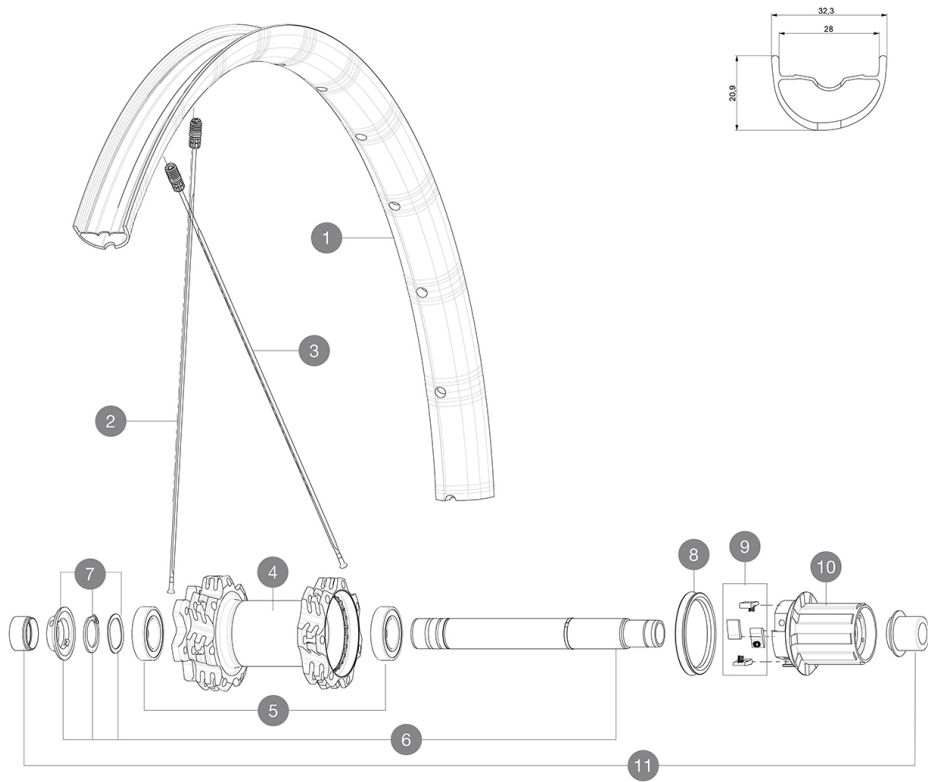

RIMS



&NBSP;:

1	V2318913	KIT REAR RIM DEEMAX DH 27,5"
---	----------	------------------------------

SPOKES

2	V2386001	KIT 14 REAR NON DRIVE SIDE FLAT SPOKES 288mm
3	V2385901	KIT 14 REAR DRIVE SIDE FLAT SPOKES 286mm

HUB SHELLS

4	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	V2371501	KIT AXLE 150/157mm ITS4 QRM AUTO
7	V2373001	KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing
8	99610701	ITS4 SEAL
9	99610601	ITS4 PAWLS KIT
10	V3610101	HG MTB FREEWHEEL BODY ITS4 QRM AUTO

ADAPTERS

11	V2510701	ID360 EVO REAR AXLE ADAPTERS 12x142mm DCL & D6T
	V2510801	ID360 EVO REAR AXLE ADAPTERS 9x135mm DCL & D6T



Deemax DH

付属品

UST (129 838 01)	
UST (129 838 01)	
 (325 423 01)	
 (325 423 01)	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Freewheel: Shimano/Sram or XD	
20mm 15mm	
20mm 15mm	
Rear axle : 12x157mm, convertible to 12x150 with optional adapters	
Rear axle : 12x157mm, convertible to 12x150 with optional adapters	

Specifications

リム

- :
• :
• SUP
• SUP
ISM 4D
6.5 mm
6.5 mm
UST
UST
UST
28 mm
28 mm
:
:
• ETRTO 27.5" : 584x28TSS
• ETRTO 27.5" : 584x28TSS

スポーク

- Shape : straight pull, flat rear and flat, double butted front
• Shape : straight pull, flat rear and flat, double butted front
28
28
3
3

ホイールハブ

- Freewheel : ITS-4 QRM Auto alloy
• Freewheel : ITS-4 QRM Auto alloy

VERSIONS

- 6
6
/

ホイールの重み

1160