


## REFERENCES WHEELS



### RIMS

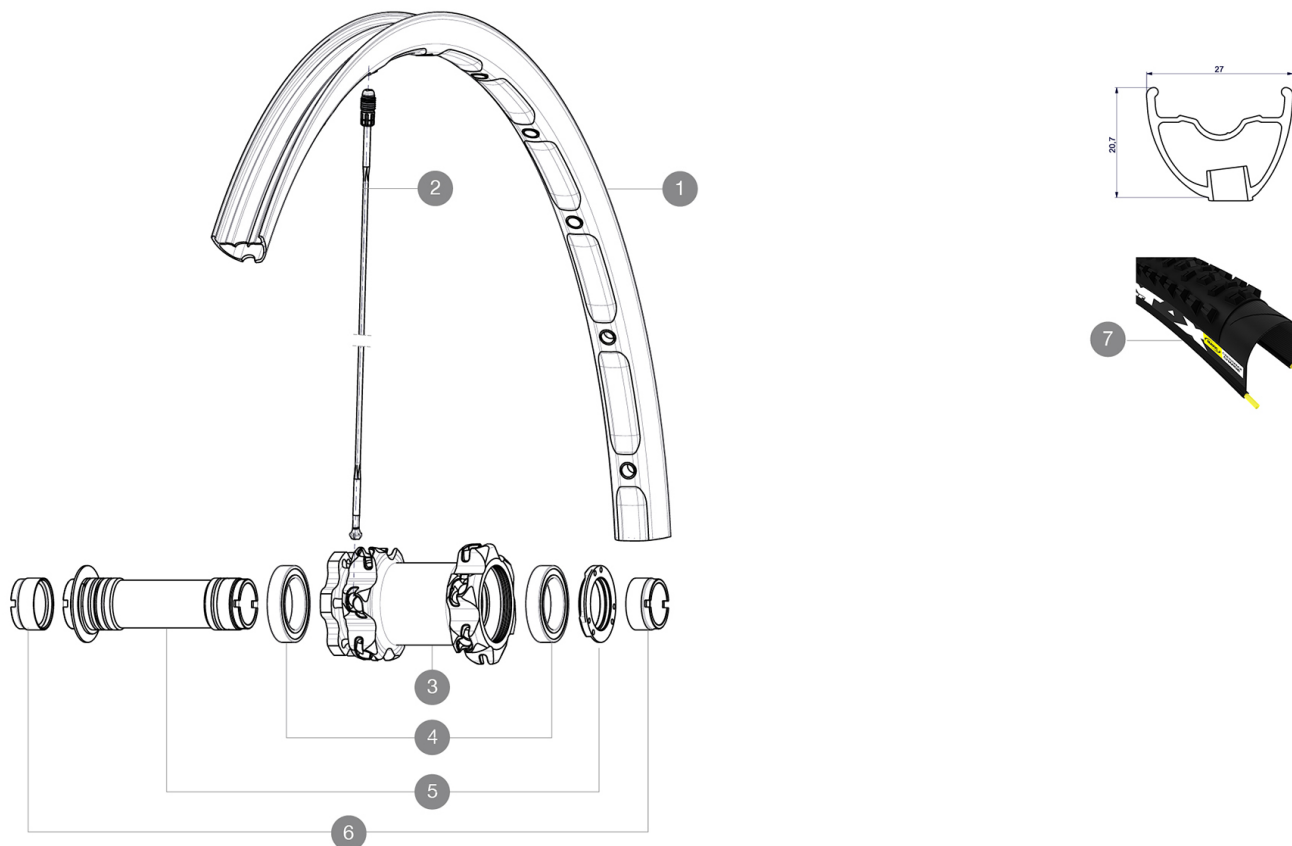

&amp;NBSP;:

|   |          |                                        |
|---|----------|----------------------------------------|
| 1 | 36692310 | "KIT FRONT CROSSMAX ENDURO 27,5"" RIM" |
|---|----------|----------------------------------------|

### SPOKES

|   |          |                                                          |
|---|----------|----------------------------------------------------------|
| 2 | 36674901 | KIT 12 FT XMAX END/FT-NDS DEEMAX PRO 27,5" ALU SPK 275mm |
|---|----------|----------------------------------------------------------|

### HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 3 | N/A      | HUB BODY                                    |
| 4 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 5 | 30870501 | FRONT AXLE 20mm CROSSMAX + DEEMAX ULTI 2012 |

### TYRES

|   |          |                      |
|---|----------|----------------------|
| 7 | 35636424 | Crossmax Charge 650b |
|---|----------|----------------------|

### ADAPTERS

|   |          |                     |
|---|----------|---------------------|
| 6 | 12982901 | ADAPTER Ft 20x110mm |
|---|----------|---------------------|

MAVIC

Crossmax Enduro 27.5 WTS

DELIVERED WITH

|                                 |  |
|---------------------------------|--|
| BX601 rear quick release        |  |
| UST valve and accessories       |  |
| Front 15 mm adapters            |  |
| Front 20 mm adapters            |  |
| Rear QR adapters                |  |
| Rear 12x142mm adapters          |  |
| Specific disc bolts             |  |
| Multifonction adjustment wrench |  |
| User guide                      |  |

Specifications

RIMS

- **Material** : Maxtal
  - **Joint** : SUP
  - **Drilling** : Fore
- Disc brake specific profile
- **Weight reduction** : ISM
  - **Valve hole diameter** : 6.5 mm
  - **Tyre** : UST Tubeless and tubetype
  - **Internal width** : 21 mm front and 19mm rear
  - **ETRTO size 26"** : 559x21C front & 559x19C rear
  - **ETRTO size 650b/27.5"** : 584x21C front & 584x19C rear
  - **Recommended tyre sizes** : 2.0 to 2.5

SPOKES

- **Material** : Zicral
- **Shape** : straight pull, bladed
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and 20 rear
- **Lacing** : front crossed 2, rear Isopulse

WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : ITS-4 alloy
- Shimano 11 speeds compatible  
XD Compatible (XX1-X01) with optionnal kit

WHEEL WEIGHTS

Weight Front 26": 825  
Weight Front 27.5": 850