MAVIC Crossmax Light

ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included
Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

REFERENCES WHEELS

F80261	Xmx Light 27,5 Ft	F80271	Xmx Light 27,5 Ft Bst

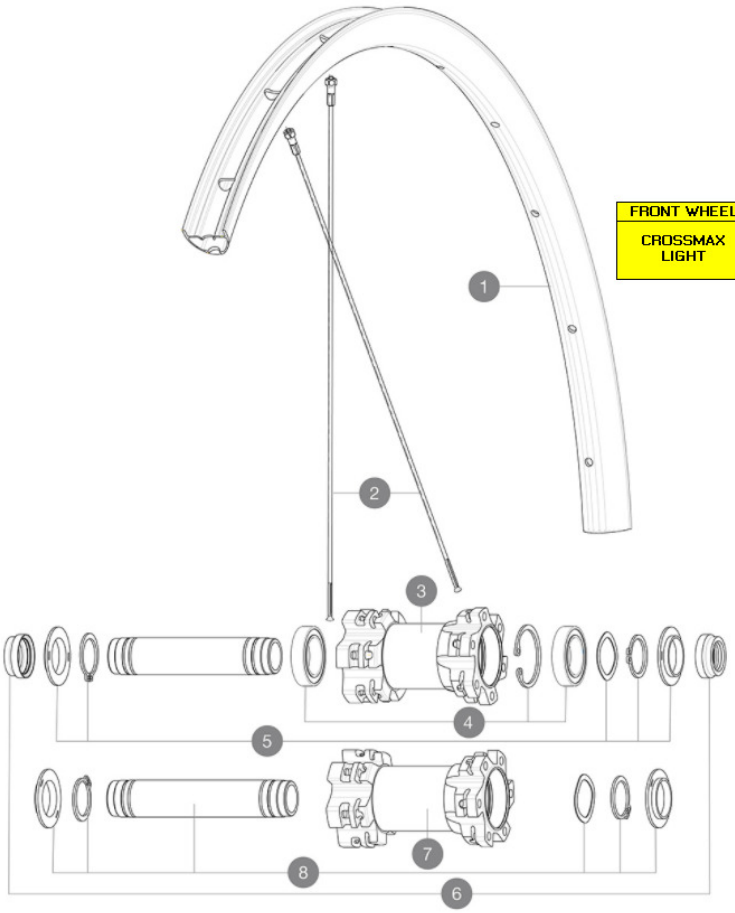



FRONT WHEEL	N°	PARTS	REFERENCE	REFERENCE BOOST
CROSSMAX LIGHT	3BIS / 7BIS	HUB BODY	N/A	N/A
	5BIS / 8BIS	AXLE	V2372301	V2372401
	6 BIS	ADAPTORS	V2372501	

RIMS

 :

1	V2318015	KIT FRONT/REAR RIM CROSSMAX LIGHT 27,5'' 22TSS
	V2620101	UST RIM TAPE 25mm (for 21-24mm wide rim)

SPOKES

2	V2385301	KIT 12 FT/NDS CROSSMAX LIGHT 27,5'' SPK 278mm

HUB SHELLS

3	N/A	HUB BODY
	N/A	HUB BODY
4	99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804
5	V2371901	KIT FRONT AXLE MTB L1 QRM AUTO 15x100mm
	V2372301	KIT 100mm AXLE QRM AUTO MTB > 2019
7	N/A	HUB BODY
	N/A	HUB BODY
8	V2372001	KIT FRONT AXLE MTB L1 QRM AUTO BOOST 15x110mm
	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019

ADAPTERS

6	V2390801	KIT 2 FORK RESTS FRONT AXLE MTB QRM AUTO
	V2372501	15mm MTB Axle Cap QRM Auto From 2019

Download date: 2024-07-16 / Update date: 2022-03-01

MAVIC Crossmax Light

2018
FRONT

DELIVERED WITH

UST valve and accessories (129 838 01)	
Tubeless rim tape	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Front axle: convertible from 15mm thru axle to Quick Release with optional adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

Specifications

RIMS

- **Material :** S6000 Aluminum
- **Joint :** SUP
- **Drilling :** traditional
- **Valve hole diameter :** 6.5 mm
- **Tyre :** UST Tubeless and tubetype
- **Internal width :** 22 mm
- **ETRTO size 27.5" :** 584x22TSS
- **ETRTO size 29" :** 622x22TSS

Hookless profile
Use with Mavic Tubeless Tape

SPOKES

- **Material :** steel
- **Shape :** straight pull, round, double butted
- **Count :** 24 front and rear
- **Lacing :** front and rear crossed 2

WHEEL HUB

- **Front and rear bodies :** aluminum
- **Axle material :** aluminum
- **Front bearings :** auto adjust sealed cartridge bearings (QRM Auto), Rear bearings sealed cartridge bearings (QRM)
- **Freewheel :** TS-2 alloy

VERSIONS

- **Color :** Black only
- **Disc standard :** 6 Bolts only
- **Hub width :** Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

WHEEL WEIGHTS

Weight Front 27.5": 785
Weight Front 29": 825

Download date: 2024-07-16 / Update date: 2022-03-01