

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")

## REFERENCES WHEELS

F87651 Deemax DH 27,5 Ft

F87661 Deemax DH 27,5 Ft Boost

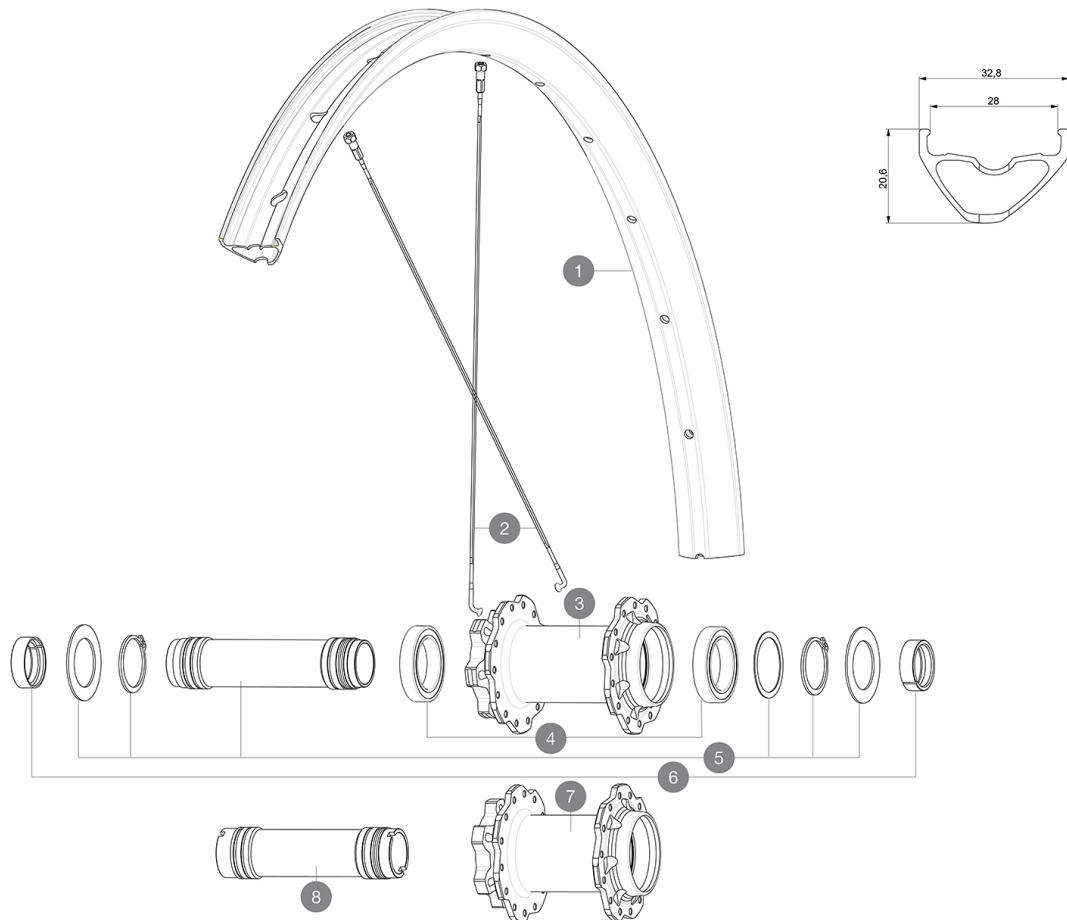

## RIMS



&NBSP;:

|   |          |                                            |
|---|----------|--------------------------------------------|
| 1 | V3764315 | KIT FRONT/REAR RIM DEEMAX DH 20 27,5"      |
|   | V2640101 | UST RIM TAPE 32mm for 28 to 29mm wide rims |

## SPOKES

|   |          |                                                             |
|---|----------|-------------------------------------------------------------|
| 2 | V2388001 | KIT 14 J BENT STEEL SPOKES 281mm DEEMAX DH 27,5" + black st |
|---|----------|-------------------------------------------------------------|

## HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 3 | N/A      | HUB BODY                                    |
| 4 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 5 | V2373701 | KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019 |
| 7 | N/A      | HUB BODY                                    |
| 8 | V2373801 | KIT 20x110mm AXLE QRM AUTO MTB > 2019       |

## OPTIONS

|          |                                |
|----------|--------------------------------|
| V2650401 | TORQUECAP20*31 FT QRM AUTO MTB |
|----------|--------------------------------|

## ADAPTERS

|   |          |                                       |
|---|----------|---------------------------------------|
| 6 | 12982801 | ADAPTER Ft 20 to 15mm                 |
| 9 | V2680401 | 20x110 BOOST Front Adapter MTB wheels |



# Deemax DH

### DELIVERED WITH

|                                           |                                                                                   |
|-------------------------------------------|-----------------------------------------------------------------------------------|
| UST valve and accessories<br>(129 838 01) |  |
| Tubeless rim tape                         |                                                                                   |

### COMPATIBILITY

|                                                                                |  |
|--------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                  |  |
| Front axle: 15mm, convertible to 20mm thru axle with included adapters         |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters |  |
| Freewheel: Shimano Micro Spline                                                |  |

### Specifications

#### RIMS

- **Material** : Mactal
  - **Joint** : SUP
  - **Drilling** : traditional
  - **Valve hole diameter** : 6.5 mm
  - **Tyre** : UST Tubeless and tubetype
  - **Internal width** : 28 mm
  - **ETRTO size 27.5"** : 584x28TC
  - **ETRTO size 29"** : 622x28TC
- Use with Mavic Tubeless Tape

#### SPOKES

- **Material** : steel
- **Shape** : straight pull, flat, double butted
- **Count** : 28 front and rear
- **Lacing** : front and rear crossed 3

#### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Auto adjust sealed cartridge bearings (QRM Auto), front and rear
- **Freewheel** : Instant Drive 360

#### VERSIONS

- **Color** : Black only
  - **Disc standard** : 6 Bolts only
- Freewheel; SRAM XD, Shimano HG, Shimano Micro-Spline
- **Hub width** : Boost (front 15/20x110, rear 148) or Non-Boost (front 15/20x100, rear 135/142) or DH rear (150/157) or DH7S rear (150/157-7S)

#### WHEEL WEIGHTS