

### ASTM CATEGORY 3 : CROSS COUNTRY

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Recommended tyre sizes: 50mm to 76mm (2.0" to 3.0")


Maximum tyre pressure: 4.1bar/59PSI with a 28mm tyre - 2.45bar/36PSI with a 64mm tyre

Recommended tire sizes: 28 to 64 mm (1.1" to 2.5")

### REFERENZEN RÄDER

|        |                       |
|--------|-----------------------|
| R37042 | XMAX SL INT 29 BST HG |
| R38052 | XMAX SL INT 29 BST XD |

|        |                      |
|--------|----------------------|
| R39142 | XMAX SL CL 29 BST MS |
|--------|----------------------|

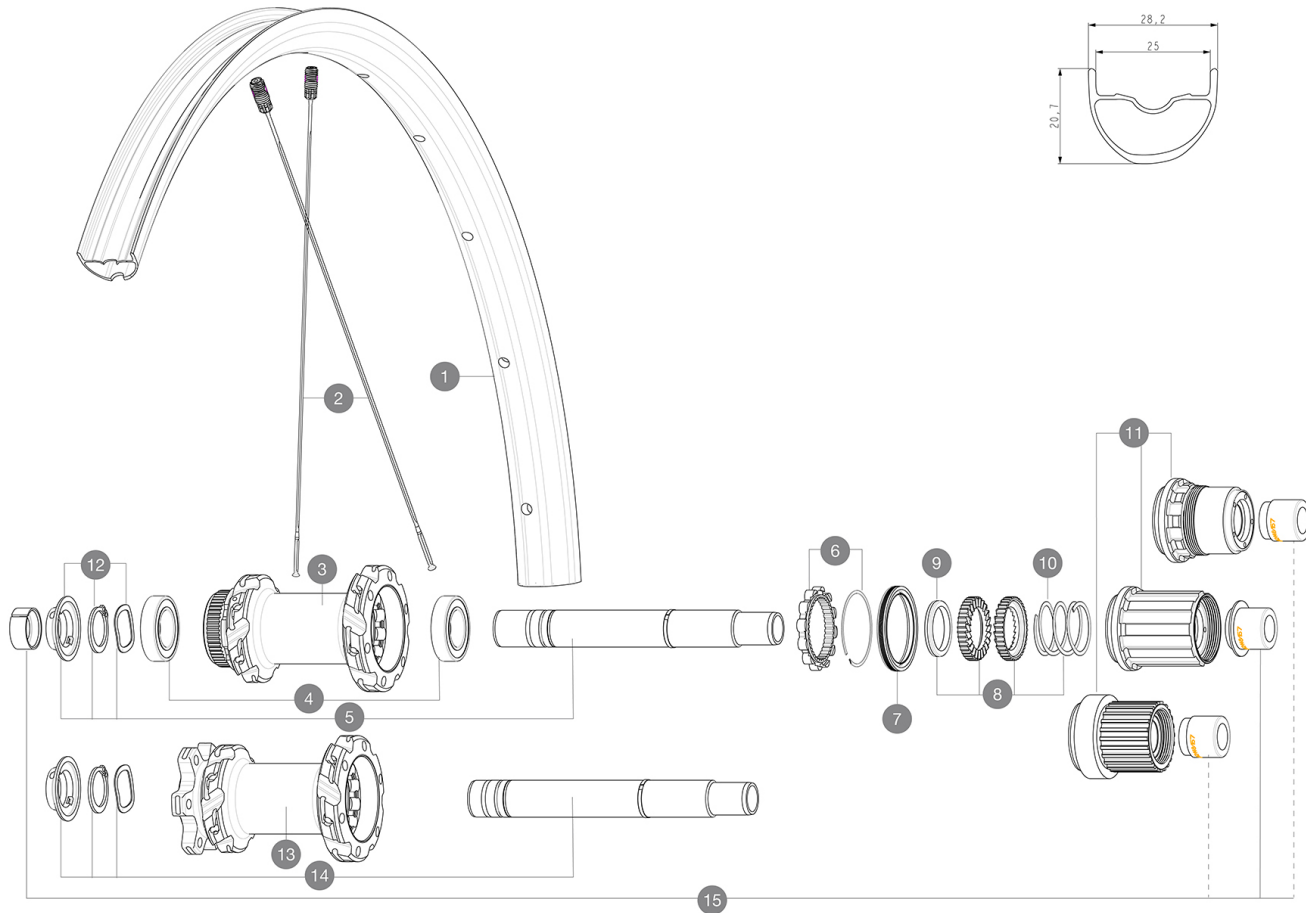

### RIMS



&NBSP;:

|   |          |                                       |
|---|----------|---------------------------------------|
| 1 | V3765715 | Kit Front/Rear rim Crossmax SL 21 29" |
|---|----------|---------------------------------------|

### SPOKES

|   |          |                                                             |
|---|----------|-------------------------------------------------------------|
| 2 | V2388301 | Kit 12 Front/Rear Crossmax SL/SLS/XL/XLS 29" butted spoke 2 |
|---|----------|-------------------------------------------------------------|

### HUB SHELLS

|    |           |                                                            |
|----|-----------|------------------------------------------------------------|
| 3  | N/A       | NABENKÖRPER                                                |
| 4  | M40076    | HUB BEARINGS 17x30x7 6903 x 2                              |
| 5  | V2375701  | Kit ID360 148 DCL axle with circlip                        |
| 6  | V2252701  | KIT ID360 INSERT SHAPED EAR LOBE > 2017                    |
| 7  | V00063631 | Kit ID360 seal version 2 (larger)                          |
| 8  | V2375201  | KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific) |
| 9  | V2375401  | KIT ID360 MTB 24T 3 NOISE REDUCING PADS                    |
| 10 | V2372901  | KIT 3 ID360 MTB SPRINGS                                    |
| 11 | V3740101  | XD MTB Freewheel Body ID360                                |
| 11 | V3990101  | MicroSpline MTB Freewheel Body ID360                       |
| 11 | V3780101  | HG9 Alloy MTB Freewheel Body ID360                         |
| 12 | V2373001  | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing      |
| 13 | N/A       | NABENKÖRPER                                                |
| 14 | V2372201  | KIT ID360 148 D6T AXLE WITH CLIP                           |

### OPTIONS

|   |          |                                                           |
|---|----------|-----------------------------------------------------------|
| 8 | V2372801 | KIT ID360 2x40 TEETH RATCHETS + MTB SPRING + GREASE + PAD |
|---|----------|-----------------------------------------------------------|

### ADAPTERS

|    |          |                                                 |
|----|----------|-------------------------------------------------|
| 15 | V2510701 | ID360 EVO REAR AXLE ADAPTERS 12x142mm DCL & D6T |
|    | V2510801 | ID360 EVO REAR AXLE ADAPTERS 9x135mm DCL & D6T  |



# CROSSMAX SL 29

GELIEFERT MIT

|                                                                             |  |
|-----------------------------------------------------------------------------|--|
| 2 replacement spokes with each wheel                                        |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Bedienungsanleitung                                                         |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |
| Fore adjustment wrench                                                      |  |
| Fore adjustment wrench                                                      |  |

COMPATIBILITY

|                                                                                                             |  |
|-------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano HG9, XD or Micro Spline                                                                  |  |
| Front axle: 15x110 Boost thru axle                                                                          |  |
| Rear axle: 12x148 Boost thru axle                                                                           |  |
| Freilaufkörper: SHIMANO HG MTB Stahl-konverter<br>(Kit V3790101 separat erhältlich)                         |  |
| Adapter Hinterachse: 12x148 umwandelbar in 9x141 (Kit V2510801 separat erhältlich)                          |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                                                  |  |
| Rear axle: 12x148 Boost thru axle                                                                           |  |
| Rear axle: 12x148 Boost thru axle                                                                           |  |
| Front axle: 15x110 Boost thru axle                                                                          |  |
| Front axle: 15x110 Boost thru axle                                                                          |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                                                  |  |
| Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel) |  |
| VR-Achse: nur 1/4r Schraubmuttern (im Lieferumfang enthalten), M10x1-Gewinde                                |  |

Specifications

FELGEN

- Material : S6000 Aluminum
- Material : Maxtal
- Material : Maxtal
- Material : Maxtal
- Material : Maxtal
- Tire : UST Tubeless and tubetype
- Material : S6000 Aluminum
- Material : S6000 Aluminum
- Internal width : 25 mm
- ETRTO size 29" : 622x25TSS

RADNABE

- Körpermaterial : aluminium
- Körperdesign : INFINITY
- Infinity Hub
- Axles : Front 15X110 Boost ; Rear 12X148 Boost
- Standard Disc : 6 Löcher oder Center Lock®
- Hub available with 6-bolt or center lock (R) brake rotors
- Material der Achse : Aluminium
- Achsgrößen : vorne 15x110 / hinten 12x148
- Freilauftechnologie : Instant Drive 360

RADGEWICHTE

910