


ASTM CATEGORY 1 : road only  
Recommended weight limit : 120kg  
Recommended tyre sizes: 23 to 32 mm  
Max. Pressure: 25mm 7.7 bars - 110 PSI

### REFERENCES WHEELS

F34301 KsyProExalithSLft

F70901

KsyProExalithSLft Limited

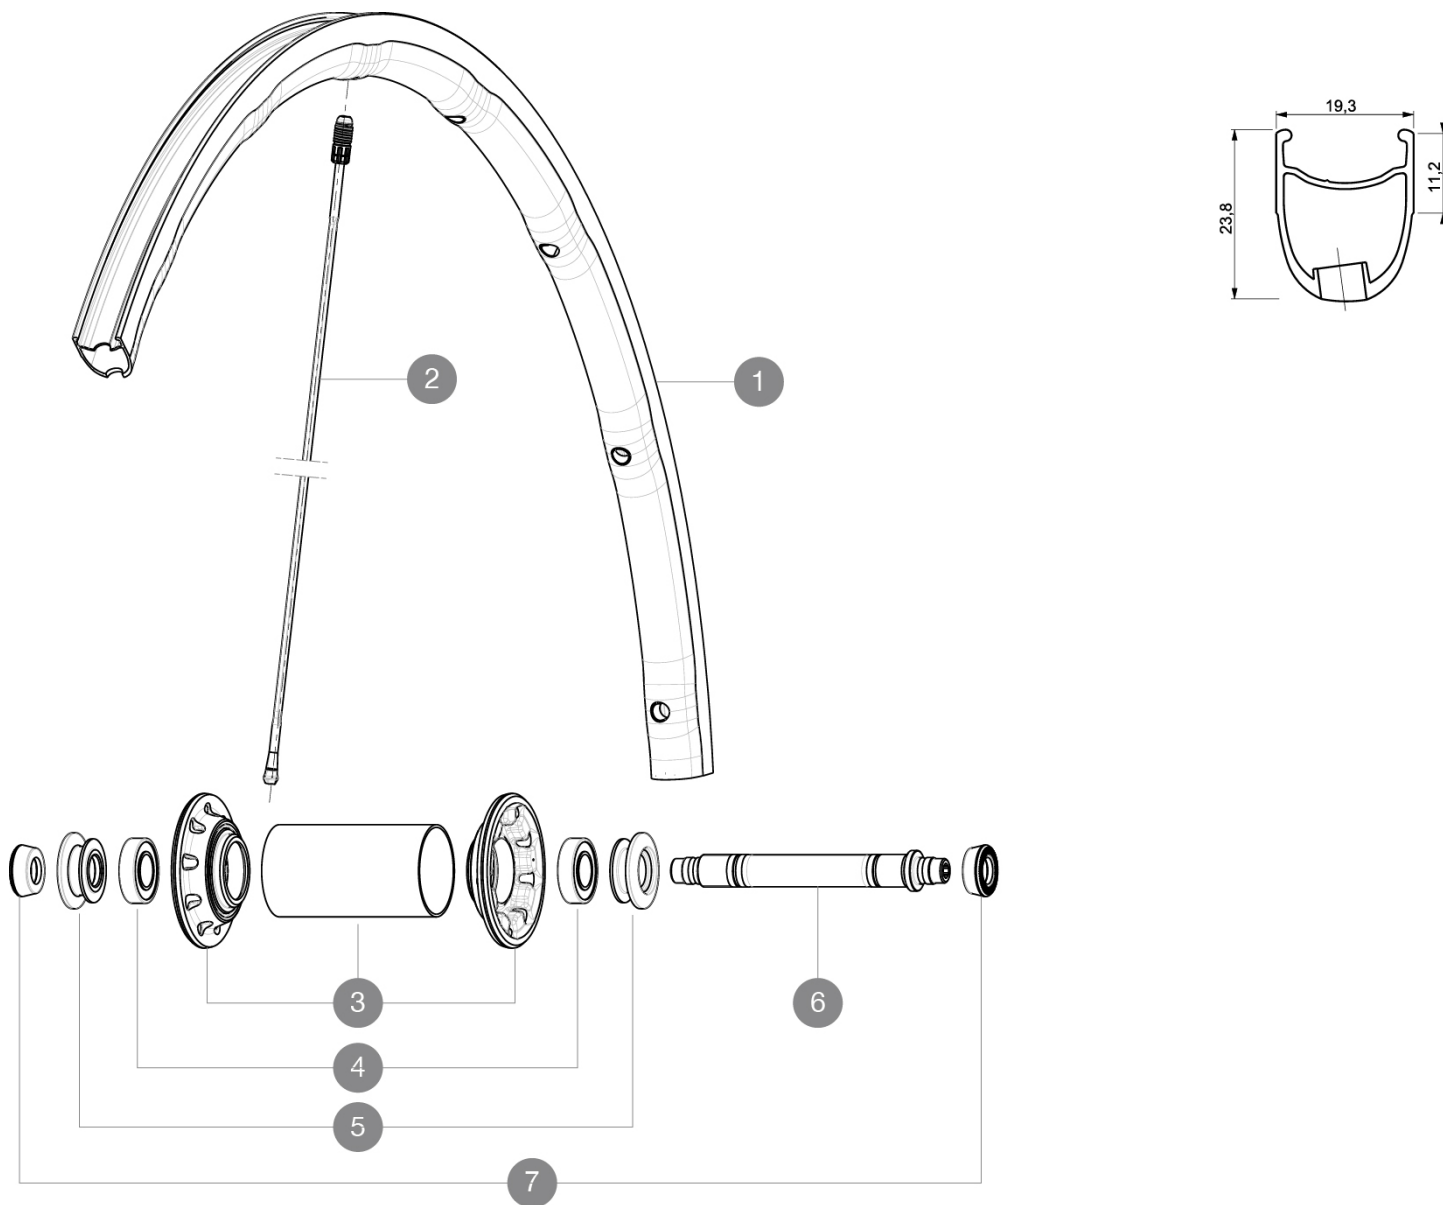

### RIMS



VALVE HOLE  $\bar{A}$  (MM): 6.5 :

|   |          |                                               |
|---|----------|-----------------------------------------------|
| 1 | V2405110 | KIT FRONT RIM KSYRIUM PRO EXALITH SL LTD      |
| 1 | V2290110 | KIT FRONT RIM KSYRIUM PRO SL EXALITH (SLR 15) |

### SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V2272901 | KIT 1 FT282+1 RR293 KSY PRO EXAL SL LTD SPK - while stock la |
| 2 | V2270601 | KIT 9 FT KSY SLR/K125/PRO EXA SPK 282,5mm                    |

### HUB SHELLS

|   |          |                                          |
|---|----------|------------------------------------------|
| 3 | N/A      | HUB BODY                                 |
| 4 | M40078   | FRONT HUB BEARINGS 6901 x 2              |
| 5 | M40759   | ADJUSTING BEARING NUT + FRONT CAP        |
| 6 | 32999801 | FRONT AXLE KIT R-SYS/KSYRIUM SL/SLS 2013 |

### ADAPTERS

|   |          |                                                         |
|---|----------|---------------------------------------------------------|
| 7 | 35117301 | FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T |
|---|----------|---------------------------------------------------------|

# MAVIC Ksyrium Pro Exalith SL

## DELIVERED WITH

|                                 |  |
|---------------------------------|--|
| BR601 quick releases            |  |
| BR601 quick releases            |  |
| Exalith brake pads              |  |
| Exalith brake pads              |  |
| Multifunction adjustment wrench |  |
| Tracomp ring tool               |  |
| User guide                      |  |
| Multifunction adjustment wrench |  |
| Tracomp ring tool               |  |
| User guide                      |  |

## COMPATIBILITY

|                                                                              |  |
|------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Front axle: Quick Release only                                               |  |
| Rear axle: Quick Release only                                                |  |

## Specifications

### RIMS

- **Material** : Maxtal
- **Height** : front 24mm, rear 26 asymmetrical
- **Joint** : SUP
- **Drilling** : Fore
- **Brake track** : Exalith 2
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Material** : Maxtal
- **Tyre** : clincher
- **ETRTO size** : 622x15C
- **Height** : front 24mm, rear 26 asymmetrical
- **Recommended tyre sizes** : 23 to 32 mm
- **Joint** : SUP
- **Drilling** : Fore
- **Brake track** : Exalith 2
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Tyre** : clincher
- **Internal width** : 15mm
- **ETRTO size** : 622x15C

### SPOKES

- **Material** : front and rear drive side Zicral, Rear non drive side carbon fiber
- **Shape** : front and rear drive side straight pull bladed double butted, rear non drive side Tracomp
- **Nipples** : Fore integrated aluminum
- **Material** : front and rear drive side Zicral, Rear non drive side carbon fiber
- **Count** : front 18, rear 20
- **Lacing** : radial front and rear non-drive side, crossed 2 rear drive side

### WHEEL HUB

- **Front body** : carbon with aluminum flanges
- **Rear body** : aluminum
- **Rear body** : aluminum
- **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Front body** : carbon with aluminum flanges
- **Freewheel** : FTS-L steel
- **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : FTS-L steel

### VERSIONS

- **Color** : Black only

### WHEEL WEIGHTS

Wheel weight 605