MAVIC Ksyrium Pro Exalith

ASTM CATEGORY 1 : road only
Recommended weight limit : 120kg

REFERENCES WHEELS

F34501	KsyProExalithFt

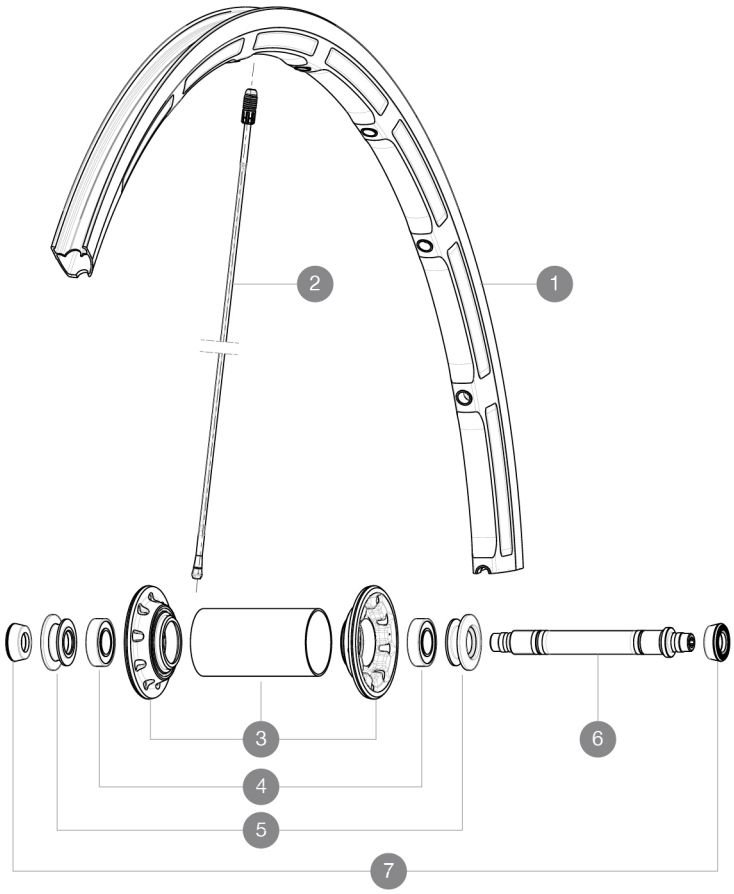



RIMS

VALVE HOLE Ã (MM): 6.5 :

1	V2290310	KIT FRONT RIM KSYRIUM SLE

SPOKES

2	33000301	KIT 10 FT KSYRIUM SLS C/T BLK SPK 283,5mm

HUB SHELLS

3	N/A	HUB BODY
4	M40078	FRONT HUB BEARINGS 6901 x 2
5	M40759	ADJUSTING BEARING NUT + FRONT CAP
6	32999801	FRONT AXLE KIT R-SYS/KSYRIUM SL/SLS 2013

ADAPTERS

7	35117301	FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T

Download date: 2024-07-16 / Update date: 2022-03-01

MAVIC Ksyrium Pro Exalith

DELIVERED WITH

BR601 quick releases	
Exalith brake pads	
Multifonction adjustment wrench	
User guide	

Specifications

RIMS

- **Material :** Maxtal
- **Height :** front 22 mm, rear 25 mm asymmetrical
- **Joint :** SUP
- **Drilling :** Fore
- **Brake track :** Exalith 2
- **Weight reduction :** ISM 3D
- **Valve hole diameter :** 6.5 mm
- **Tyre :** clincher
- **ETRTO size :** 622x15C
- **Recommended tyre sizes :** 23 to 32 mm

SPOKES

- **Material :** Zicral
- **Shape :** straight pull, bladed, front double butted
- **Nipples :** Fore integrated aluminum
- **Count :** front 18, rear 20
- **Lacing :** front radial, rear Isopulse

WHEEL HUB

- **Front body :** carbon with aluminum flanges
- **Rear body :** aluminum
- **Axle material :** aluminum

Adjustable sealed cartridge bearings

- **Freewheel :** FTS-L steel

WHEEL WEIGHTS

Wheel weight 605

Download date: 2024-07-16 / Update date: 2022-03-01