

**MAVIC** **CROSSRIDE FTS-X 26**

ASTM CATEGORY 3 : offroad with jumps less than 61cm

ID360 Shimano steel freewheel body (IV3790101)

Maximum tyre pressure: 6.1bar/88PSI with a 25mm tyre - 3.5bar/51PSI with a 64mm tyre

Recommended weight limit : 120kg

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

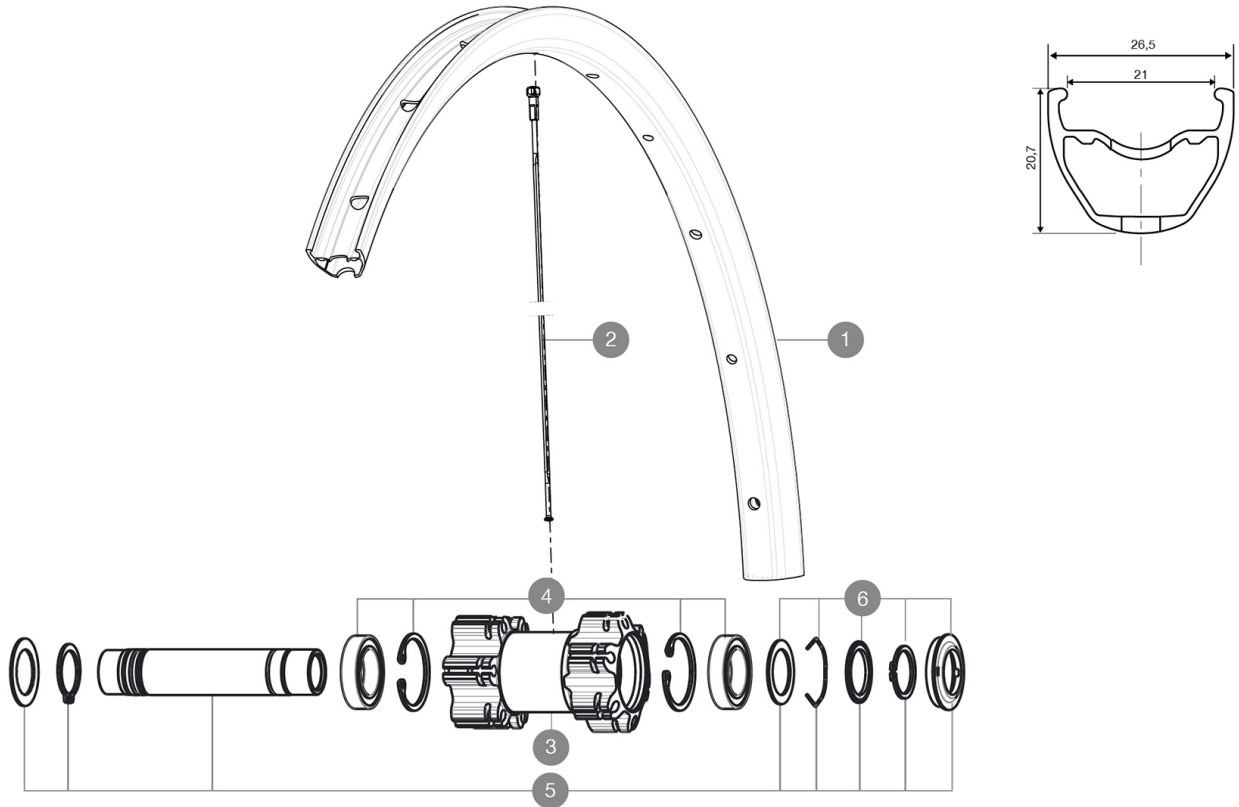
Recommended tire sizes: 28 to 64 mm (1.1" to 2.5")

ETRTO recommended tyre sizes: 35mm to 69mm (1.4" to 2.7")

ID360 N3W freewheel body (IV4270101)

**REFERENCES WHEELS**

F50501 XRIDE FTS-X INT 26 QR

**RIMS**

VALVE HOLE (MM): 8,5 WITH POP OFF REDUCER :

1 V2314715 "KIT FRT/RR RIM CROSSRIDE/CROSSRIDE FTSX 26""

**SPOKES**

2 36689801 KIT 12 FT/NDS CROSSONE SPK 264mm

**HUB SHELLS**

3 N/A HUB BODY  
 4 99688501 BEARING KIT 9/12/15 D6T HUB 20x32x7 6804  
 5 V2370101 KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last  
 6 V2370301 KIT FRONT AUTO ADJUSTING PLAY 15mm AXLE

