


MAVIC E-DEEMAX S 27.5

1
2024
REAR

REFERENCES WHEELS

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT
Minimum tyre size: width 52mm - pressure max. 2.95Bar/43PSI
Non-Boost : 12 to 9mm rear adapter for quick release (V2510801)
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

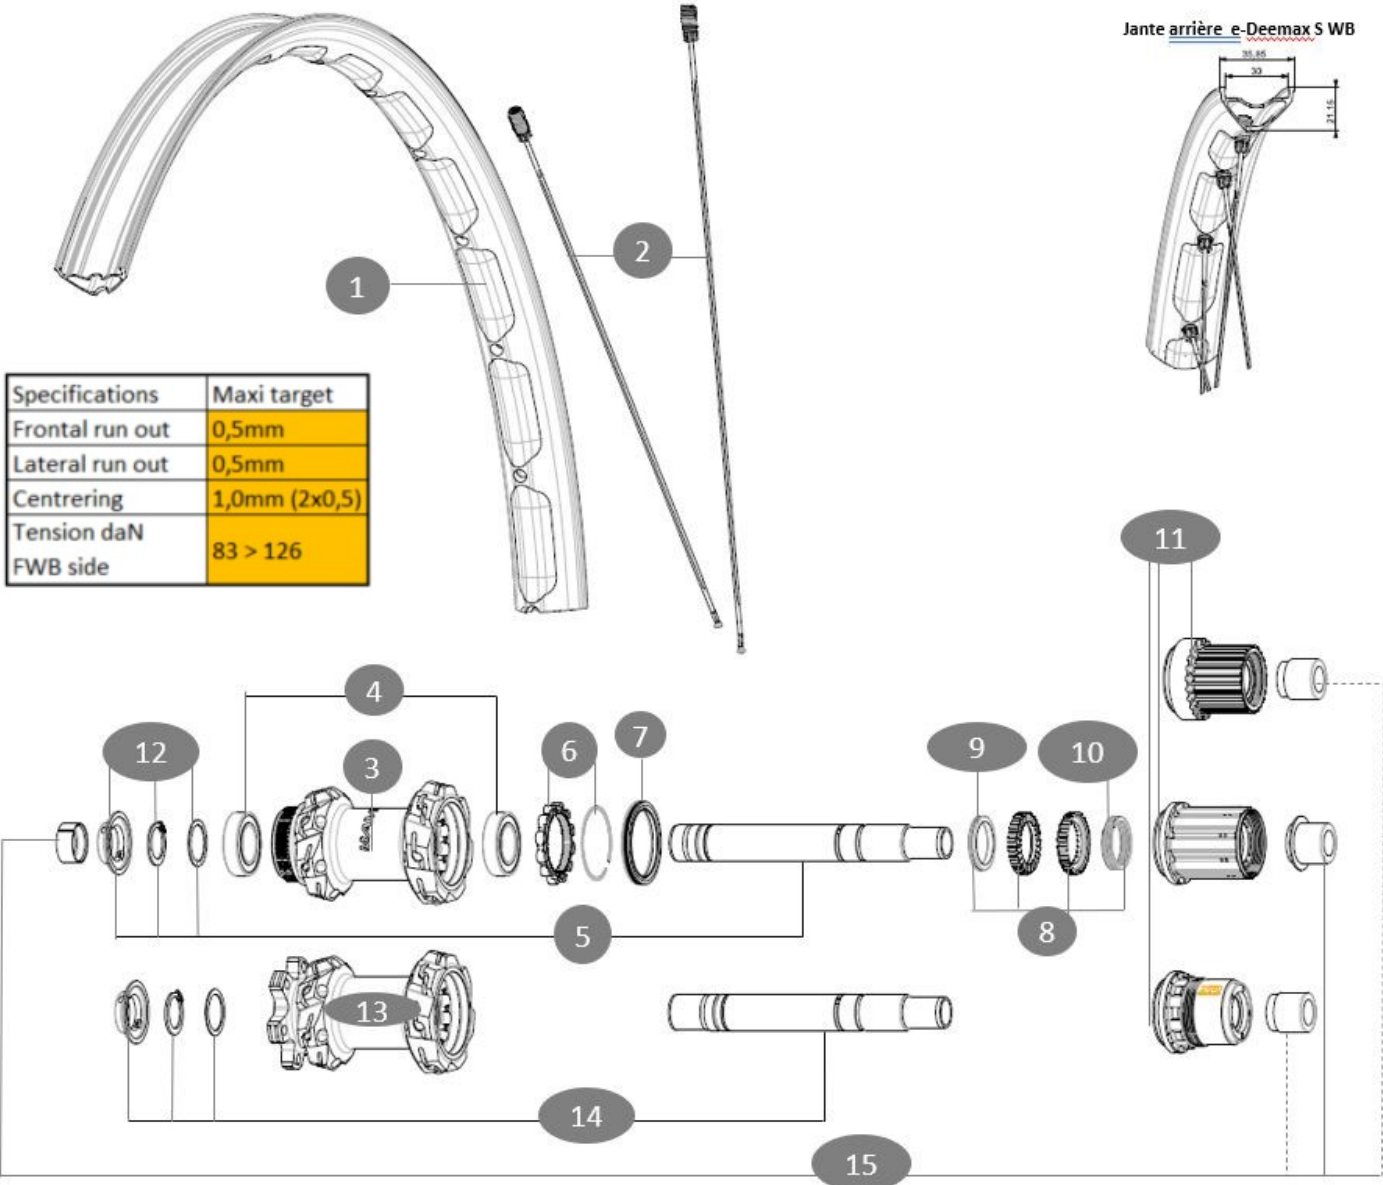

RIMS



&NBSP;:

1	V00100531	Kit Front/Rear rim eDeemax S30 24 27,5"
---	-----------	---

SPOKES

2	V00100931	Kit 14 steel spokes 286mm eDeemax S30 24 27,5"
---	-----------	--

HUB SHELLS

3	N/A	HUB BODY
4	M40076	HUB BEARINGS 17x30x7 6903 x 2
5	V2375701	Kit ID360 148 DCL axle with circlip
6	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
7	V2251601	KIT ID360 SEAL + GREASE
8	V2375201	KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific)

9	V2375401	KIT ID360 MTB 24T 3 NOISE REDUCING PADS
10	V2372901	KIT 3 ID360 MTB SPRINGS
11	V3740101	XD MTB Freewheel Body ID360
11	V3990101	MicroSpline MTB Freewheel Body ID360
11	V3780101	HG9 Alloy MTB Freewheel Body ID360
13	N/A	HUB BODY
14	V2372201	KIT ID360 148 D6T AXLE WITH CLIP

ADAPTERS

15	V2510701	ID360V2RrAxleAdapt12x142/148
----	----------	------------------------------

MAVIC

E-DEEMAX S 27.5

DELIVERED WITH

User guide	
UST valve and accessories (129 838 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
User guide	
UST valve and accessories (129 838 01)	
2 replacement spokes with each wheel	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
2 replacement spokes with each wheel	

COMPATIBILITY

Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Boost 20 to 15mm front adapter ([12982801]	
Front axle: for fixing nuts only (included), M9x1 thread	
Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)	
Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)	
Front axle: for fixing nuts only (included), M9x1 thread	

Specifications

RIMS

- Material : Mxtal
- Material : Mxtal
- Height : 22 mm
- Height : 22 mm
- Joint : SUP welding technology
- Joint : SUP welding technology
- Internal width : 30 mm
- Internal width : 30 mm
- Drilling : Fore tapeless tubeless technology (front/rear 28 holes)
- Drilling : Fore tapeless tubeless technology (front/rear 28 holes)
- Disc brake specific profile
- Disc brake specific profile
- Asymmetrical rim design
- Asymmetrical rim design
- ETRTO size : 584x30TC
- ETRTO size 29" : 622x30TC
- Tire : UST Tubeless and tubetype
- Tire : UST Tubeless and tubetype

SPOKES

- Material : steel
- Material : steel
- Shape : straight pull, round
- Shape : straight pull, round
- Lacing : front and rear crossed 3
- Lacing : front and rear crossed 3
- Front axle : convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)
- Boost : Torque Caps ([V2650401])
- 12mm front hub cap ([V2680501])

WHEEL HUB

- Body : aluminum
- Body : aluminum
- Body design : INFINITY
- Body design : INFINITY
- Disc standard : 6 Bolts or Center Lock®
- Disc standard : 6 Bolts or Center Lock®
- Axle material : aluminum
- Axle material : aluminum
- Rear body : aluminum
- Rear body : aluminum
- Axles : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- Axles : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- Rear : Quick Release, 12x142 and 12x135 compatible
- Rear : Quick Release, 12x142 and 12x135 compatible
- Freewheel : FTS-L steel
- Freewheel : FTS-L steel

WHEEL WEIGHTS

1075