

MAVIC E-CROSSRIDE 1 29

1
2023
FRONT



ASTM CATEGORY 3 : CROSS COUNTRY

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included


Minimum tyre size: width 52mm - pressure max. 2.35Bar/34PSI

Maximum tyre size: width 125mm - pressure max. 1.25Bar/18PSI

REFERENCES WHEELS

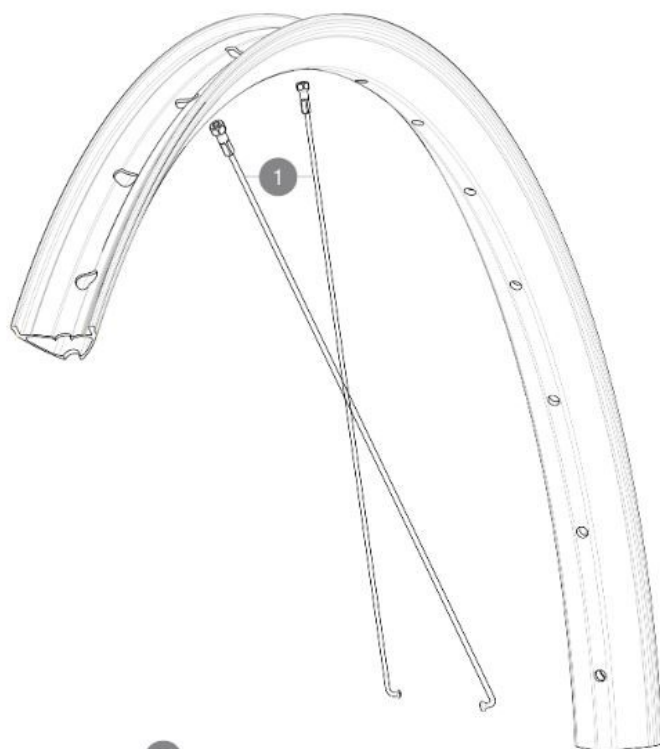

Specifications	Maxi target
Frontal run out	0,5mm
Lateral run out	0,5mm
Centring	1,0mm (2x0,5)
Tension daN	106 > 137
Disc side	

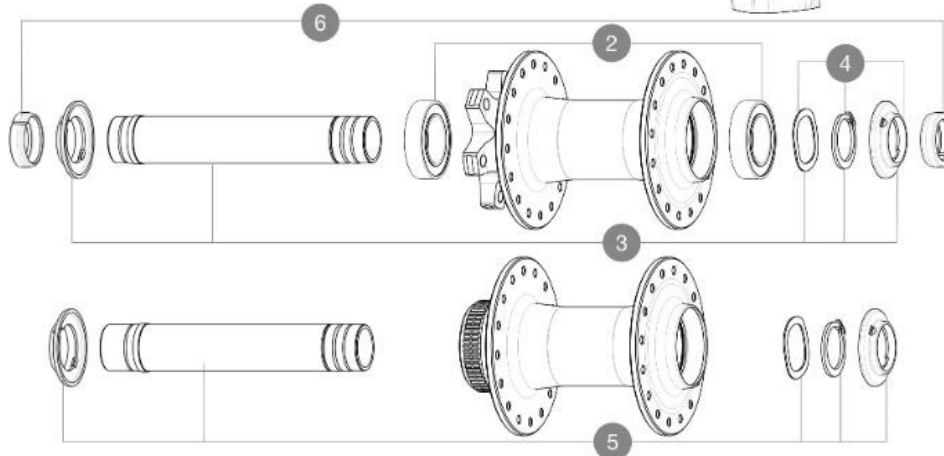

SPOKES

1 V00062431 Kit 16 ft/rr Jbent bk rd spk 293 29"+np

HUB SHELLS

2 V2500901 KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
3 V2372401 KIT 110mm AXLE QRM AUTO MTB > 2019
4 V2373001 KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing
5 V2375601 Kit 110mm axle QRM auto MTB from 2019 DCL

OPTIONS

V2374401 TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB

ADAPTERS

5 V2372501 15mm MTB Axle Cap QRM Auto From 2019
99694101 ADAPTER Ft 15 to 9mm QR



E-CROSSRIDE 1 29

DELIVERED WITH

User guide	
Pre-installed tubeless rim tape	
User guide	
Pre-installed tubeless rim tape	

COMPATIBILITY

Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)	

Specifications

RIMS

- Material : S6000 Aluminum
- Material : S6000 Aluminum
- Height : 21 mm
- Height : 21 mm
- Joint : sleeved
- Joint : sleeved
- Internal width : 30 mm
- Internal width : 30 mm
- Drilling : traditional (front/rear 32 holes)
- Drilling : traditional (front/rear 32 holes)

Disc brake specific profile

Disc brake specific profile

E-Bike specific rim profile

E-Bike specific rim profile

- ETRTO size 29" : 622x30TSS
- ETRTO size 29" : 622x30TSS
- Tire : clincher
- Tire : clincher

SPOKES

- Material : steel
- Material : steel
- Count : 20 front and rear
- Count : 20 front and rear
- Rear axle : 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)
- 12mm front hub cap (V2680501)

WHEEL HUB

- Body : aluminum
- Body : aluminum
- Body design : CLASSIC
- Body design : CLASSIC
- Disc standard : 6 Bolts or Center Lock®
- Disc standard : 6 Bolts or Center Lock®
- Axle material : aluminum
- Axle material : aluminum
- Rear body : aluminum
- Rear body : aluminum
- Axles : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- Axles : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- Freewheel : Shimano HG MTB / Shimano MS / Sram XD MTB / Single Speed
- Freewheel : Shimano HG MTB / Shimano MS / Sram XD MTB / Single Speed
- Freewheel : FTS-L steel
- Freewheel : FTS-L steel

WHEEL WEIGHTS