



ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Minimum tyre size: width 52mm - pressure max. 2.95Bar/43PSI

Non-Boost : 12 to 9mm rear adapter for quick release (V2510801)

## REFERENCES WHEELS

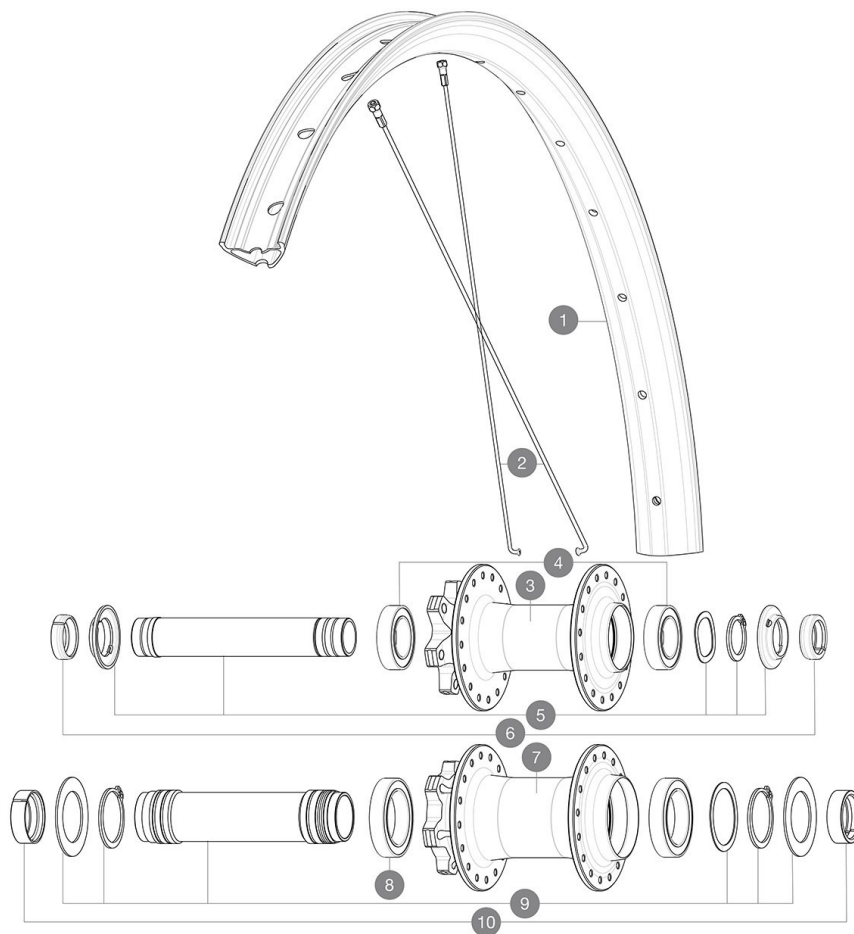

| Specifications  | Maxi target   |
|-----------------|---------------|
| Frontal run out | 0,5mm         |
| Lateral run out | 0,5mm         |
| Centrerig       | 1,0mm (2x0,5) |
| Tension daN     | 99 > 121      |
| Disc side       |               |

## RIMS



&NBSP;:

|   |           |                                        |
|---|-----------|----------------------------------------|
| 1 | V00096631 | Kit Front/Rear rim Deemax Park 27,5"   |
|   | V3750101  | 35mm UST Green Tape for 30mm wide rims |

## SPOKES

|   |           |                                         |
|---|-----------|-----------------------------------------|
| 2 | V00062531 | Kit 16ft/rr Jbent bk rd spk275 27,5"+np |
|---|-----------|-----------------------------------------|

## HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP  |
| 5 | V2372401 | KIT 110mm AXLE QRM AUTO MTB > 2019          |
| 8 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 9 | V2373701 | KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019 |

## ADAPTERS

|    |          |                                       |
|----|----------|---------------------------------------|
| 6  | V2372501 | 15mm MTB Axle Cap QRM Auto From 2019  |
| 10 | V2680401 | 20x110 BOOST Front Adapter MTB wheels |

DELIVERED WITH

|                                                        |  |
|--------------------------------------------------------|--|
| User guide                                             |  |
| UST valve and accessories<br>(129 838 01)              |  |
| Pre-installed tubeless rim tape                        |  |
| User guide                                             |  |
| Pre-installed tubeless rim tape                        |  |
| UST valve and accessories<br>(129 838 01)              |  |
| 2 replacement spokes with each wheel                   |  |
| 12 to 9mm rear adapter for quick release<br>(V2510801) |  |
| 2 replacement spokes with each wheel                   |  |

COMPATIBILITY

|                                                                                                                                                                                                                                                                                      |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)                                                                                                                                                                                                                |  |
| Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)                                                                                                                                                                                                                |  |
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)                                                                                                                                                                                                      |  |
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)                                                                                                                                                                                                      |  |
| ID360 Shimano / Sram freewheel body (V3430101) - Delivered on the wheel)                                                                                                                                                                                                             |  |
| Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)                                                                                                                                                                                                       |  |
| Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)                                                                                                                                                                                                       |  |
| QRM Auto bearing preload technology<br>Qualité de Roulements Mavic Auto<br>Our latest innovation. Those cartridge bearings are of course double sealed with C3 internal clearance. Their preload is automatically adjusted to guarantee a perfect spin with no play on the long run. |  |
| ID360 Shimano / Sram freewheel body (V3430101) - Delivered on the wheel)                                                                                                                                                                                                             |  |
| QRM Auto bearing preload technology<br>Qualité de Roulements Mavic Auto<br>Our latest innovation. Those cartridge bearings are of course double sealed with C3 internal clearance. Their preload is automatically adjusted to guarantee a perfect spin with no play on the long run. |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)                                                                                                                                                                               |  |

Specifications

RIMS

- Material : Mxxtal
- Material : Mxxtal
- Height : 22 mm
- Height : 22 mm
- Joint : SUP welding technology
- Joint : SUP welding technology
- Internal width : 30 mm
- Internal width : 30 mm
- Drilling : traditional (front/rear 32 holes)
- Drilling : traditional (front/rear 32 holes)

- Disc brake specific profile
- Disc brake specific profile
- Asymmetrical rim design
- Asymmetrical rim design
- ETRTO size 27.5" : 584x30TC
  - ETRTO size 27.5" : 584x30TC
  - Tire : clincher
  - Tire : clincher

SPOKES

- Material : steel
- Material : steel
- Count : 20 front and rear

WHEEL HUB

- Body : aluminum
  - Body : aluminum
  - Body design : CLASSIC
  - Body design : CLASSIC
  - Disc standard : 6 Bolts only
  - Disc standard : 6 Bolts only
  - Axle material : aluminum
  - Axle material : aluminum
- Infinity hubs
- Infinity hubs
- Axles : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
  - Axles : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
  - Axles : Front 15X110 Boost ; Rear 12X148 Boost
  - Axles : Front 15X110 Boost ; Rear 12X148 Boost
  - Freewheel : FTS-L steel
  - Freewheel : FTS-L steel

WHEEL WEIGHTS

1140