MAVIC CrossrideTubelessPulseWTS27.5

2016
FRONT

ASTM CATEGORY 3 : offroad with jumps less than 61cm
Recommended weight limit : 120kg

REFERENCES WHEELS

F36001	XRideUST Pulse27.5FtWTS

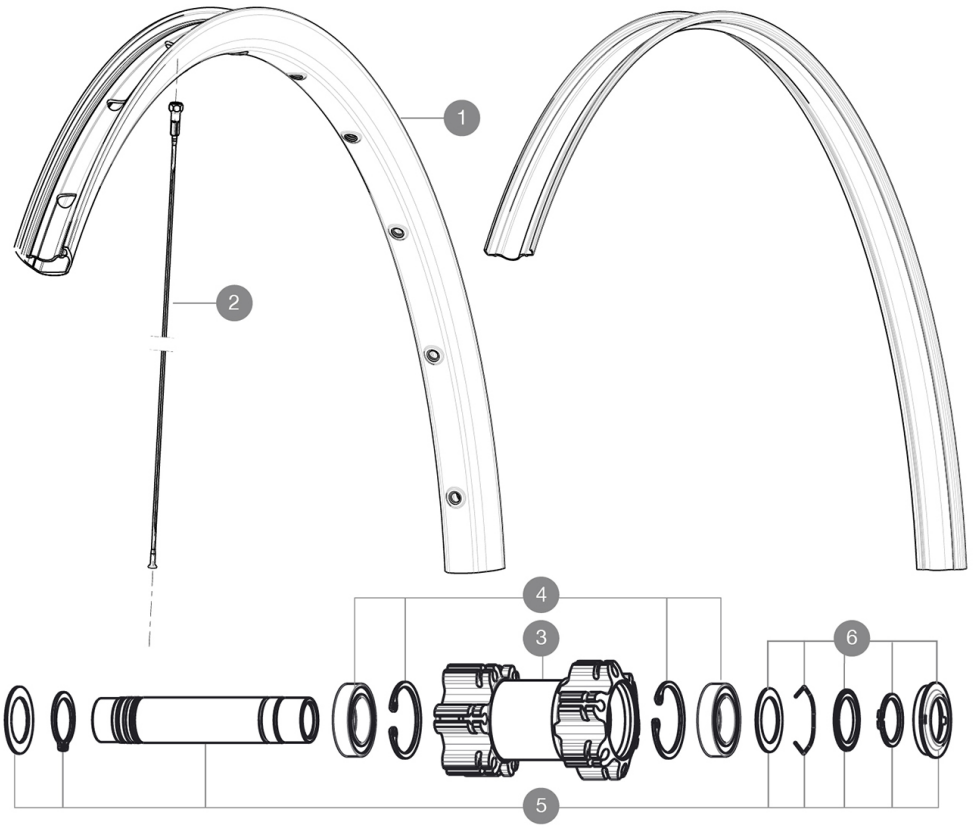



RIMS

Ã VALVE HOLE (MM): 6,5 :

1	V2314215	"KIT FRONT/REAR RIM CROSSRIDE TUBELESS 27,5"""
	V2180101	UST RIM STRIP 27.5x21c

SPOKES

2	V2381801	KIT 12 FT/NDS XRIDE LIGHT 27,5'' SPK 277mm

HUB SHELLS

3	N/A	HUB BODY
4	99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804
5	V2371101	KIT FRONT QRM AXLE 100mm/BOOST 110mm
5	V2370101	KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last
6	V2370301	KIT FRONT AUTO ADJUSTING PLAY 15mm AXLE

Download date: 2024-07-16 / Update date: 2022-03-01

MAVIC CrossrideTubelessPulseWTS27.5

DELIVERED WITH

1 bottle of Mavic Sealant	
Tubeless rim tape	
UST valve and accessories	
Rear 12x142mm adapters	
Valve reducer	
User guide	

Specifications

RIMS

- **Material :** S6000 Aluminum
- **Joint :** sleeved
- **Drilling :** traditional with H2 reinforcement

Disc brake specific profile

- **Valve hole diameter :** 8,5 mm with pop off reducer
- **Tyre :** UST Tubeless and tubetype
- **Internal width :** 21 mm
- **ETRTO size 26" :** 559x21C
- **ETRTO size 27.5" :** 584x21C
- **ETRTO size 29" :** 622x21C
- **ETRTO recommended tyre sizes :** 35mm to 69mm (1.4" to 2.7")

SPOKES

- **Material :** steel
- **Shape :** straight pull, bladed, double butted
- **Nipples :** brass, ABS
- **Count :** 24 front and rear
- **Lacing :** front and rear crossed 2

WHEEL HUB

- **Front and rear bodies :** aluminum
- **Axle material :** aluminum

Sealed cartridge bearings

- **Freewheel :** TS-2 alloy

Shimano 11 speeds compatible
Sram XD Compatible (XX1-X01) with optionnal kit

WHEEL WEIGHTS

Wheel weight
Weight Front 27.5": 875
Weight Front 29": 920

Download date: 2024-07-16 / Update date: 2022-03-01