

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included


Maximum tyre pressure: 3.2bar/46PSI with a 47mm tyre - 2.85bar/41PSI with a 64mm tyre

Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")

## REFERENCES WHEELS

F92171 Deemax 29 21 Ft

F92181 DEEMAX INT 29 BST

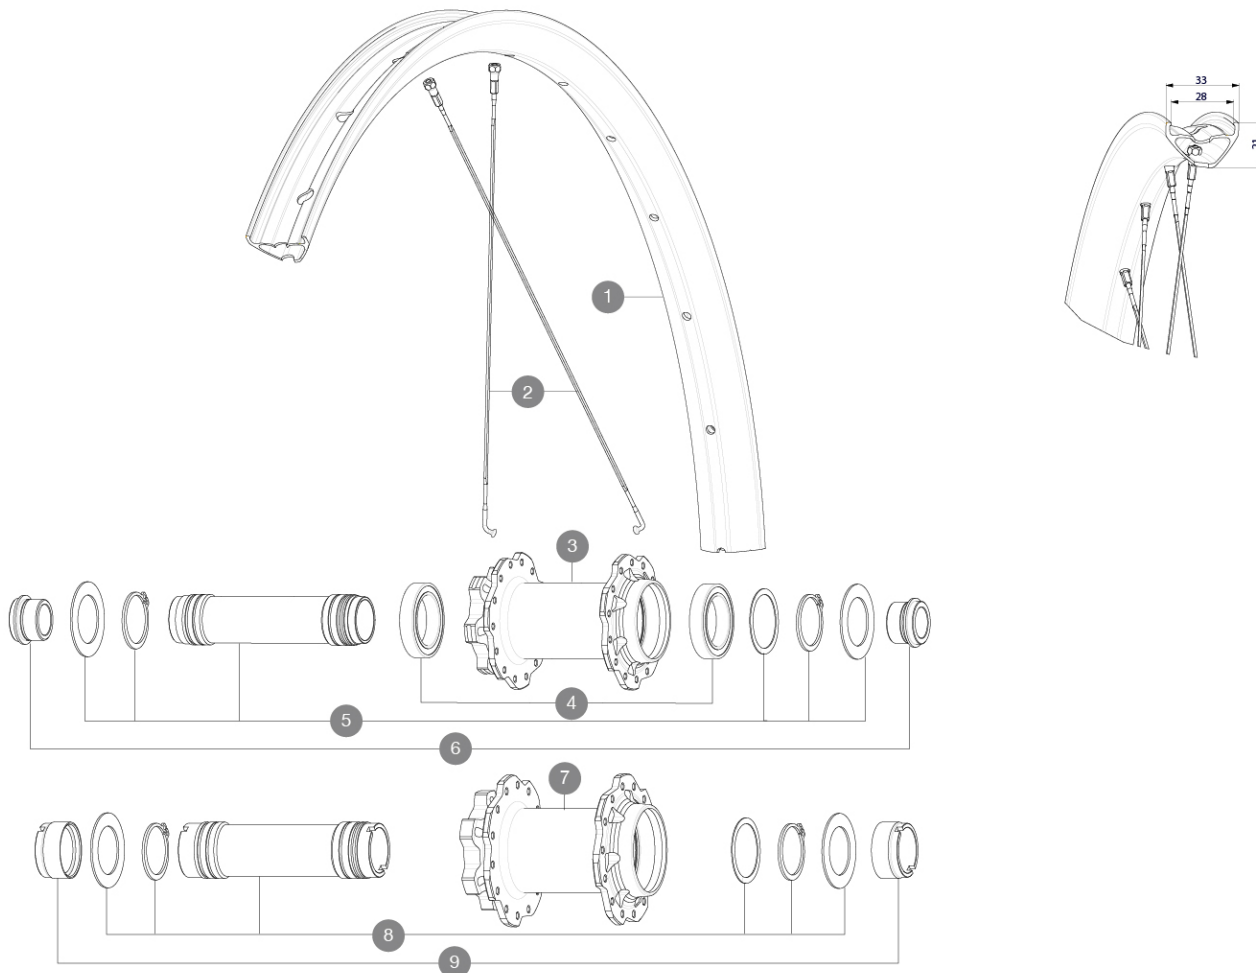

## RIMS



&NBSP;:

|   |          |                                            |
|---|----------|--------------------------------------------|
| 1 | V3766215 | Kit Front/Rear rim Deemax 21 29"           |
|   | V2640101 | UST RIM TAPE 32mm for 28 to 29mm wide rims |

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V2387901 | KIT 14 J BENT STEEL SPOKES 299mm DEEMAX DH 29" + black steel |
|---|----------|--------------------------------------------------------------|

## HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 3 | N/A      | HUB BODY                                    |
| 4 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 5 | V2373701 | KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019 |
| 7 | N/A      | HUB BODY                                    |
| 8 | V2373801 | KIT 20x110mm AXLE QRM AUTO MTB > 2019       |

## ADAPTERS

|   |          |                       |
|---|----------|-----------------------|
| 6 | 12982801 | ADAPTER Ft 20 to 15mm |
| 9 | 12982901 | ADAPTER Ft 20x110mm   |



# DEEMAX 29

2021  
FRONT

## DELIVERED WITH

|                                                                             |  |
|-----------------------------------------------------------------------------|--|
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| Pre-installed tubeless rim tape                                             |  |
| Pre-installed tubeless rim tape                                             |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| 20X110mm boost adapters delivered with front Boost wheel                    |  |
| 20X110mm NON-boost adapters delivered with NON boost front wheel            |  |
| 12X150 adapters delivered with 12X157 rear wheel                            |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |
| 20X110mm boost adapters delivered with front Boost wheel                    |  |
| 20X110mm NON-boost adapters delivered with NON boost front wheel            |  |
| 12X150 adapters delivered with 12X157 rear wheel                            |  |

## COMPATIBILITY

|                                                                               |  |
|-------------------------------------------------------------------------------|--|
| Front axle: 15x110 Boost, convertible to 20x110 Boost thru axle with adapters |  |
| Front axle: 15x110 Boost, convertible to 20x110 Boost thru axle with adapters |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                    |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                    |  |
| Boost Axles : 15X110 ; 12X148                                                 |  |
| Boost Axles : 15X110 ; 12X148                                                 |  |
| DH spacing axles: 12X150 , 12x157 , 12X157-7speed                             |  |
| DH spacing axles: 12X150 , 12x157 , 12X157-7speed                             |  |

## Specifications

### RIMS

- **Material** : Maxtal
- **Material** : Maxtal
- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum SUP
- **Drilling** : traditional
- **Drilling** : traditional
- **Internal width** : 28 mm
- **Internal width** : 28 mm
- **ETRTO size 27.5"** : 584x28TC
- **ETRTO size 29"** : 622x28TC
- **ETRTO size 29"** : 622x28TC
- **Black Shield treatment** (protects your rim against impacts and scratches)
- **Black Shield treatment** (protects your rim against

### WHEEL HUB

Instant Drive 360  
QRM Auto  
• **DH spacing axles** : 12X150 , 12x157 , 12X157-7speed available  
Hub available with 6-bolt brake rotors  
• **Axles** : Front 15X110 Boost ; Rear 12X148 Boost  
• **DH spacing axles** : 12X150 , 12x157 , 12X157-7speed available  
Hub available with 6-bolt brake rotors  
• **Axles** : Front 15X110 Boost ; Rear 12X148 Boost  
24 teeth ratchet  
Instant Drive 360  
QRM Auto

### VERSIONS

### WHEEL WEIGHTS

Weight Front 27.5": 955  
Weight Front 29": 1005