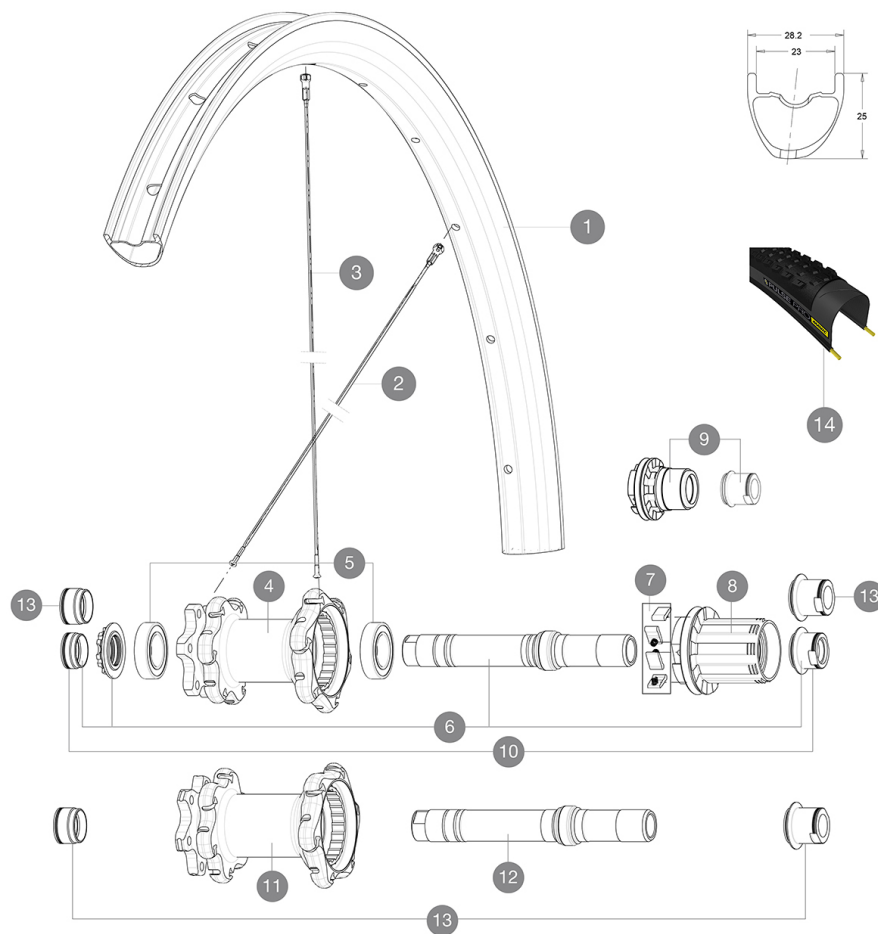


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
Recommended weight limit : 120kg  
Recommended tire sizes: 28 mm to 62 mm (1.1" to 2.5")

## REFERENCES WHEELS



## RIMS



VALVE HOLE (MM): 6,5 :

|   |          |                                          |
|---|----------|------------------------------------------|
| 1 | V3110113 | KIT REAR RIM CROSSMAX PRO CARBON 29"     |
|   | V2620101 | UST RIM TAPE 25mm (for 21-24mm wide rim) |

## SPOKES

|   |          |                                               |
|---|----------|-----------------------------------------------|
| 2 | V2384601 | KIT 12 FT/ND5 CROSSMAX PRO CARB 29" SPK 292mm |
| 3 | V2384501 | KIT 12 DS CROSSMAX PRO CARBON 29" SPK 291mm   |

## HUB SHELLS

|    |          |                                             |
|----|----------|---------------------------------------------|
| 4  | N/A      | HUB BODY                                    |
| 5  | M40076   | HUB BEARINGS 17x30x7 6903 x 2               |
| 6  | 30870401 | REAR QRM + AXLE KIT ITS4 135mm from 2012    |
| 7  | 99610601 | PAWLS KIT FOR ITS-4 (OR TS-2)               |
| 8  | 35126001 | ITS-4 FREEWHEEL BODY + SEAL 2013 (NO PAWLS) |
| 8  | 99610701 | ITS-4 FREEWHEEL SEAL                        |
| 9  | 35684101 | FREEHUB BODY XD TS2/ITS-4                   |
| 11 | N/A      | HUB BODY                                    |
| 12 | V2370801 | KIT REAR QRM+ AXLE BOOST ITS-4 148mm        |

## TYRES

|    |          |              |
|----|----------|--------------|
| 14 | 39243232 | Pulse Pro 29 |
| 14 | 39243221 | Pulse Pro 29 |




## ADAPTERS

|    |          |                                                  |
|----|----------|--------------------------------------------------|
| 10 | 30872201 | FRAME SUPPORT ITS-4 135mm REAR AXLE > 2012       |
| 13 | 30859301 | AXLE ADAPTER Rr 12x142/148mm Pro Carb MTB (Grey) |
|    | 30873101 | 2 REAR REDUCERS 12/9,5mm 2012 ITS4 HUB           |



# Crossmax Pro Carbon 29

## DELIVERED WITH

|                                                                                           |                                                                                     |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1 bottle of Mavic Sealant<br>(355 466 01)<br>1                                            |    |
| BX601 quick releases<br>(V24 503 01 frt, V24 504 01 rear)<br>1                            |    |
| Front QR adapters<br>(996 941 01 for MTB or B41 043 01 for road)<br>1                     |    |
| Rear 12x142mm adapters for ITS4 and TS2<br>(308 593 01 for ITS4, 329 650 01 for TS2)<br>1 |    |
| UST valve and accessories<br>(129 838 01)                                                 |    |
| UST valve and accessories<br>(129 838 01)                                                 |    |
| Specific disc bolts<br>(308 719 01)<br>Pack of 6                                          |    |
| Tubeless rim tape                                                                         |                                                                                     |
| Tubeless rim tape                                                                         |                                                                                     |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                      |  |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                      |  |
| User guide                                                                                |                                                                                     |
| User guide                                                                                |                                                                                     |

## COMPATIBILITY

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                       |  |
| Freewheel: Shimano/Sram, convertible to XD with optional driver body                |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters      |  |

## Specifications

### RIMS

- **Material** : 100% Unidirectional carbon fiber
- **Material** : 100% Unidirectional carbon fiber
- **Joint** : SUP
- **Drilling** : traditional
- **Drilling** : traditional
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tire** : UST Tubeless and tubetype
- **Tire** : UST Tubeless and tubetype
- **Internal width** : 23 mm
- **Internal width** : 23 mm
- **ETRTO size 27.5"** : 584x23ss
- **ETRTO size 27.5"** : 584x23ss
- **ETRTO size 29"** : 622x23ss
- **ETRTO size 29"** : 622x23ss

Hookless profile

Hookless profile

Use with Mavic Tubeless Tape

Use with Mavic Tubeless Tape

### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- Adjustable sealed cartridge bearings
- **Freewheel** : ITS-4 alloy
- **Freewheel** : ITS-4 alloy

### VERSIONS

- **Color** : Black only
- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Lefty Supermax
- Lefty Supermax

### WHEEL WEIGHTS

Wheel weight

Weight Rear 27.5": 790

Weight Rear 29": 810