

# ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT

Para una mayor duraci3n de la rueda, Mavic recomienda que el peso total soportado por las ruedas no supere los 180kg, E-bike incluida

Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")

Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre


Tamao m3ximo del neum3tico: anchura 52 mm - presi3n m3x. 2,95 bar/43 psi

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, Ebike included

## RUEDAS REFERENCIAS

F91623 E-DEEMAX S 30 INT 29 BST

F91633 E-DEEMAX S 30 CL 29 BST

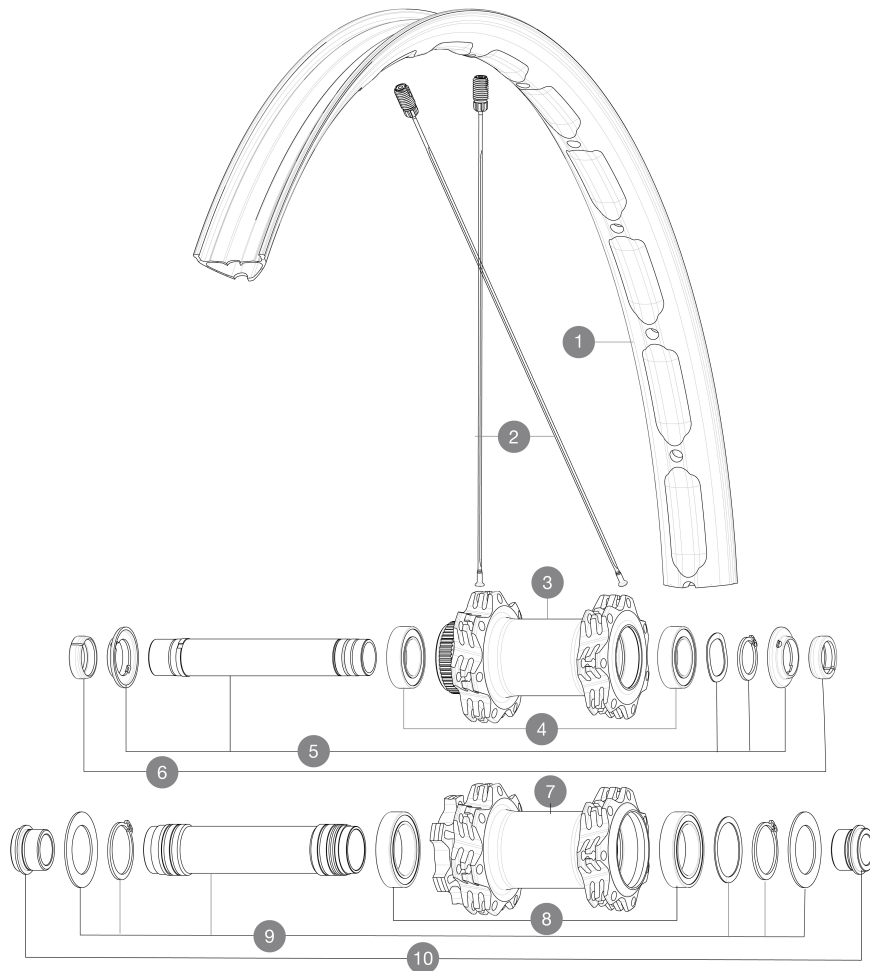

## RIMS



&amp;NBSP;

|   |          |                                        |
|---|----------|----------------------------------------|
| 1 | V3766415 | Kit Front/Rear rim eDeemax S 29        |
|   | V3750101 | 35mm UST Green Tape for 30mm wide rims |

## SPOKES

|   |          |                                                  |
|---|----------|--------------------------------------------------|
| 2 | V2388501 | Kit 14 Front eDeemax S 29" butted spoke 306 M7/7 |
|---|----------|--------------------------------------------------|

## HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 3 | N/A      | CUERPO DE BUJE                              |
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP  |
| 5 | V2375601 | Kit 110mm axle QRM auto MTB from 2019 DCL   |
| 7 | N/A      | CUERPO DE BUJE                              |
| 8 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 9 | V2373701 | KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019 |

## OPTIONS

|          |                                                       |
|----------|-------------------------------------------------------|
| V2650401 | TORQUECAP20*31 FT QRM AUTO MTB                        |
| V2374401 | TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB |

## ADAPTERS

|    |          |                                       |
|----|----------|---------------------------------------|
| 6  | V2372501 | 15mm MTB Axle Cap QRM Auto From 2019  |
| 10 | 12982801 | 15mm ADAPTER KIT - 2012 WHEELS        |
|    | V2680401 | 20x110 BOOST Front Adapter MTB wheels |
|    | 99694101 | 2 REDUCERS 15/9mm                     |

### ENTREGADO CON

|                                                                             |  |
|-----------------------------------------------------------------------------|--|
| 2 replacement spokes with each wheel                                        |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Guía del usuario                                                            |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |
| Fore adjustment wrench                                                      |  |
| Fore adjustment wrench                                                      |  |
| 2 replacement spokes with each wheel                                        |  |

### COMPATIBILITY

|                                                                                                                                 |  |
|---------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano HG9, XD or Micro Spline                                                                                      |  |
| Eje delantero: de 15Å mm, convertible a eje pasante de 20Å mm con los adaptadores incluidos                                     |  |
| Eje delantero: de 15Å mm, convertible a eje pasante de 20Å mm con los adaptadores incluidos                                     |  |
| Rear axle: 12x148 Boost thru axle                                                                                               |  |
| Eje delantero: de 15Å mm, convertible a eje pasante de 20Å mm con los adaptadores incluidos                                     |  |
| Adaptadores eje trasero: 12x148 convertible a 9x141 (kit V2510801 vendido por separado)                                         |  |
| VersiÃ³n de disco de 6Å tornillos INT de rueda delantera convertible a eje pasante 20x110 Boost mediante adaptadores opcionales |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                                                                      |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                                                                      |  |
| Rear axle: 12x148 Boost thru axle                                                                                               |  |
| Rear axle: 12x148 Boost thru axle                                                                                               |  |
| Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)                     |  |
| Eje delantero: solo para tuercas de fijaciÃ³n (incluidas), rosca M9x1                                                           |  |

### Specifications

#### LLANTAS

- **Material** : Mxtral
- **Material** : S6000 Aluminum
- **Material** : Mxtral
- **Weight reduction** : ISM

E-Bike specific rim profile

- **Material** : Mxtral
- **Material** : Mxtral
- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Tire** : UST Tubeless and tubeless

#### BUJE DE LA RUEDA

- **Material del cuerpo** : aluminio
  - **Axles** : Front 15X110 Boost ; Rear 12X148 Boost
  - **Disco estándar** : sÃ³lo 6 orificios o Center Lock
- Hub available with 6-bolt or center lock (R) brake rotors
- **Material del eje** : aluminio
  - **Tamaño del eje** : delantero 15x110 / trasero 12x148
  - **Tecnología de rueda libre** : Instant Drive 360
  - **Rueda libre** : Shimano HG MTR / Shimano MS /

#### PESOS DE RUEDAS

960