

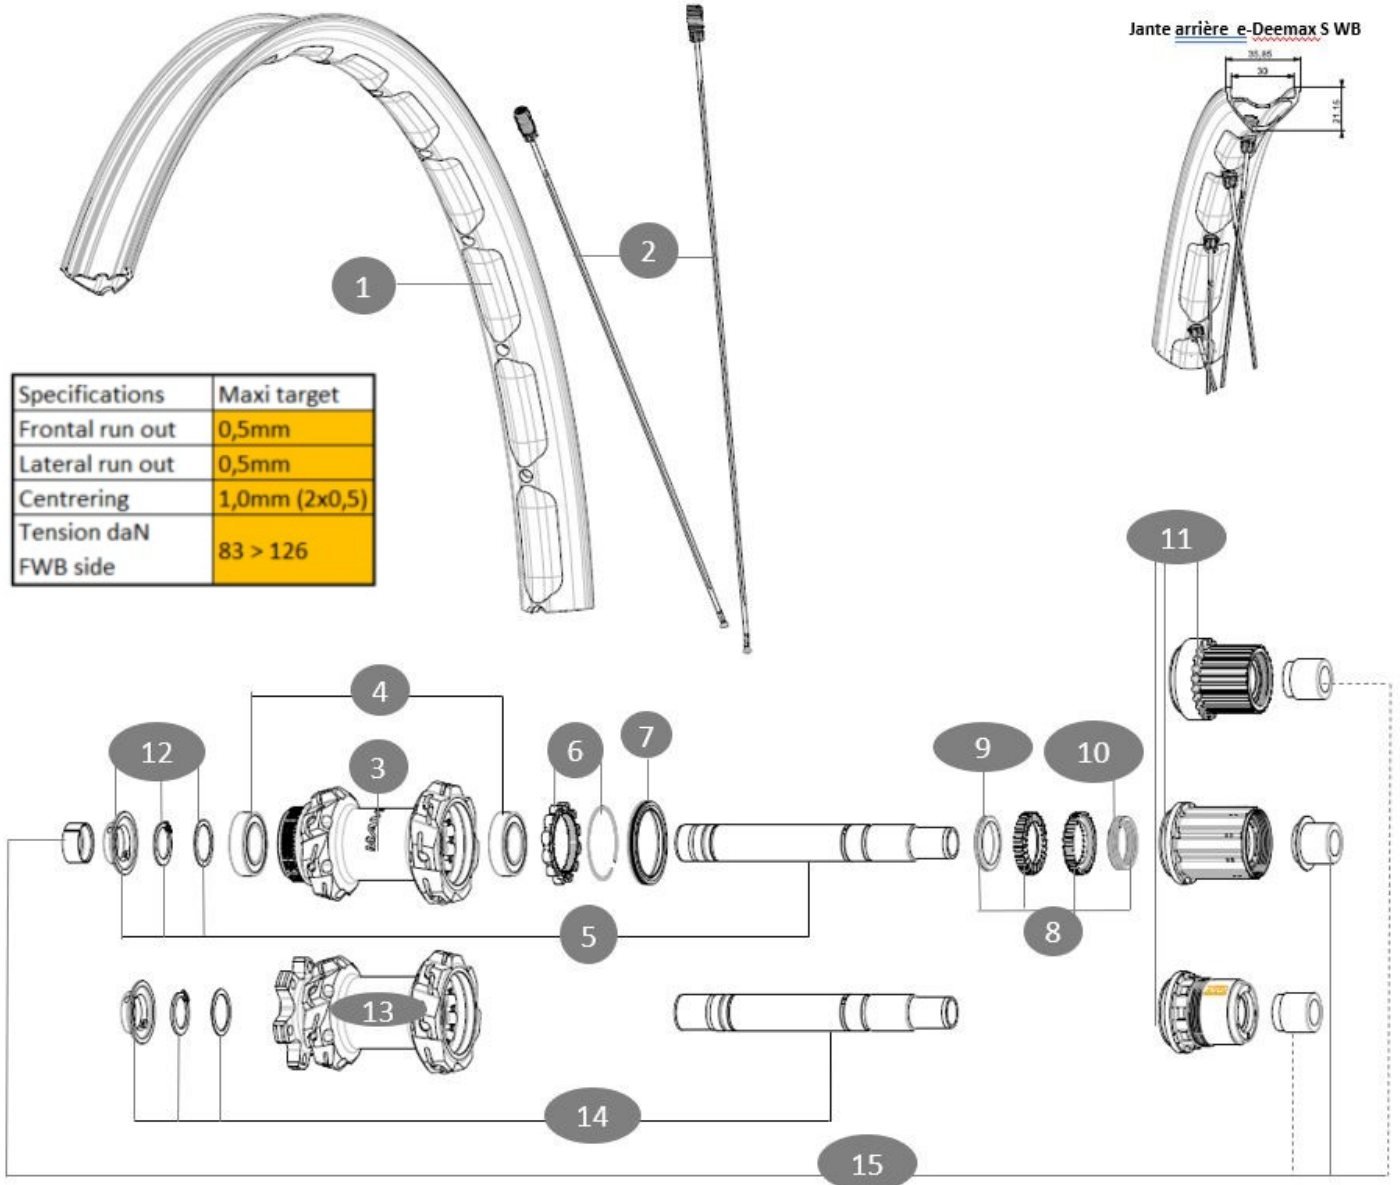
**MAVIC** **E-DEEMAX S 29**

CATEGORÍA ASTM 5: MTB CENTRADA EN DESCENSOS

Tamaño máximo del neumático: anchura 52 mm - presión máxima: 2.95 bar/43 psi

No Boost: Adaptador trasero 12 a 9A mm para cierre rápido (V2510801)

Para una mayor duración de la rueda, Mavic recomienda que el peso total soportado por las ruedas no supere los 180 kg, E-bike incluida

**RUEDAS REFERENCIAS****RIMS**

&amp;NBSP;:

1 V00100431 Kit Front/Rear rim eDeemax S30 24 29"

**SPOKES**

2 V00100831 Kit 14 steel spokes 305mm eDeemax S30 24 29"

**HUB SHELLS**

3	N/A	CUERPO DE BUJE
4	M40076	HUB BEARINGS 17x30x7 6903 x 2
5	V2375701	Kit ID360 148 DCL axle with circlip
6	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
7	V2251601	ID360 SEAL + GREASE
8	V2375201	KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific)

9	V2375401	KIT ID360 MTB 24T 3 NOISE REDUCING PADS
10	V2372901	KIT 3 ID360 MTB SPRINGS
11	V3990101	MicroSpline MTB Freewheel Body ID360
11	V3780101	HG9 Alloy MTB Freewheel Body ID360
11	V3740101	XD MTB Freewheel Body ID360
12	V2373001	KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing
14	V2372201	KIT ID360 148 D6T AXLE WITH CLIP

**ADAPTERS**

15 V2510701 ID360 EVO REAR AXLE ADAPTERS 12x142mm DCL &amp; D6T

