MAVIC DEEMAX PARK 29

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included
Minimum tyre size: width 52mm - pressure max. 2.95Bar/43PSI
Non-Boost : 12 to 9mm rear adapter for quick release ([V2510801])

REFERENCES WHEELS

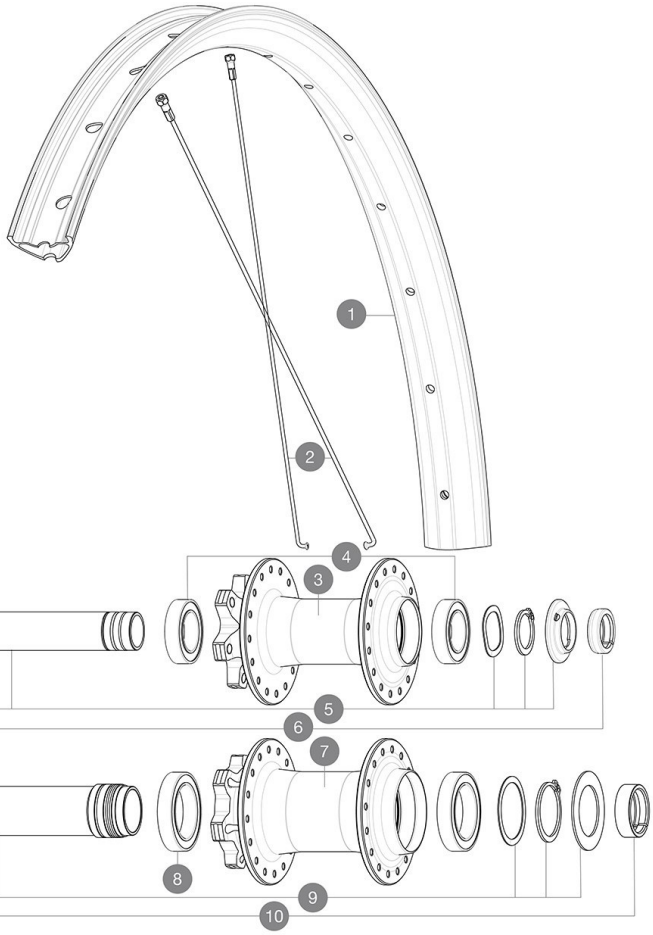



Specifications	Maxi target
Frontal run out	0,5mm
Lateral run out	0,5mm
Centrering	1,0mm (2x0,5)
Tension daN Disc side	99 > 121

RIMS

 :

1	V00096531	Kit Front/Rear rim Deemax Park 29''
	V3750101	35mm UST Green Tape for 30mm wide rims

SPOKES

2	V00062431	Kit 16 ft/rr Jbent bk rd spk 293 29''+np

HUB SHELLS

4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
8	M40179	FRONT BEARING 25x37x7 20mm AXLE
9	V2373701	KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019

ADAPTERS

6	V2372501	15mm MTB Axle Cap QRM Auto From 2019
10	V2680401	20x110 BOOST Front Adapter MTB wheels

Download date: 2024-07-16 / Update date: 2024-07-15

MAVIC DEEMAX PARK 29

DELIVERED WITH

User guide	
UST valve and accessories (129 838 01)	
Pre-installed tubeless rim tape	
User guide	
Pre-installed tubeless rim tape	
UST valve and accessories (129 838 01)	
2 replacement spokes with each wheel	
12 to 9mm rear adapter for quick release ([V2510801])	
2 replacement spokes with each wheel	

COMPATIBILITY

Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
ID360 Shimano / Sram freewheel body ([V3430101] - Delivered on the wheel)	
Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separetly)	
Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separetly)	
QRM Auto bearing preload technology QualitÃ© de Roulements Mavic Auto Our latest innovation. Those cartridge bearings are of course double sealed with C3 internal clearance. Their preload is automatically adjusted to guarantee a perfect spin with no play on the long run.	
QRM Auto bearing preload technology QualitÃ© de Roulements Mavic Auto Our latest innovation. Those cartridge bearings are of course double sealed with C3 internal clearance. Their preload is automatically adjusted to guarantee a perfect spin with no play on the long run.	
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)	
ID360 Shimano / Sram freewheel body ([V3430101] - Delivered on the wheel)	

Specifications

RIMS

- **Material :** Maxtal
- **Material :** Maxtal
- **Height :** 22 mm
- **Height :** 22 mm
- **Joint :** SUP welding technology
- **Joint :** SUP welding technology
- **Internal width :** 30 mm
- **Internal width :** 30 mm
- **Drilling :** traditional (front/rear 32 holes)
- **Drilling :** traditional (front/rear 32 holes)

Disc brake specific profile
Disc brake specific profile
Asymmetrical rim design
Asymmetrical rim design

- **ETRTO size 29" :** 622x30TC
- **ETRTO size 29" :** 622x30TC
- **Tire :** clincher
- **Tire :** clincher

SPOKES

- **Material :** steel
- **Material :** steel
- **Count :** 20 front and rear
- **Count :** 20 front and rear
- **Rear axle :** 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)

12mm front hub cap ([V2680501])

WHEEL HUB

- **Body :** aluminum
- **Body :** aluminum
- **Body design :** CLASSIC
- **Body design :** CLASSIC
- **Disc standard :** 6 Bolts only
- **Disc standard :** 6 Bolts only
- **Axle material :** aluminum
- **Axle material :** aluminum
- **Front and rear bodies :** aluminum
- **Front and rear bodies :** aluminum
- **Axles :** Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- **Axles :** Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- **Freewheel :** Shimano HG MTB / Shimano MS / Sram XD MTB
- **Freewheel :** Shimano HG MTB / Shimano MS / Sram XD MTB
- **Freewheel :** FTS-L steel
- **Freewheel :** FTS-L steel

WHEEL WEIGHTS

1185

Download date: 2024-07-16 / Update date: 2024-07-15