


ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Minimum tyre size: width 52mm - pressure max. 2.95Bar/43PSI

Non-Boost : 12 to 9mm rear adapter for quick release (IV2510801)

REFERENCES WHEELS

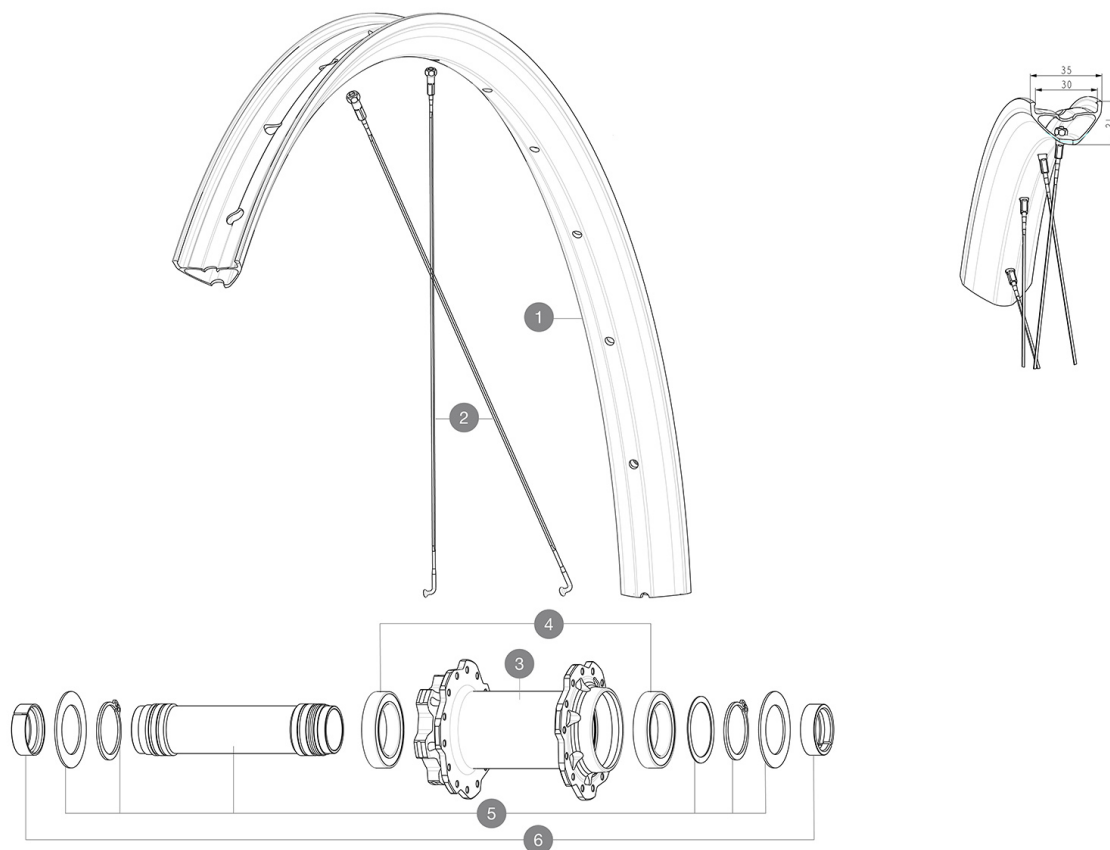

MAVIC

DEEMAX DH YLW 27.5

DELIVERED WITH

User guide	
UST valve and accessories (129 838 01)	
Pre-installed tubeless rim tape	
User guide	
Pre-installed tubeless rim tape	
UST valve and accessories (129 838 01)	
Specific disc bolts	
Specific disc bolts	
12 to 9mm rear adapter for quick release ([V2510801])	

COMPATIBILITY

Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)	
Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
ID360 Shimano / Sram freewheel body ([V3430101] - Delivered on the wheel)	
Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)	
Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)	
Instant Drive 360 freewheel technology The new Instant Drive 360 freewheel system is super light and fast to engage with only 9Â°. A large contactless rubber seal provides low friction, while a wide array of end caps makes it super versatile.	
ID360 Shimano / Sram freewheel body ([V3430101] - Delivered on the wheel)	

Specifications

RIMS

- Material : Mactal
- Material : Mactal
- Height : 22 mm
- Height : 22 mm
- Joint : SUP welding technology
- Joint : SUP welding technology
- Internal width : 30 mm
- Internal width : 30 mm
- Drilling : traditional (front/rear 28 holes)
- Drilling : traditional (front/rear 28 holes)

Disc brake specific profile

Disc brake specific profile

Asymmetrical rim design

Asymmetrical rim design

- ETRTO size 27.5" : 584x30TC

- ETRTO size 27.5" : 584x30TC

- Tire : clincher

- Tire : clincher

SPOKES

- Material : steel
- Material : steel
- Lacing : front radial, rear crossed 2, contactless
- Lacing : front radial, rear crossed 2, contactless

Instant Drive 360 freewheel technology

Isopulse lacing design

Isopulse lacing design

WHEEL HUB

- Body : aluminum
- Body : aluminum
- Disc standard : 6 Bolts only
- Disc standard : 6 Bolts only
- Axle material : aluminum
- Axle material : aluminum
- Axle size : rear 12x148 or 12x157
- Axle size : rear 12x148 or 12x157
- Axles : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- Axles : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- Front : Quick release, 12x100 and 15x100 through axle compatible
- Front : Quick release, 12x100 and 15x100 through axle compatible
- Freewheel : FTS-L steel
- Freewheel : FTS-L steel

WHEEL WEIGHTS