



MAVIC E-DEEMAX S 27.5

1
2024
FRONT

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT
Minimum tyre size: width 52mm - pressure max. 2.95Bar/43PSI
Non-Boost : 12 to 9mm rear adapter for quick release (V2510801))
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

REFERENCES WHEELS

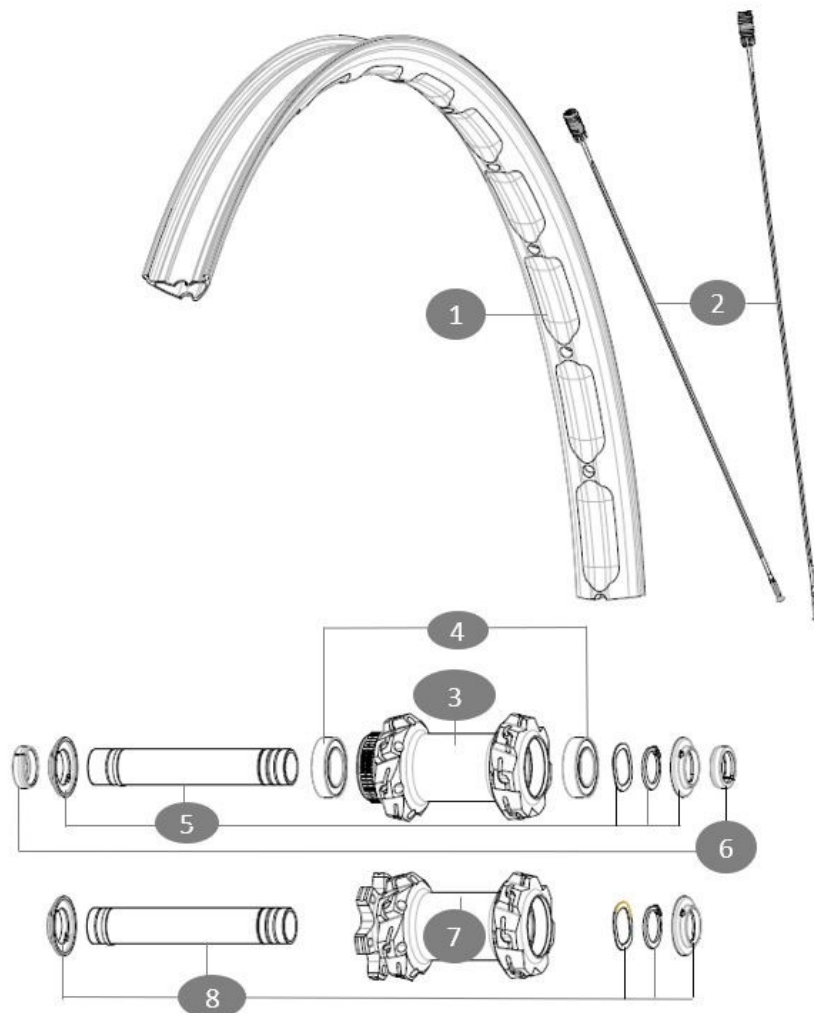

Jante avant e-Deemax S WB

Specifications	Maxi target
Frontal run out	0,5mm
Lateral run out	0,5mm
Centrerig	1,0mm (2x0,5)
Tension daN	81 > 107
Disc side	

RIMS



&NBSP;:

1 V00100531 Kit Front/Rear rim eDeemax S30 24 27,5"

SPOKES

2 V00100931 Kit 14 steel spokes 286mm eDeemax S30 24 27,5"

HUB SHELLS

3	N/A	HUB BODY
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL
7	N/A	HUB BODY
8	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019

ADAPTERS

6 V2372501 15mm MTB Axle Cap QRM Auto From 2019



E-DEEMAX S 27.5

DELIVERED WITH

User guide	
UST valve and accessories (129 838 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
User guide	
UST valve and accessories (129 838 01)	
2 replacement spokes with each wheel	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
2 replacement spokes with each wheel	

COMPATIBILITY

Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Boost 20 to 15mm front adapter ([12982801]	
Front axle: for fixing nuts only (included), M9x1 thread	
Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)	
Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)	
Front axle: for fixing nuts only (included), M9x1 thread	

Specifications

RIMS

- Material : Mxtal
- Material : Mxtal
- Height : 22 mm
- Height : 22 mm
- Joint : SUP welding technology
- Joint : SUP welding technology
- Internal width : 30 mm
- Internal width : 30 mm
- Drilling : Fore tapeless tubeless technology (front/rear 28 holes)
- Drilling : Fore tapeless tubeless technology (front/rear 28 holes)
- Disc brake specific profile
- Disc brake specific profile
- Asymmetrical rim design
- Asymmetrical rim design
- ETRTO size : 584x30TC
- ETRTO size 29" : 622x30TC
- Tire : UST Tubeless and tubetype
- Tire : UST Tubeless and tubetype

SPOKES

- Material : steel
- Material : steel
- Shape : straight pull, round
- Shape : straight pull, round
- Lacing : front and rear crossed 3
- Lacing : front and rear crossed 3
- Front axle : convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)
- Boost : Torque Caps ([V2650401])
- 12mm front hub cap ([V2680501])

WHEEL HUB

- Body : aluminum
- Body : aluminum
- Body design : INFINITY
- Body design : INFINITY
- Disc standard : 6 Bolts or Center Lock®
- Disc standard : 6 Bolts or Center Lock®
- Axle material : aluminum
- Axle material : aluminum
- Rear body : aluminum
- Rear body : aluminum
- Axles : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- Axles : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- Rear : Quick Release, 12x142 and 12x135 compatible
- Rear : Quick Release, 12x142 and 12x135 compatible
- Freewheel : FTS-L steel
- Freewheel : FTS-L steel

WHEEL WEIGHTS

890