# MAVIC Ksyrium Pro SL

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
Recommended weight limit : 120kg
Recommended tyre sizes: 23 to 32 mm
Max. Pressure: 23mm 8.7 bars - 125 psi, 25mm 7.7 bars - 110 psi

## REFERENCES WHEELS

| | |
|---|---|
| F51401 | Ksyrium Pro SL C Ft |

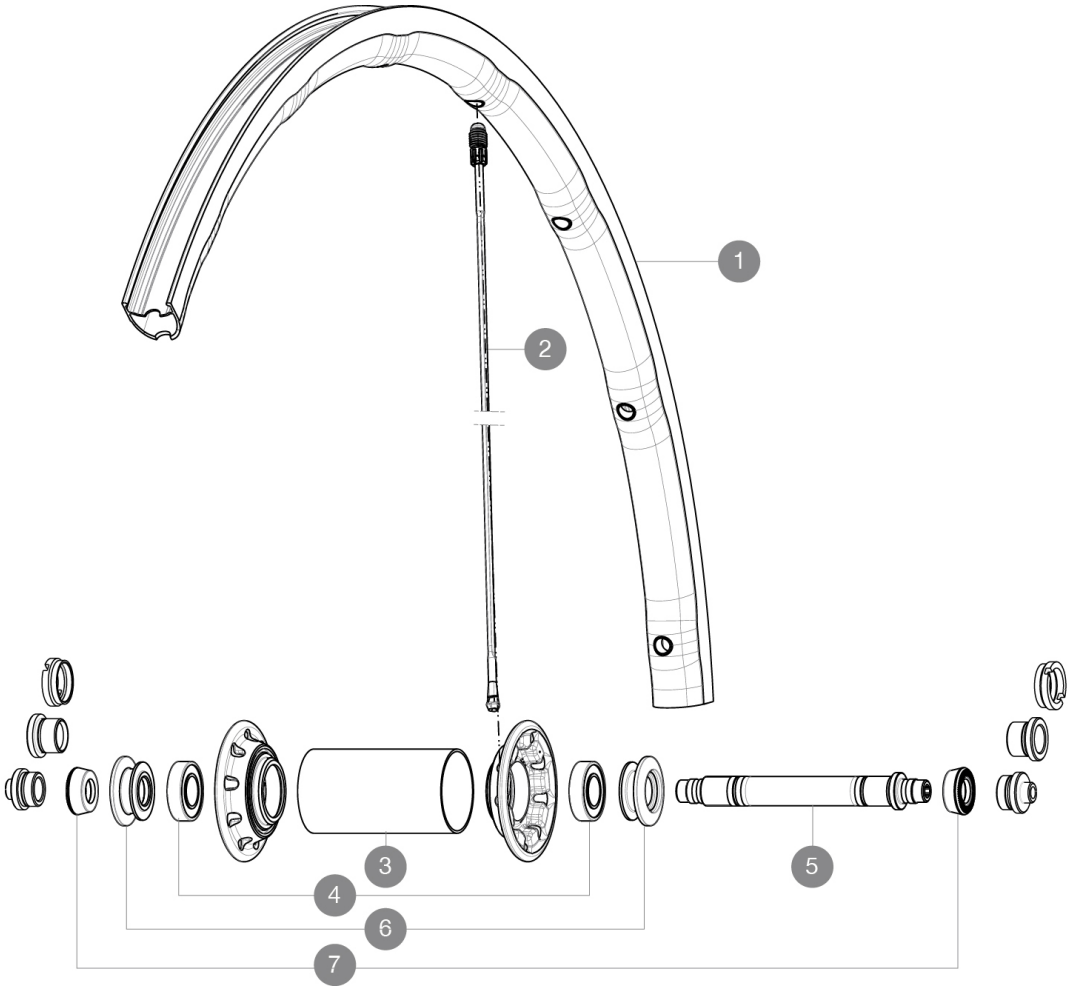





## RIMS

**VALVE HOLE Ã (MM): 6,5 :**

| | | |
|---|---|---|
| *1* | V2401810 | KIT FRONT RIM KSYRIUM PRO SL CLINCHER |

## SPOKES

| | | |
|---|---|---|
| *2* | V2276901 | KIT 2 FT 282.5 & RR 273.5 STAMPED SPOKE KSYRIUM PRO - while |
| *2* | V2270601 | KIT 9 FT KSY SLR/K125/PRO EXA SPK 282,5mm |

## HUB SHELLS

| | | |
|---|---|---|
| *3* | N/A | HUB BODY |
| *4* | M40078 | FRONT HUB BEARINGS 6901 x 2 |
| *5* | 32999801 | FRONT AXLE KIT R-SYS/KSYRIUM SL/SLS 2013 |
| *6* | M40759 | ADJUSTING BEARING NUT + FRONT CAP |

## ADAPTERS

| | | |
|---|---|---|
| *7* | 35117301 | FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T |

Download date: 2024-07-16 / Update date: 2022-03-01

# MAVIC Ksyrium Pro SL

2016
FRONT

## DELIVERED WITH

| | |
|---|---|
| BR601 quick releases | |
| BR601 quick releases | |
| Multifonction adjustment wrench | |
| User guide | |
| Multifonction adjustment wrench | |
| User guide | |

## COMPATIBILITY

| | |
|---|---|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body | |
| Front axle: Quick Release only | |
| Rear axle: Quick Release only | |

## Specifications

### RIMS

- **Material :** Maxtal
- **Height :** front 24mm, rear 26 asymmetrical
- **Joint :** SUP
- **Drilling :** Fore
- **Brake track :** UB Control
- **Weight reduction :** ISM 4D
- **Valve hole diameter :** 6.5 mm
- **Tyre :** clincher
- **Material :** Maxtal
- **Height :** front 24mm, rear 26 asymmetrical
- **ETRTO size :** 622x15C
- **Recommended tyre sizes :** 23 to 32 mm
- **Joint :** SUP
- **Drilling :** Fore
- **Brake track :** UB Control
- **Weight reduction :** ISM 4D
- **Valve hole diameter :** 6.5 mm
- **Tyre :** clincher
- **Internal width :** 15mm
- **ETRTO size :** 622x15C

### SPOKES

- **Material :** Zicral
- **Shape :** straight pull, bladed, front double butted
- **Nipples :** Fore integrated aluminum
- **Material :** Zicral
- **Count :** front 18, rear 20
- **Lacing :** front radial, rear Isopulse
- **Shape :** straight pull, bladed, front double butted
- **Nipples :** Fore integrated aluminum
- **Count :** front 18, rear 20
- **Lacing :** front radial, rear Isopulse

### WHEEL HUB

- **Front body :** carbon with aluminum flanges
- **Rear body :** aluminum
- **Rear body :** aluminum
- **Axle material :** aluminum
- **Front body :** carbon with aluminum flanges

Adjustable sealed cartridge bearings

- **Freewheel :** FTS-L steel
- **Axle material :** aluminum

Adjustable sealed cartridge bearings

- **Freewheel :** FTS-L steel

### VERSIONS

- **Color :** Black only

### WHEEL WEIGHTS

Wheel weight 600

Download date: 2024-07-16 / Update date: 2022-03-01