


ASTM CATEGORY 1 : road only  
Recommended weight limit : 120kg  
Recommended tire sizes: 23 to 32 mm  
Max. Pressure: 23mm 8.7 bars - 125 psi, 25mm 7.7 bars - 110 psi

## REFERENCES WHEELS

F27302 CXR Elite Ft

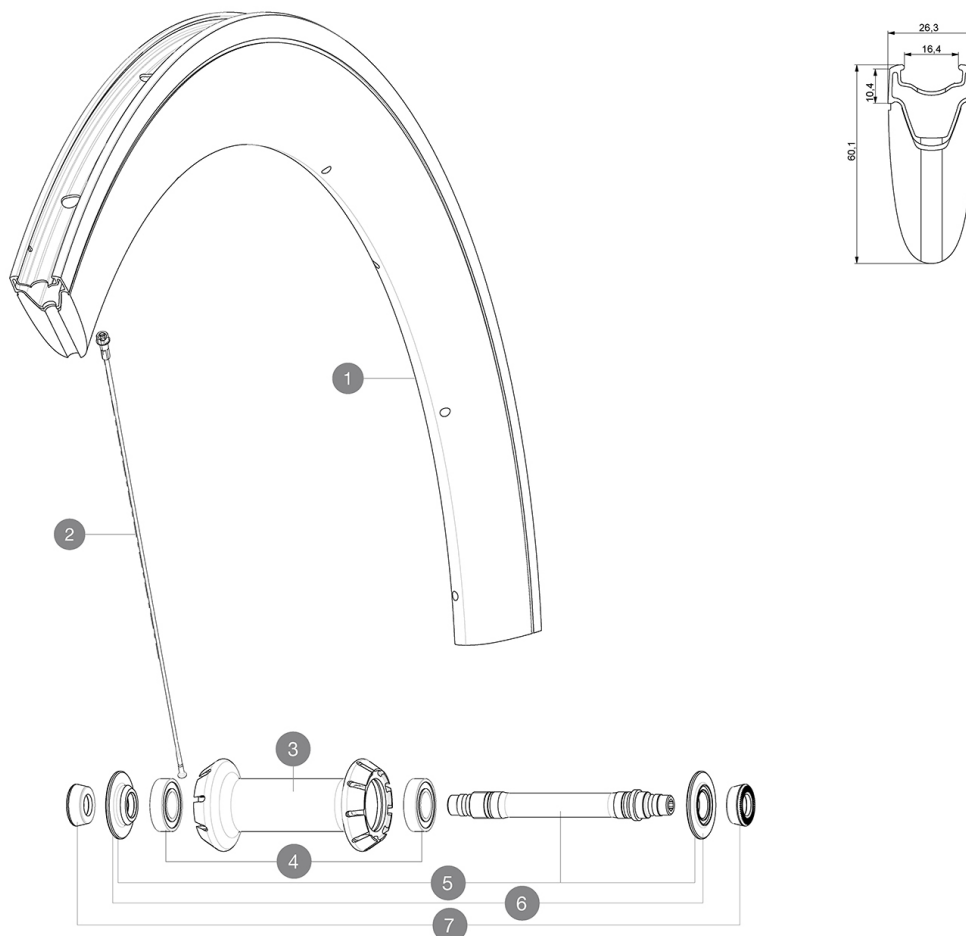

## RIMS



VALVE HOLE  $\varnothing$  (MM): 6.5 :

|   |          |                                               |
|---|----------|-----------------------------------------------|
| 1 | V2408110 | KIT FRONT RIM CXR ELITE UB - until stock last |
|   | V2690201 | KIT CARBON RIM TAPE 18x622mm - FOR CARBON RIM |

## SPOKES

|   |          |                                                     |
|---|----------|-----------------------------------------------------|
| 2 | V2275001 | KIT 9 FT BTD AERO SPOKE 283mm/WIDE NIPPLE CXR Elite |
|---|----------|-----------------------------------------------------|

## HUB SHELLS

|   |          |                                         |
|---|----------|-----------------------------------------|
| 3 | N/A      | HUB BODY                                |
| 3 | N/A      | HUB BODY                                |
| 4 | M40078   | FRONT HUB BEARINGS 6901 x 2             |
| 5 | 30870001 | FRONT AXLE ROAD RIM BRAKING QRM +       |
| 6 | V2252501 | FRONT SETTING NUT & DUST PROTECTOR MY16 |

## ADAPTERS

|   |          |                                                         |
|---|----------|---------------------------------------------------------|
| 7 | 35117301 | FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T |
|---|----------|---------------------------------------------------------|



# CXR Elite

DELIVERED WITH

|                                                                |  |
|----------------------------------------------------------------|--|
| BR601 quick releases<br>(V24 501 01 frt, V24 502 01 rear)<br>1 |  |
| Valve extender<br>(118 952 01)<br>1                            |  |
| Rim tape                                                       |  |
| Multifunction adjustment wrench<br>(325 423 01)<br>1           |  |
| User guide                                                     |  |

COMPATIBILITY

|                                                                                         |  |
|-----------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies |  |
| Front axle: Quick Release only                                                          |  |
| Rear axle: Quick Release only                                                           |  |

Specifications

RIMS

- **Material** : Maxtal alloy with Blackcell flange
- **Height** : 60 mm
- **Drilling** : traditional
- **Brake track** : UB Control
- **Valve hole diameter** : 6.5 mm
- **Tire** : clincher
- **Internal width** : 16 mm
- **ETRTO size** : 622x16C

SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Nipples** : aluminum, ABS
- **Count** : front 18, rear 24
- **Lacing** : front radial, rear Isopulse

WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Sealed cartridge bearings
- **Freewheel** : Instant Drive 360

WHEEL WEIGHTS

Wheel weight 895