MAVIC Crossmax Pro 29

ASTM CATEGORY 3 : offroad with jumps less than 61cm
Recommended weight limit : 120kg
Recommended tire sizes: 28 mm to 62 mm (1.1" to 2.5")

REFERENCES WHEELS

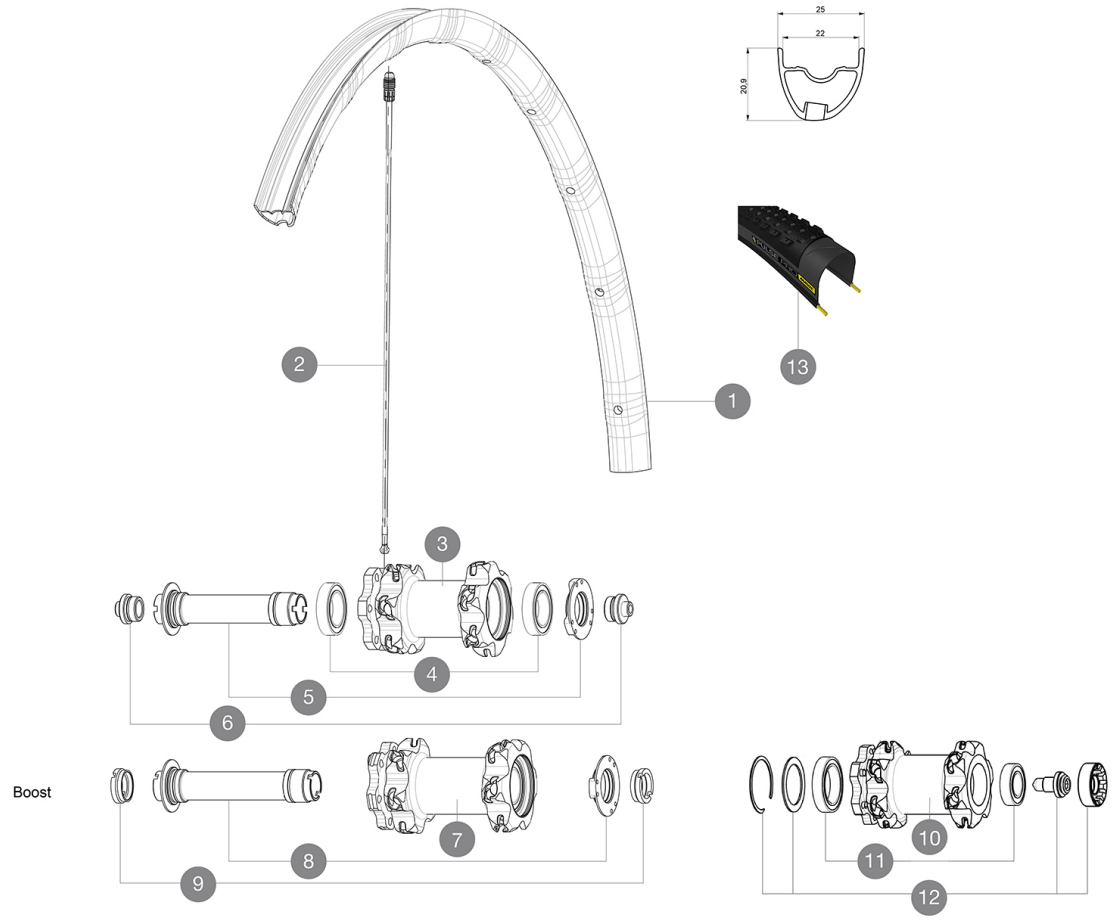

RIMS

Ã VALVE HOLE (MM): 6,5 :

1	V2316210	KIT FRONT RIM CROSSMAX PRO 29'' 22mm TSS

SPOKES

2	V2386401	KIT 1 275mm 27,5'' + 1 293mm 29'' CROSSMAX PRO STAMPED BUTTE
2	V2384801	KIT 12 FT/NDS CROSSMAX PRO 29'' AL SPK 293mm

HUB SHELLS

3	N/A	HUB BODY
4	99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804
5	V2252301	KIT MY16 FRONT AXLE ROAD DISC 9/12/15 INT
7	N/A	HUB BODY
8	V2370701	KIT FRONT QRM+ AXLE BOOST INTL 110mm
10	N/A	HUB BODY
11	M40771	BEARING KIT FOR LEFTY 50 & 60 HUB
12	36709301	ASSEMBLY KIT FOR LEFTY SUPERMAX WHEELS

OPTIONS

	V2650201	ADAPTER Front Torque Cap 15x31 MTB QRM +

TYRES

13	39243232	Pulse Pro 29
13	39243221	Pulse Pro 29

ADAPTERS

6	B4104301	ADAPTER Ft 9mm QR QRM+
9	B4104401	ADAPTER Ft 15mm QRM+

Download date: 2024-07-16 / Update date: 2022-05-31

MAVIC Crossmax Pro 29

2017
FRONT

DELIVERED WITH

1 bottle of Mavic Sealant (355 466 01) 1	
BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Multifonction adjustment wrench (325 423 01) 1	
Multifonction adjustment wrench (325 423 01) 1	
User guide	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

Specifications

RIMS

- **Material :** Maxtal
- **Material :** Maxtal
- **Joint :** SUP
- **Joint :** SUP
- **Drilling :** Fore
- **Drilling :** Fore
- **Weight reduction :** ISM 4D
- **Weight reduction :** ISM 4D
- **Valve hole diameter :** 6.5 mm
- **Valve hole diameter :** 6.5 mm
- **Tire :** UST Tubeless and tubetype
- **Tire :** UST Tubeless and tubetype
- **Internal width :** 22 mm
- **Internal width :** 22 mm
- **ETRTO size 27.5" :** 584x22ss
- **ETRTO size 27.5" :** 584x22ss
- **ETRTO size 29" :** 622x22ss
- **ETRTO size 29" :** 622x22ss

Hookless profile
Hookless profile

SPOKES

- **Material :** Zicral
- **Material :** Zicral
- **Shape :** straight pull, bladed, double butted
- **Shape :** straight pull, bladed, double butted
- **Count :** 24 front and rear
- **Count :** 24 front and rear
- **Lacing :** front crossed 2, rear lsopulse
- **Lacing :** front crossed 2, rear lsopulse

WHEEL HUB

- **Rear body :** aluminum
- **Rear body :** aluminum
- **Front body :** carbon with aluminum flanges
- **Front body :** carbon with aluminum flanges
- **Axle material :** aluminum
- **Axle material :** aluminum

Sealed cartridge bearings
Sealed cartridge bearings

- **Freewheel :** ITS-4 alloy
- **Freewheel :** ITS-4 alloy

VERSIONS

- **Color :** Black only
- **Color :** Black only
- **Disc standard :** 6 Bolts only
- **Disc standard :** 6 Bolts only
- **Hub width :** Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- **Hub width :** Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

Lefty Supermax
Lefty Supermax

WHEEL WEIGHTS

Wheel weight
Weight Front 27.5": 700
Weight Front 29": 730

Download date: 2024-07-16 / Update date: 2022-05-31