


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
Recommended weight limit : 120kg

## REFERENCES WHEELS

|        |                              |        |                            |
|--------|------------------------------|--------|----------------------------|
| R68801 | XmaxSLPro27.5OffsetRrWTSBk   | R78402 | XmaxSLProLtd27.5RxD WTS YE |
| R68802 | XmaxSLProLtd27.5OffsetWTSYel | R51702 | XmaxSLProLtd27.5RrWTSYel   |
| R75201 | XmSLProLtd27.5OffsetNT135    | R51701 | XmaxSLPro27.5RrWTS Black   |
| R78401 | XmaxSLPro27.5RrXD WTS BK     | R82601 | XmaxSLPro27.5RrNT Bk       |

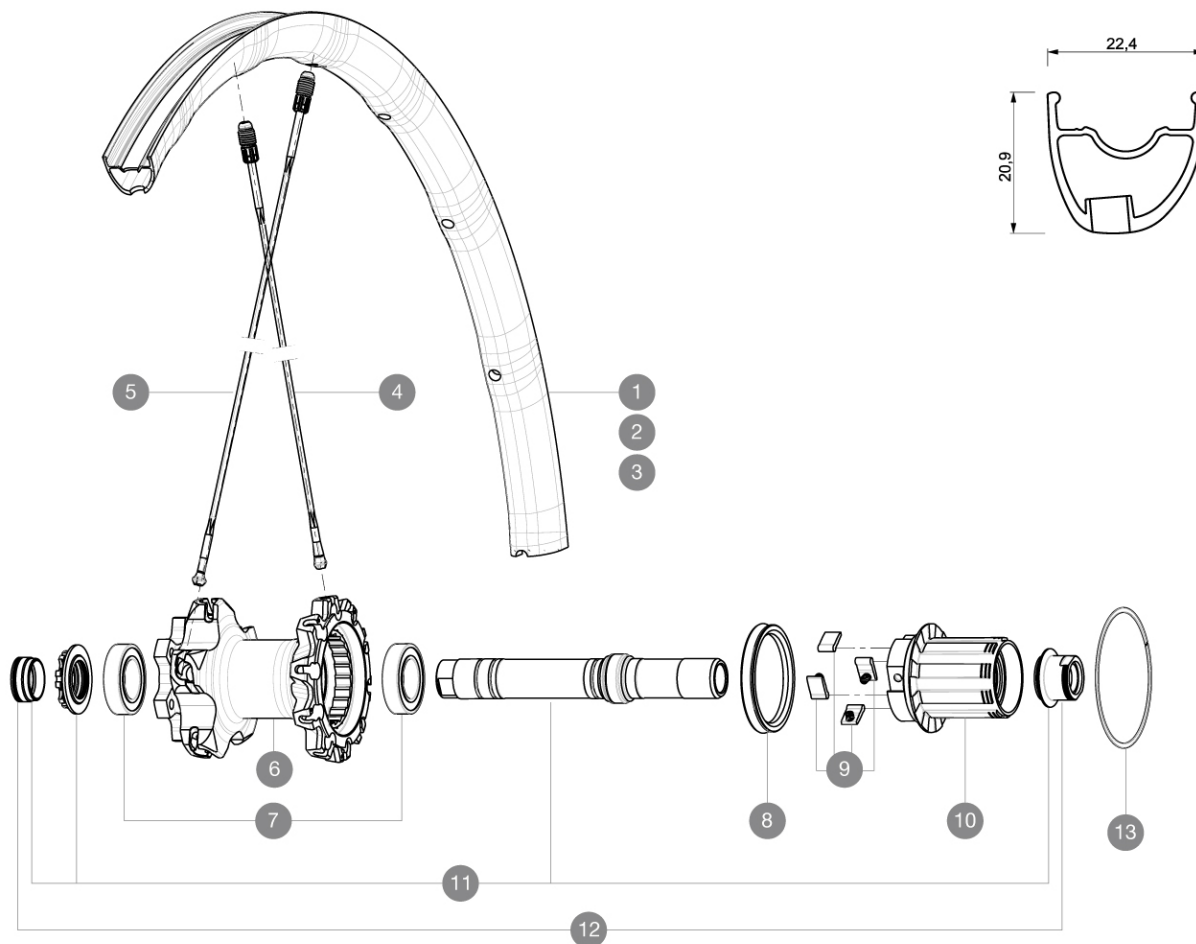

## RIMS



VALVE HOLE (MM): 6,5 :

|   |          |                                                 |
|---|----------|-------------------------------------------------|
| 1 | V2313213 | "KIT RR RIM CROSSMAX SL PRO LTD OFFS YEL 27,5"" |
| 2 | V2313113 | "KIT REAR RIM CROSSMAX SL PRO LTD YELL 27,5""   |
| 3 | V2310513 | KIT REAR RIM CROSSMAX SL/SL PRO BLACK 27,5"     |

## SPOKES

|   |          |                                                            |
|---|----------|------------------------------------------------------------|
| 4 | 36675101 | "KIT 10 DS XMAX SLR/END/PRO/DEEMAX PRO 27,5"" SPK 251,5mm" |
| 5 | 36675001 | "KIT 10 NDS XMAX SLR/ENDURO 27,5"" ALU SPK 281,5mm"        |

## HUB SHELLS

|    |          |                                             |
|----|----------|---------------------------------------------|
| 6  | N/A      | HUB BODY                                    |
| 7  | M40076   | HUB BEARINGS 17x30x7 6903 x 2               |
| 8  | 99610701 | ITS-4 FREEWHEEL SEAL                        |
| 9  | 99610601 | PAWLS KIT FOR ITS-4 (OR TS-2)               |
| 10 | 35126001 | ITS-4 FREEWHEEL BODY + SEAL 2013 (NO PAWLS) |
| 11 | 30870401 | REAR QRM + AXLE KIT ITS4 135mm from 2012    |
| 13 | 30871801 | ELASTIC RING 56mm diam. ITS-4 20 SPOKES     |

## ADAPTERS

|    |          |                                            |
|----|----------|--------------------------------------------|
| 12 | 30872201 | FRAME SUPPORT ITS-4 135mm REAR AXLE > 2012 |
|----|----------|--------------------------------------------|



# Crossmax SL Pro WTS 27.5

## DELIVERED WITH

|                                 |  |
|---------------------------------|--|
| BX601 quick releases            |  |
| 1 bottle of Mavic Sealant       |  |
| UST valve and accessories       |  |
| Front QR adapters               |  |
| Rear QR adapters                |  |
| Rear 12x142mm adapters          |  |
| Multifonction adjustment wrench |  |

## Specifications

### RIMS

- **Material** : Maxtal
  - **Joint** : SUP
  - **Drilling** : Fore
- Disc brake specific profile
- **Weight reduction** : ISM 4D
  - **Valve hole diameter** : 6.5 mm
  - **Tyre** : UST Tubeless and tubetype
  - **Internal width** : 19 mm
  - **ETRTO size 26"** : 559x19C
  - **ETRTO size 650b/27.5"** : 584x19C
  - **ETRTO size 29"** : 622x19C
  - **ETRTO recommended tyre sizes** : 28mm to 62mm (1.1" to 2.5")

### SPOKES

- **Material** : Zicral
- **Shape** : straight pull, bladed
- **Nipples** : Fore integrated aluminum
- **Count** : 20 front and rear
- **Lacing** : front crossed 2, rear Isopulse

### WHEEL HUB

- **Front body** : carbon with aluminum flanges
- Adjustable sealed cartridge bearings
- **Freewheel** : ITS-4 alloy
- Shimano 11 speeds compatible  
Sram XD Compatible (XX1-X01) with optionnal kit

### WHEEL WEIGHTS

Wheel weight  
Weight Rear 26": 760  
Weight Rear 27.5": 805  
Weight Rear 29": 830