

MAVIC E-CROSSMAX XLR 29

2024
REAR

ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Minimum tyre size: width 52mm - pressure max. 2.35Bar/34PSI

Non-Boost : 15 to 9mm front adapter for quick release ((99694101))

REFERENCES WHEELS

Jante arrière E-Crosstrail Carbone SL

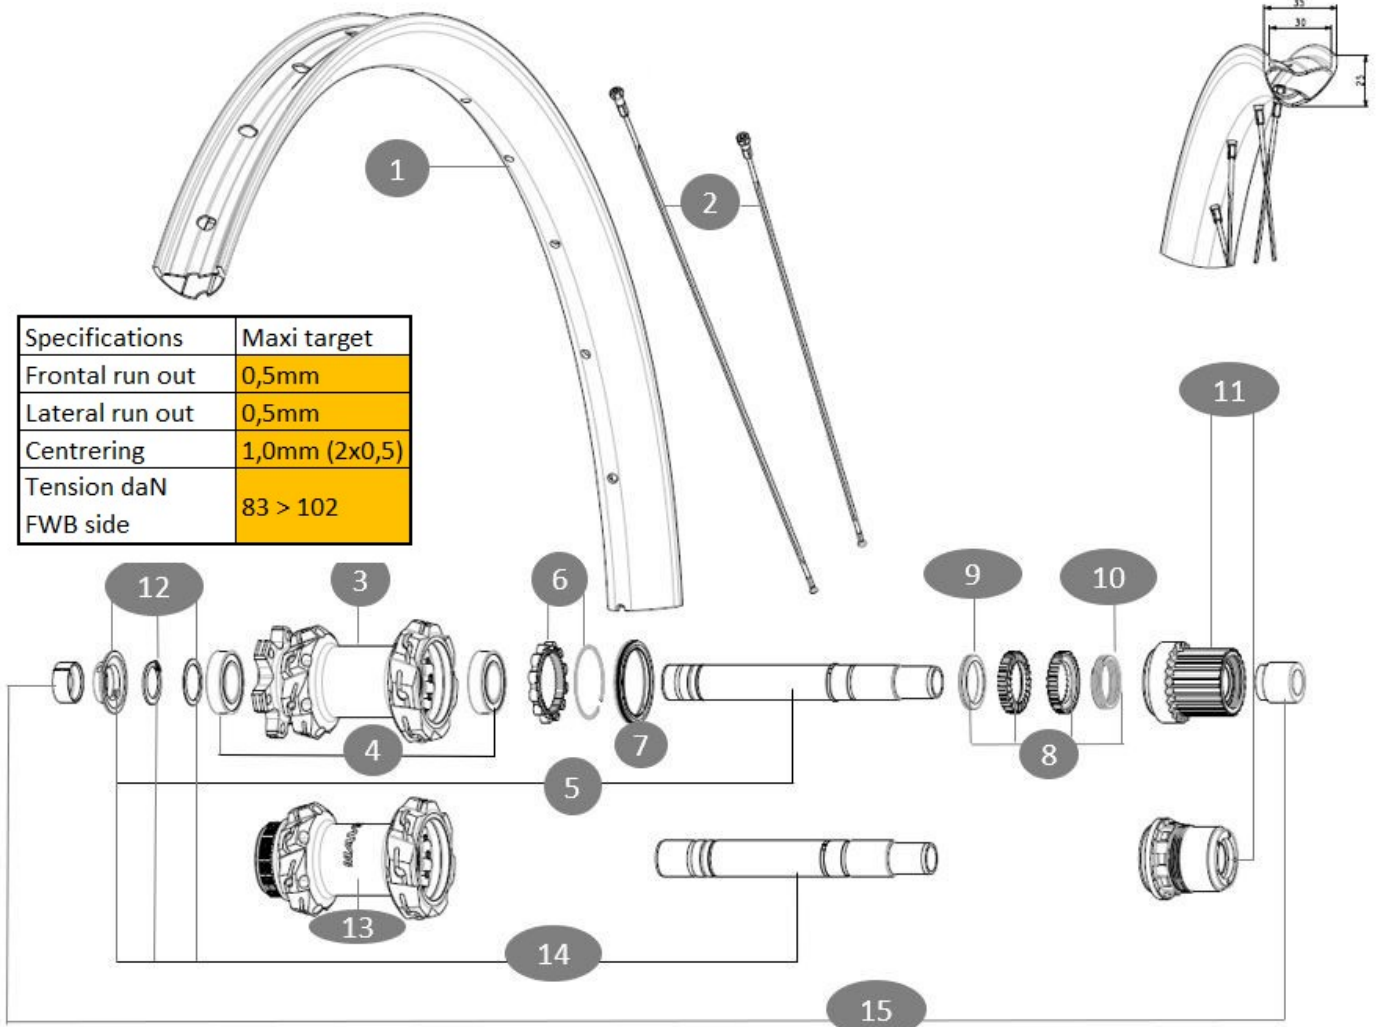

RIMS



&NBSP;:

1 V00101631 KIT FT/RR RIM E XTRAIL SL CARB

SPOKES

2 V00101831 KIT 14 SPK 298 EXTRAIL SL CARB

HUB SHELLS

| | | |
|----|----------|--|
| 3 | N/A | HUB BODY |
| 4 | M40076 | HUB BEARINGS 17x30x7 6903 x 2 |
| 5 | V2372201 | KIT ID360 148 D6T AXLE WITH CLIP |
| 6 | V2252701 | KIT ID360 INSERT SHAPED EAR LOBE > 2017 |
| 7 | V2251601 | KIT ID360 SEAL + GREASE |
| 8 | V2375201 | KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific) |
| 9 | V2375401 | KIT ID360 MTB 24T 3 NOISE REDUCING PADS |
| 10 | V2372901 | KIT 3 ID360 MTB SPRINGS |
| 11 | V3990101 | MicroSpline MTB Freewheel Body ID360 |

| | | |
|----|----------|---|
| 11 | V3740101 | XD MTB Freewheel Body ID360 |
| 12 | V2373001 | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing |
| 13 | N/A | HUB BODY |
| 14 | V2375701 | Kit ID360 148 DCL axle with circlip |

OPTIONS

V2372801 KIT ID360 2x40 TEETH RATCHETS + MTB SPRING + GREASE + PAD

ADAPTERS

15 V2510701 ID360V2RrAxleAdapt12x142/148

MAVIC E-CROSSMAX XLR 29

DELIVERED WITH

| | |
|--|--|
| User guide | |
| UST valve and accessories (129 838 01) | |
| Pre-installed tubeless rim tape | |
| User guide | |
| Pre-installed tubeless rim tape | |
| UST valve and accessories (129 838 01) | |
| 2 replacement spokes with each wheel | |
| 12 to 9mm rear adapter for quick release (V2510801) | |
| 2 replacement spokes with each wheel | |

COMPATIBILITY

| | |
|---|--|
| Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately) | |
| Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately) | |
| Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately) | |
| Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately) | |
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately) | |
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately) | |
| Instant Drive 360 freewheel technology The new Instant Drive 360 freewheel system is super light and fast to engage with only 9Â°. A large contactless rubber seal provides low friction, while a wide array of end caps makes it super versatile. | |

Specifications

RIMS

- **Material** : 100% carbon fiber with UDÂ² external layer
- **Material** : 100% carbon fiber with UDÂ² external layer
- **Height** : 25 mm
- **Height** : 25 mm
- **Internal width** : 30 mm
- **Internal width** : 30 mm
- **Drilling** : traditional (front/rear 28 holes)
- **Drilling** : traditional (front/rear 28 holes)

Disc brake specific profile

Disc brake specific profile

E-Bike specific rim profile

E-Bike specific rim profile

- **ETRTO size 29"** : 622x30TSS

- **ETRTO size 29"** : 622x30TSS

- **Tire** : clincher

- **Tire** : clincher

SPOKES

- **Material** : steel

- **Material** : steel

- **Shape** : j-bent, round, 2.0 straight gauge

- **Shape** : j-bent, round, 2.0 straight gauge

Instant Drive 360 freewheel technology

12mm front hub cap (V2680501)

WHEEL HUB

- **Body** : aluminum

- **Body** : aluminum

- **Body design** : INFINITY

- **Body design** : INFINITY

- **Disc standard** : 6 Bolts only

- **Disc standard** : 6 Bolts only

- **Axle material** : aluminum

- **Axle material** : aluminum

- **Rear body** : aluminum

- **Rear body** : aluminum

- **Axles** : Front 15X110 (Boost) or 15x100 ; Rear

- 12X148 (Boost) or 12x142

- **Axles** : Front 15X110 (Boost) or 15x100 ; Rear

- 12X148 (Boost) or 12x142

- **Front** : Quick release, 12x100 and 15x100

- through axle compatible

- **Front** : Quick release, 12x100 and 15x100

- through axle compatible

- **Freewheel** : FTS-L steel

- **Freewheel** : FTS-L steel

WHEEL WEIGHTS