



ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
 Taille minimale du pneu: largeur 52mm - pression max. 2.35Bar/34PSI
 Recommended tire sizes: 50mm to 76mm (2.0" to 3.0")
 Taille maximale du pneu: largeur 125mm - pression max. 1.25Bar/18PSI
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

RÄÖFÄÖRENCES ROUES

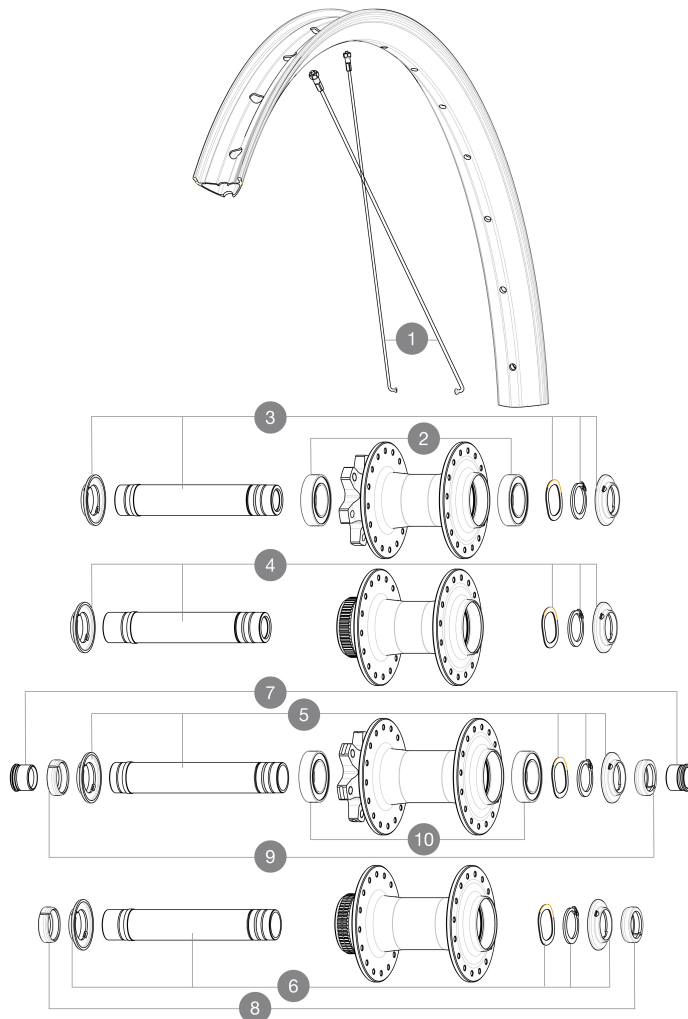

RAYONS

1	V00062531	Kit 16ft/rr Jbent bk rd spk275 27,5"+np
---	-----------	---

MOYEUX

	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
3	V2375501	Kit QRM auto front axle 100x12/15mm D6T
4	V2374001	KIT 12x100mm FRONT AXLE DCL QRM AUTO ALLROAD > 2019
5	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
6	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL

ADAPTATEURS

7	V2680201	12mmFtRoadAxleAdaptersQRM
8	V2680501	12mm Road Axle Cap QRM Auto
9	V2372501	15mm MTB Axle Cap QRM Auto From 2019
	99694101	2 REDUCTEURS 15/9mm
	V2680301	Kit Ft Road Adapter 12 >> 9mm

MAVIC

E-SPEEDCITY 1 650B

2023

FRONT

LIVRE AVEC

Fond de jante tubeless prêt à installer	
Rondelle de cassette M9 non montée sur la roue arrière	
User guide	
User guide	

COMPATIBILITE

Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Corps de roue libre: convertible SRAM XD route (kit V2580101 vendu séparément)	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement	
Corps de roue libre: convertible SHIMANO HG light route (kit V3850101 vendu séparément)	
Corps de roue libre: convertible SHIMANO MS (kit V3990101 vendu séparément)	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Corps de roue libre: convertible CAMPAGNOL N3W (kit V4270101 vendu séparément)	
Axe arrière : axe traversant de 12 mm convertible en blocage rapide au moyen d'adaptateurs	
Corps de roue libre ID360 Sram XD ([V3740101])	
Axe arrière : fixation par écrous uniquement (fournis), filetage M9x1	
ID360 Shimano Micro Spline alloy freewheel body ([V3990101])	

Spécifications

JANTES

- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Height** : 21 mm
- **Height** : 21 mm
- **Joint** : sleeved
- **Joint** : sleeved
- **Drilling** : traditional
- Disc brake specific profile
- **Internal width** : 30 mm
- E-Bike specific rim profile
- **Valve hole diameter** : 6.5 mm
- **Tire** : UST Tubeless and tubetype
- **Perçage** : traditionnel (avant/arrière 32 trous)
- **Internal width** : 30 mm

- Disc brake specific profile
- E-Bike specific rim profile
- **Taille ETRTO** : 584x30TSS
- Hookless profile
- Pinch Flat Protection sidewall (minimizes the risk of tire cuts and punctures)

- **ETRTO size** 27.5" : 584x30TC
- **Pneu** : UST Tubeless Ready - Utiliser avec le fond de jante tubeless Mavic

MOYEUX

- **Matériau du corps** : aluminium
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Conception du corps** : CLASSIC
- **Front** : Quick release, 12x100 and 15x100 through axle compatible
- **Standard de disque** : 6 trous ou Center Lock
- **Rear** : Quick Release, 12x142 and 12x135 compatible
- **Axle material** : aluminum
- **Taille de l'axe** : avant 12x100 / arrière 12x142 - Convertible en blocage rapide avec les adaptateurs fournis
- **Technologie de la roue libre** : Instant Drive 360
- **Roue libre** : Shimano HG route
- **Technologie des roulements** : QRM réglage automatique - cartouche à tanche
- Moyeu disponible avec disque de frein Center Lock uniquement
- Instant Drive 360 freewheel technology
- QRM Auto bearing preload technology

VERSIONS

POIDS ROUES

1014