



ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
Taille minimale du pneu: largeur 52mm - pression max. 2.35Bar/34PSI  
Recommended tire sizes: 50mm to 76mm (2.0" to 3.0")  
Taille maximale du pneu: largeur 125mm - pression max. 1.25Bar/18PSI  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

RAYONS

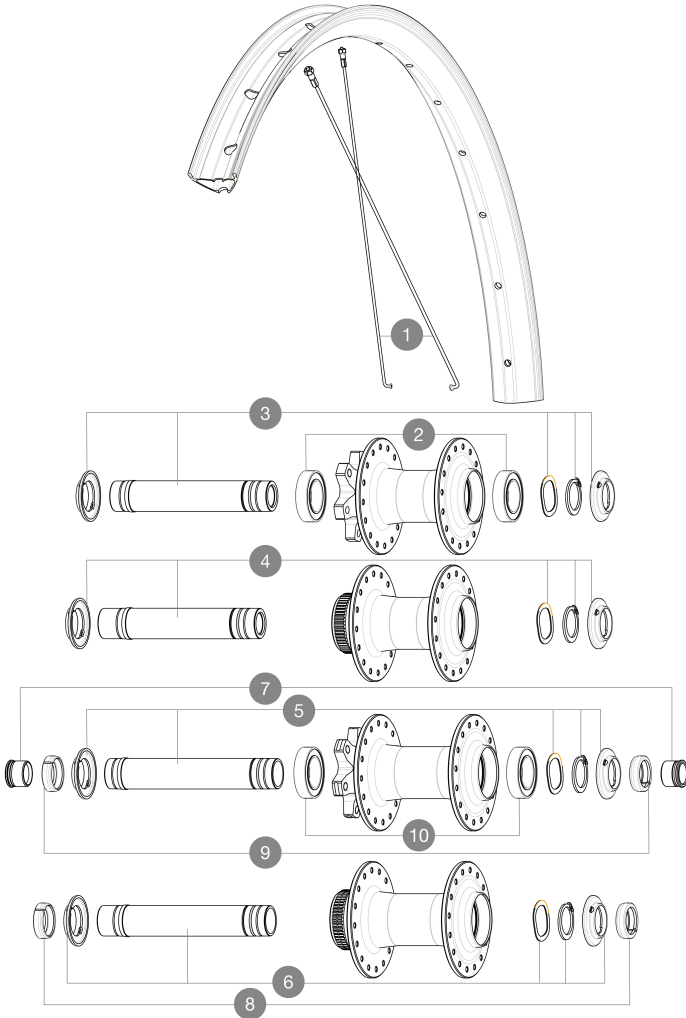

RAYONS

|   |           |                                         |
|---|-----------|-----------------------------------------|
| 1 | V00062531 | Kit 16ft/rr Jbent bk rd spk275 27,5"+np |
|---|-----------|-----------------------------------------|

MOYEURS

|   |          |                                                     |
|---|----------|-----------------------------------------------------|
|   | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP          |
| 3 | V2375501 | Kit QRM auto front axle 100x12/15mm D6T             |
| 4 | V2374001 | KIT 12x100mm FRONT AXLE DCL QRM AUTO ALLROAD > 2019 |
| 5 | V2372401 | KIT 110mm AXLE QRM AUTO MTB > 2019                  |
| 6 | V2375601 | Kit 110mm axle QRM auto MTB from 2019 DCL           |

ADAPTATEURS

|   |          |                                      |
|---|----------|--------------------------------------|
| 7 | V2680201 | 12mmFtRoadAxleAdaptersQRM            |
| 8 | V2680501 | 12mm Road Axle Cap QRM Auto          |
| 9 | V2372501 | 15mm MTB Axle Cap QRM Auto From 2019 |
|   | 99694101 | 2 REDUCTEURS 15/9mm                  |
|   | V2680301 | Kit Ft Road Adapter 12 >> 9mm        |

MAVIC

E-SPEEDCITY 1 650B

LIVRE AVEC

|                                                        |  |
|--------------------------------------------------------|--|
| Fond de jante tubeless prêt à installer                |  |
| Rondelle de cassette M9 non montée sur la roue arrière |  |
| User guide                                             |  |
| User guide                                             |  |

COMPATIBILITE

|                                                                                                                                            |  |
|--------------------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies                                          |  |
| Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement |  |
| Corps de roue libre: convertible SRAM XD route (kit V2580101 vendu séparément)                                                             |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement                                        |  |
| Corps de roue libre: convertible SHIMANO HG light route (kit V3850101 vendu séparément)                                                    |  |
| Corps de roue libre: convertible SHIMANO MS (kit V3990101 vendu séparément)                                                                |  |
| Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement |  |
| Corps de roue libre: convertible CAMPAGNOL N3W (kit V4270101 vendu séparément)                                                             |  |
| Axe arrière : axe traversant de 12 mm convertible en blocage rapide au moyen d'adaptateurs                                                 |  |
| Corps de roue libre ID360 Sram XD ([V3740101])                                                                                             |  |
| Axe arrière : fixation par écrous uniquement (fournis), filetage M9x1                                                                      |  |
| ID360 Shimano Micro Spline alloy freewheel body ([V3990101])                                                                               |  |

Spécifications

JANTES

- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Height** : 21 mm
- **Height** : 21 mm
- **Joint** : sleeved
- **Joint** : sleeved
- **Drilling** : traditional
- Disc brake specific profile
- **Internal width** : 30 mm
- E-Bike specific rim profile
- **Valve hole diameter** : 6.5 mm
- **Tire** : UST Tubeless and tubetype
- **Perçage** : traditionnel (avant/arrière 32 trous)

- Disc brake specific profile
- **Internal width** : 30 mm
- E-Bike specific rim profile
- **Taille ETRTO** : 584x30TSS
- Hookless profile
- Pinch Flat Protection sidewall (minimizes the risk of tire cuts and punctures)

- **ETRT0 size 27.5"** : 584x30TC
- **Pneu** : UST Tubeless Ready - Utiliser avec le fond de jante tubeless Mavic

MOYEUX

- **Matériau du corps** : aluminium
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Conception du corps** : CLASSIC
- **Front** : Quick release, 12x100 and 15x100 through axle compatible
- **Standard de disque** : 6 trous ou Center Lock
- **Rear** : Quick Release, 12x142 and 12x135 compatible
- **Axle material** : aluminum
- **Taille de l'axe** : avant 12x100 / arrière 12x142 - Convertible en blocage rapide avec les adaptateurs fournis
- **Technologie de la roue libre** : Instant Drive 360
- **Roue libre** : Shimano HG route
- **Technologie des roulements** : QRM réglage automatique - cartouche à tanche
- Moyeu disponible avec disque de frein Center Lock uniquement
- Instant Drive 360 freewheel technology
- QRM Auto bearing preload technology

VERSIONS

POIDS ROUES

1014