


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
Mindestgröße des Reifens: Breite 52mm - max. Druck 2.35Bar/34PSI  
Recommended tire sizes: 50mm to 76mm (2.0" to 3.0")  
Maximale Reifengröße: Breite 125mm - max. Druck 1.25Bar/18PSI  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

## REFERENZEN RADDER

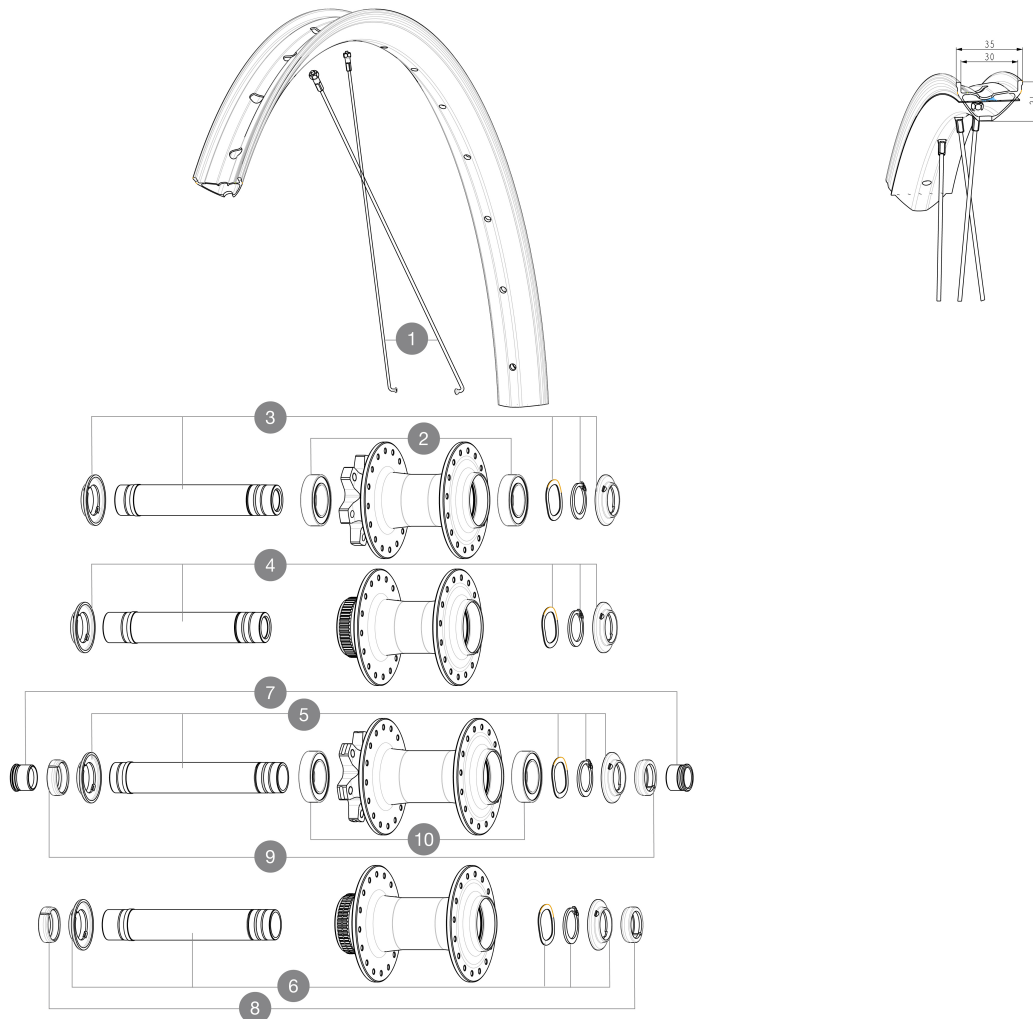

## SPOKES

|   |           |                                         |
|---|-----------|-----------------------------------------|
| 1 | V00062531 | Kit 16ft/rr Jbent bk rd spk275 27,5"+np |
|---|-----------|-----------------------------------------|

## HUB SHELLS

|   |          |                                                     |
|---|----------|-----------------------------------------------------|
|   | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP          |
| 3 | V2375501 | Kit QRM auto front axle 100x12/15mm D6T             |
| 4 | V2374001 | KIT 12x100mm FRONT AXLE DCL QRM AUTO ALLROAD > 2019 |
| 5 | V2372401 | KIT 110mm AXLE QRM AUTO MTB > 2019                  |
| 6 | V2375601 | Kit 110mm axle QRM auto MTB from 2019 DCL           |

## ADAPTERS

|   |          |                                      |
|---|----------|--------------------------------------|
| 7 | V2680201 | 12mmFtRoadAxleAdaptersQRM            |
| 8 | V2680501 | 12mm Road Axle Cap QRM Auto          |
| 9 | V2372501 | 15mm MTB Axle Cap QRM Auto From 2019 |
|   | 99694101 | 2 REDUCERS 15/9mm                    |
|   | V2680301 | "Kit Ft Road Adapter 12 >> 9mm"      |

GELIEFERT MIT

|                                                         |  |
|---------------------------------------------------------|--|
| Tubeless-Felgenband                                     |  |
| Kassettenunterlegscheibe M9 nicht am Hinterrad montiert |  |
| User guide                                              |  |
| User guide                                              |  |

COMPATIBILITY

|                                                                                                                                            |  |
|--------------------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies                                          |  |
| Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement |  |
| Freilaufkörper: SRAM XD Straize-Konverter (Kit V2580101 separat erhältlich)                                                                |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement                                        |  |
| Freilaufkörper: SHIMANO HG light Straize-Konverter (Kit V3850101 separat erhältlich)                                                       |  |
| Freilaufkörper: SHIMANO MS-Konverter (Kit V3990101 separat erhältlich)                                                                     |  |
| Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement |  |
| Freilaufkörper: CAMPAGNOLO N3W-Konverter (Kit V4270101 separat erhältlich)                                                                 |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)                                     |  |
| Instant Drive 360-Freilaufkörper für Sram XD-Ritzelkassetten (V3740101)                                                                    |  |
| HR-Achse: nur für Schraubmuttern (im Lieferumfang enthalten), M10x1-Gewinde                                                                |  |
| ID360 Shimano Micro Spline alloy freewheel body (V3990101))                                                                                |  |

Specifications

FELGEN

- Material : S6000 Aluminum
- Material : S6000 Aluminum
- Height : 21 mm
- Height : 21 mm
- Joint : sleeved
- Joint : sleeved
- Drilling : traditional
- Disc brake specific profile
- Internal width : 30 mm
- E-Bike specific rim profile
- Valve hole diameter : 6.5 mm
- Tire : UST Tubeless and tubetype
- Bohren : herkömmlich (vorne/hinten 32 Löcher)
- Disc brake specific profile
- Internal width : 30 mm
- E-Bike specific rim profile
- ETRTO-Größe : 584x30TSS
- Hookless profile
- Pinch Flat Protection sidewall (minimizes the risk of tire cuts and punctures)
- ETRTO size 27.5" : 584x30TC
- Reifen : UST Tubeless Ready - Verwendung mit Mavic Tubeless-Felgenband

RADNABE

- Körpermaterial : aluminium
- Front and rear bodies : aluminum
- Axle material : aluminum
- Körperdesign : CLASSIC
- Front : Quick release, 12x100 and 15x100 through axle compatible
- Standard Disc : 6 Löcher oder Center Lock®
- Rear : Quick Release, 12x142 and 12x135 compatible
- Axle material : aluminum
- Achsgröße : vorne 12x100 / hinten 12x142 - Mit den mitgelieferten Adaptern in einen Schnellspanner umwandelbar
- Freilauftechnologie : Instant Drive 360
- Freilauf : Shimano HG Straize
- Technologie der Lager : QRM automatische einstellung - abgedichtete patrone
- Nabe nur für Center-Lock®-Bremssscheiben erhältlich
- Instant Drive 360 freewheel technology
- QRM Auto bearing preload technology

VERSIONS

RADGEWICHTE

1014