

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm

æ□□â°□â□¿â□²â□²â□²â□²â□²â□²â°i¼□â' 52mm-

æ□□â²§ç©°æ°□â□²2.35Bar/34PSI


Recommended tire sizes: 50mm to 76mm (2.0" to 3.0")

æ□□â²§â□¿â□²â□²â□²â□²â□²â□²â°i¼□â' 125mm-

æ□□â²§ç©°æ°□â□²1.25Bar/18PSI

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

参照ホイール

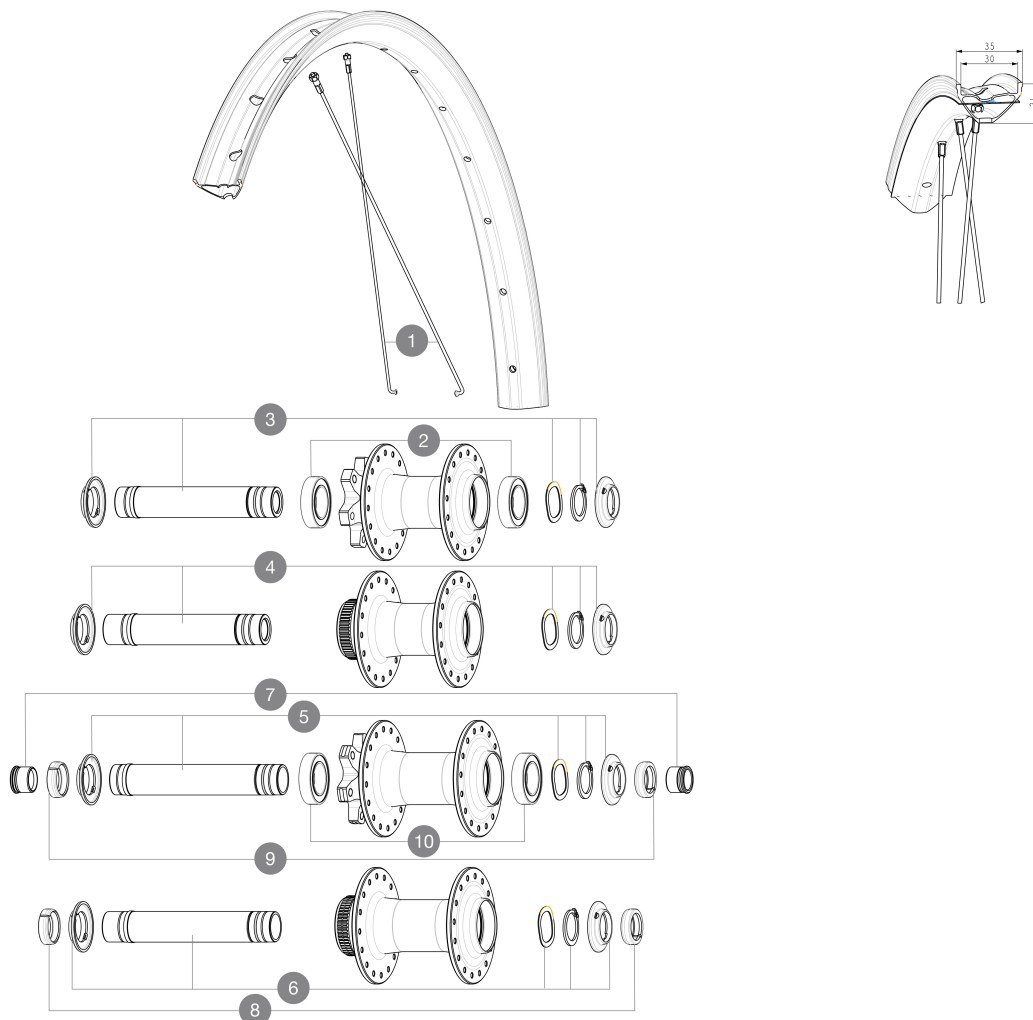

SPOKES

1 V00062531 Kit 16ft/rr Jbent bk rd spk275 27,5"+np

HUB SHELLS

V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
3 V2375501	Kit QRM auto front axle 100x12/15mm D6T
4 V2374001	KIT 12x100mm FRONT AXLE DCL QRM AUTO ALLROAD > 2019
5 V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
6 V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL

ADAPTERS

7 V2680201	12mmFtRoadAxleAdaptersQRM
8 V2680501	12mm Road Axle Cap QRM Auto
9 V2372501	15mm MTB Axle Cap QRM Auto From 2019
99694101	2 REDUCERS 15/9mm
V2680301	"Kit Ft Road Adapter 12 >> 9mm"

