


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
Misura minima del pneumatico: larghezza 52 mm - pressione massima 2,35 Bar/34 PSI
Recommended tire sizes: 50mm to 76mm (2.0" to 3.0")
Misura massima del pneumatico: larghezza 125 mm - pressione massima 1,25 Bar/18 PSI
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

REFERENZE RUOTE

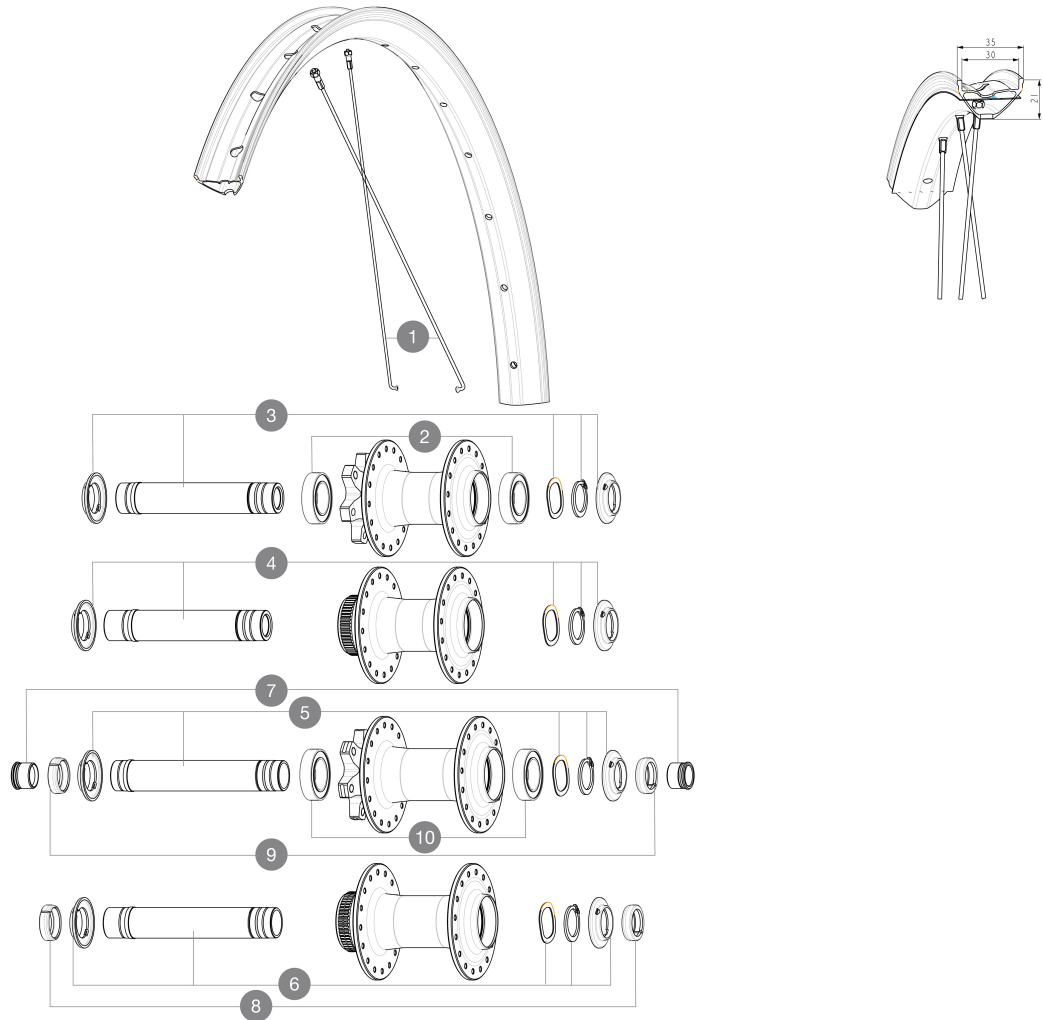

SPOKES

1	V00062531	Kit 16ft/rr Jbent bk rd spk275 27,5"+np
---	-----------	---

HUB SHELLS

	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
3	V2375501	Kit QRM auto front axle 100x12/15mm D6T
4	V2374001	KIT 12x100mm FRONT AXLE DCL QRM AUTO ALLROAD > 2019
5	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
6	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL

ADAPTERS

7	V2680201	12mmFtRoadAxleAdaptersQRM
8	V2680501	12mm Road Axle Cap QRM Auto
9	V2372501	15mm MTB Axle Cap QRM Auto From 2019
	99694101	2 REDUCERS 15/9mm
	V2680301	"Kit Ft Road Adapter 12 >> 9mm"

VENDUTO CON

Flap tubeless preinstallato	
Rondella per cassetta M9 non montata sulla ruota posteriore	
User guide	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Corpo ruota libera: convertibile SRAM XD strada (kit V2580101 venduto separatamente)	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement	
Corpo ruota libera: convertibile SHIMANO HG light strada (kit V3850101 venduto separatamente)	
Corpo ruota libera: convertibile SHIMANO MS (kit V3990101 venduto separatamente)	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Corpo ruota libera: convertibile CAMPAGNOLO N3W (kit V4270101 venduto separatamente)	
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)	
Corpo ruota libera ID360 Sram XD (V3740101))	
Perno posteriore: solo per i dadi di fissaggio (inclusi), filettatura M9x1	
ID360 Shimano Micro Spline alloy freewheel body (V3990101))	

Specifications

CERCHIONI

- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Height** : 21 mm
- **Height** : 21 mm
- **Joint** : sleeved
- **Joint** : sleeved
- **Drilling** : traditional
- Disc brake specific profile
- **Internal width** : 30 mm
- E-Bike specific rim profile
- **Valve hole diameter** : 6.5 mm
- **Tire** : UST Tubeless and tubetype
- **Foratura** : tradizionale (32 fori anteriori/posteriori)
- Disc brake specific profile
- **Internal width** : 30 mm
- E-Bike specific rim profile
- **Dimensione ETRTO** : 584x30TSS
- Hookless profile
- Pinch Flat Protection sidewall (minimizes the risk of tire cuts and punctures)
- **ETRTO size 27.5"** : 584x30TC
- **Pneumatico** : UST Tubeless Ready - Utilizzare con il nastro per cerchi tubeless Mavic

MOZZO

- **Materiale del corpo** : alluminio
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Design del corpo** : CLASSIC
- **Front** : Quick release, 12x100 and 15x100 through axle compatible
- **Disco standard** : solo 6 fori o Center Lock
- **Rear** : Quick Release, 12x142 and 12x135 compatible
- **Axle material** : aluminum
- **Dimensioni dell'asse** : anteriore 12x100 / posteriore 12x142 - Trasformabile in sgancio rapido con gli adattatori in dotazione
- **Tecnologia ruota libera** : Instant Drive 360
- **Ruota libera** : Shimano HG strada
- **Tecnologia dei cuscinetti** : QRM autoregolazione - cartuccia sigillata
- Mozzo disponibile solo con rotori dei freni Center Lock
- Instant Drive 360 freewheel technology
- QRM Auto bearing preload technology

VERSIONS

PESI RUOTE

1014