


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
Misura minima del pneumatico: larghezza 52 mm - pressione massima 2,35 Bar/34 PSI
Recommended tire sizes: 50mm to 76mm (2.0" to 3.0")
Misura massima del pneumatico: larghezza 125 mm - pressione massima 1,25 Bar/18 PSI
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

REFERENZE RUOTE

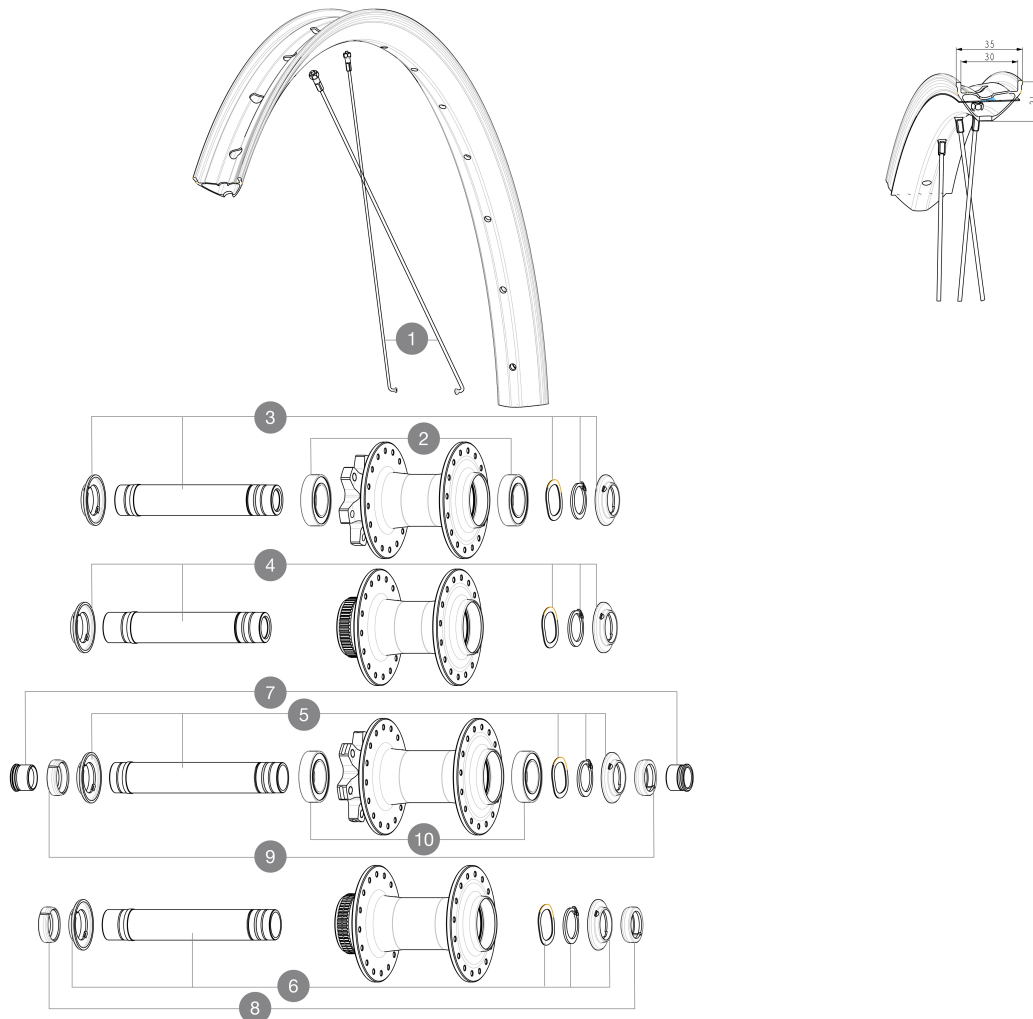

SPOKES

1 V00062531 Kit 16ft/rr Jbent bk rd spk275 27,5"+np

HUB SHELLS

V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
3 V2375501	Kit QRM auto front axle 100x12/15mm D6T
4 V2374001	KIT 12x100mm FRONT AXLE DCL QRM AUTO ALLROAD > 2019
5 V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
6 V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL

ADAPTERS

7 V2680201	12mmFtRoadAxleAdaptersQRM
8 V2680501	12mm Road Axle Cap QRM Auto
9 V2372501	15mm MTB Axle Cap QRM Auto From 2019
99694101	2 REDUCERS 15/9mm
V2680301	"Kit Ft Road Adapter 12 >> 9mm"

VENDUTO CON

Flap tubeless preinstallato	
Rondella per cassetta M9 non montata sulla ruota posteriore	
User guide	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Corpo ruota libera: convertibile SRAM XD strada (kit V2580101 venduto separatamente)	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement	
Corpo ruota libera: convertibile SHIMANO HG light strada (kit V3850101 venduto separatamente)	
Corpo ruota libera: convertibile SHIMANO MS (kit V3990101 venduto separatamente)	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Corpo ruota libera: convertibile CAMPAGNOLO N3W (kit V4270101 venduto separatamente)	
Corpo ruota libera ID360 Sram XD (V3740101)	
Perno posteriore: solo per i dadi di fissaggio (inclusi), filettatura M9x1	
ID360 Shimano Micro Spline alloy freewheel body (V3990101)	
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)	

Specifications

CERCHIONI

- Material : S6000 Aluminum
- Material : S6000 Aluminum
- Height : 21 mm
- Height : 21 mm
- Joint : sleeved
- Joint : sleeved
- Drilling : traditional
- Disc brake specific profile
- Internal width : 30 mm
- E-Bike specific rim profile
- Valve hole diameter : 6.5 mm
- Tire : UST Tubeless and tubetype
- Foratura : tradizionale (32 fori anteriori/posteriori)
- Internal width : 30 mm
- Disc brake specific profile
- E-Bike specific rim profile
- Dimensione ETRTO : 584x30TSS
- Hookless profile
- Pinch Flat Protection sidewall (minimizes the risk of tire cuts and punctures)
- ETRTO size 27.5" : 584x30TC
- Pneumatico : UST Tubeless Ready - Utilizzare con il nastro per cerchi tubeless Mavic

MOZZO

- Materiale del corpo : alluminio
 - Front and rear bodies : aluminum
 - Axle material : aluminum
 - Design del corpo : CLASSIC
 - Front : Quick release, 12x100 and 15x100 through axle compatible
 - Disco standard : solo 6 fori o Center Lock
 - Rear : Quick Release, 12x142 and 12x135 compatible
 - Axle material : aluminum
 - Dimensioni dell'asse : anteriore 12x100 / posteriore 12x142 - Trasformabile in sgancio rapido con gli adattatori in dotazione
 - Tecnologia ruota libera : Instant Drive 360
 - Ruota libera : Shimano HG strada
 - Tecnologia dei cuscinetti : QRM autoregolazione - cartuccia sigillata
 - Mozzo disponibile solo con rotori dei freni Center Lock
 - Instant Drive 360 freewheel technology
 - QRM Auto bearing preload technology
- VERSIONS

PESI RUOTE

1014