


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
 Taille minimale du pneu: largeur 52mm - pression max. 2.35Bar/34PSI
 Recommended tire sizes: 50mm to 76mm (2.0" to 3.0")
 Taille maximale du pneu: largeur 125mm - pression max. 1.25Bar/18PSI
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

RÉFÉRENCES ROUES

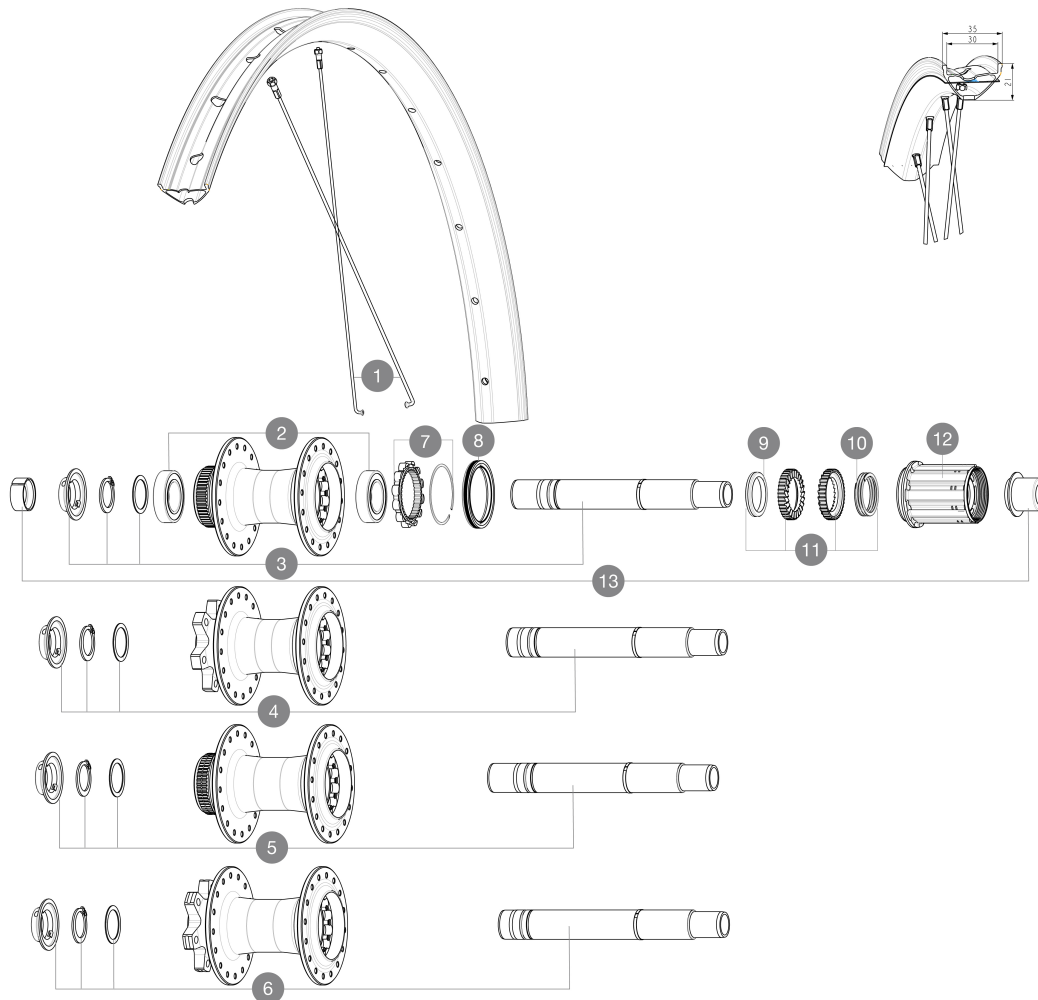

RAYONS

1	V00062531	Kit 16ft/rr Jbent bk rd spk275 27,5"+np
---	-----------	---

MOYEUX

2	M40076	HUB BEARINGS 17x30x7 6903 x 2
3	V2373401	KIT ID360 135/142 DCL L1 AXLE WITH CLIP
4	V2372101	KIT ID360 135/142 D6T AXLE WITH CLIP
5	V2375701	Kit ID360 148 DCL axle with circlip
6	V2372201	KIT ID360 148 D6T AXLE WITH CLIP
7	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
8	V00063631	Kit ID360 seal version 2 (larger)
9	V2375401	KIT ID360 MTB 24T 3 NOISE REDUCING PADS
10	V2372901	KIT 3 ID360 MTB SPRINGS
11	V2375201	KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific)
12	V3430101	HG11 Freewheel Body ID360

OPTIONS

V2373001	KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing
----------	---

ADAPTATEURS

13	V2510701	ID360 EVO REAR AXLE ADAPTERS 12x142mm DCL & D6T
	V2510901	ID360 EVO REAR AXLE ADAPTERS 12x135mm DCL & D6T
	V2510801	ID360 EVO REAR AXLE ADAPTERS 9x135mm DCL & D6T

MAVIC

E-SPEEDCITY 1 650B

2023

REAR

LIVRE AVEC

Fond de jante tubeless prêt à installer	
Rondelle de cassette M9 non montée sur la roue arrière	
User guide	
User guide	

COMPATIBILITE

Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement	
Corps de roue libre: convertible SRAM XD route (kit V2580101 vendu séparément)	
Corps de roue libre: convertible SHIMANO HG light route (kit V3850101 vendu séparément)	
Corps de roue libre: convertible SHIMANO MS (kit V3990101 vendu séparément)	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Corps de roue libre: convertible CAMPAGNOL N3W (kit V4270101 vendu séparément)	
Axe arrière : axe traversant de 12 mm convertible en blocage rapide au moyen d'adaptateurs	
Corps de roue libre ID360 Sram XD ([V3740101])	
Axe arrière : fixation par écrous uniquement (fournis), filetage M9x1	
ID360 Shimano Micro Spline alloy freewheel body ([V3990101])	

Spécifications

JANTES

- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Height** : 21 mm
- **Height** : 21 mm
- **Joint** : sleeved
- **Joint** : sleeved
- **Drilling** : traditional
- Disc brake specific profile
- **Internal width** : 30 mm
- E-Bike specific rim profile
- **Valve hole diameter** : 6.5 mm
- **Tire** : UST Tubeless and tubetype
- **Perçage** : traditionnel (avant/arrière 32 trous)
- **Internal width** : 30 mm

- Disc brake specific profile
- E-Bike specific rim profile
- **Taille ETRTO** : 584x30TSS
- Hookless profile
- Pinch Flat Protection sidewall (minimizes the risk of tire cuts and punctures)

- **ETRTO size** 27.5" : 584x30TC
- **Pneu** : UST Tubeless Ready - Utiliser avec le fond de jante tubeless Mavic

MOYEURS

- **Matériau du corps** : aluminium
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Conception du corps** : CLASSIC
- **Front** : Quick release, 12x100 and 15x100 through axle compatible
- **Standard de disque** : 6 trous ou Center Lock
- **Rear** : Quick Release, 12x142 and 12x135 compatible
- **Axle material** : aluminum
- **Taille de l'axe** : avant 12x100 / arrière 12x142 - Convertible en blocage rapide avec les adaptateurs fournis
- **Technologie de la roue libre** : Instant Drive 360
- **Roue libre** : Shimano HG route
- **Technologie des roulements** : QRM réglage automatique - cartouche à tanche
- Moyeu disponible avec disque de frein Center Lock uniquement
- Instant Drive 360 freewheel technology
- QRM Auto bearing preload technology

VERSIONS

POIDS ROUES

1137