


MAVIC E-SPEEDCITY 1 650B

1
2023
REAR

REFERENZEN RÄDER

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
Mindestgröße des Reifens: Breite 52mm - max. Druck 2.35Bar/34PSI
Recommended tire sizes: 50mm to 76mm (2.0" to 3.0")
Maximale Reifengröße: Breite 125mm - max. Druck 1.25Bar/18PSI
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

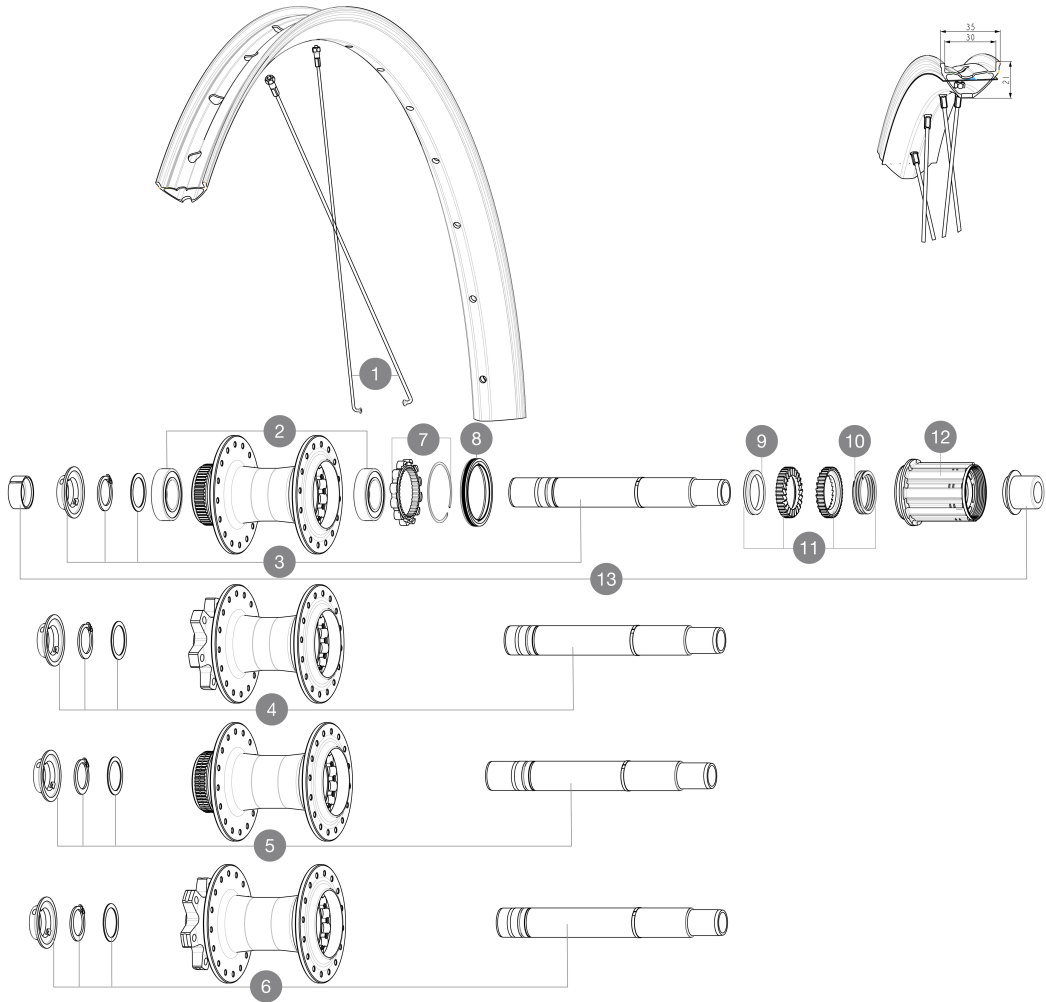

SPOKES

1	V00062531	Kit 16ft/rr Jbent bk rd spk275 27,5"+np
---	-----------	---

HUB SHELLS

2	M40076	HUB BEARINGS 17x30x7 6903 x 2
3	V2373401	KIT ID360 135/142 DCL L1 AXLE WITH CLIP
4	V2372101	KIT ID360 135/142 D6T AXLE WITH CLIP
5	V2375701	Kit ID360 148 DCL axle with circlip
6	V2372201	KIT ID360 148 D6T AXLE WITH CLIP
7	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
8	V00063631	Kit ID360 seal version 2 (larger)
9	V2375401	KIT ID360 MTB 24T 3 NOISE REDUCING PADS
10	V2372901	KIT 3 ID360 MTB SPRINGS
11	V2375201	KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific)
12	V3430101	HG11 Freewheel Body ID360

OPTIONS

V2373001	KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing
----------	---

ADAPTERS

13	V2510701	ID360 EVO REAR AXLE ADAPTERS 12x142mm DCL & D6T
	V2510901	ID360 EVO REAR AXLE ADAPTERS 12x135mm DCL & D6T
	V2510801	ID360 EVO REAR AXLE ADAPTERS 9x135mm DCL & D6T

GELIEFERT MIT

Tubeless-Felgenband	
Kassettenunterlegscheibe M9 nicht am Hinterrad montiert	
User guide	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Freilaufkörper: SRAM XD Straight-8-Konverter (Kit V2580101 separat erhältlich)	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement	
Freilaufkörper: SHIMANO HG light Straight-8-Konverter (Kit V3850101 separat erhältlich)	
Freilaufkörper: SHIMANO MS-Konverter (Kit V3990101 separat erhältlich)	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Freilaufkörper: CAMPAGNOLO N3W-Konverter (Kit V4270101 separat erhältlich)	
Instant Drive 360-Freilaufkörper für Sram XD-Ritzelkassetten (V3740101)	
HR-Achse: nur 1/4r Schraubmuttern (im Lieferumfang enthalten), M10x1-Gewinde	
ID360 Shimano Micro Spline alloy freewheel body (V3990101)	
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)	

Specifications

FELGEN

- Material : S6000 Aluminum
- Material : S6000 Aluminum
- Height : 21 mm
- Height : 21 mm
- Joint : sleeved
- Joint : sleeved
- Drilling : traditional
- Disc brake specific profile
- Internal width : 30 mm
- E-Bike specific rim profile
- Valve hole diameter : 6.5 mm
- Tire : UST Tubeless and tubetype
- Bohren : herkömmlich (vorne/hinten 32 Löcher)
- Internal width : 30 mm
- Disc brake specific profile
- E-Bike specific rim profile
- ETRTO-Größe : 584x30TSS
- Hookless profile
- Pinch Flat Protection sidewall (minimizes the risk of tire cuts and punctures)
- ETRTO size 27.5" : 584x30TC
- Reifen : UST Tubeless Ready - Verwendung mit Mavic Tubeless-Felgenband

RADNABE

- Körpermaterial : aluminium
- Front and rear bodies : aluminum
- Axle material : aluminum
- Körperdesign : CLASSIC
- Front : Quick release, 12x100 and 15x100 through axle compatible
- Standard Disc : 6 Löcher oder Center Lock®
- Rear : Quick Release, 12x142 and 12x135 compatible
- Axle material : aluminum
- Achsgröße : vorne 12x100 / hinten 12x142 - Mit den mitgelieferten Adaptern in einen Schnellspanner umwandelbar
- Freilauftechnologie : Instant Drive 360
- Freilauf : Shimano HG Straight-8
- Technologie der Lager : QRM automatische einstellung - abgedichtete patrone
- Nabe nur 1/4r Center-Lock®-Bremscheiben erhältlich
- Instant Drive 360 freewheel technology
- QRM Auto bearing preload technology

VERSIONS

RADGEWICHTE

1137