


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
Tamaño máximo del neumático: anchura 52 mm - presión máx. 2,35 bares/34 psi
Recommended tire sizes: 50mm to 76mm (2.0" to 3.0")
Tamaño máximo del neumático: anchura 125 mm - presión máx. 1,25 Bar/18 PSI
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

RUEDAS REFERENCIAS

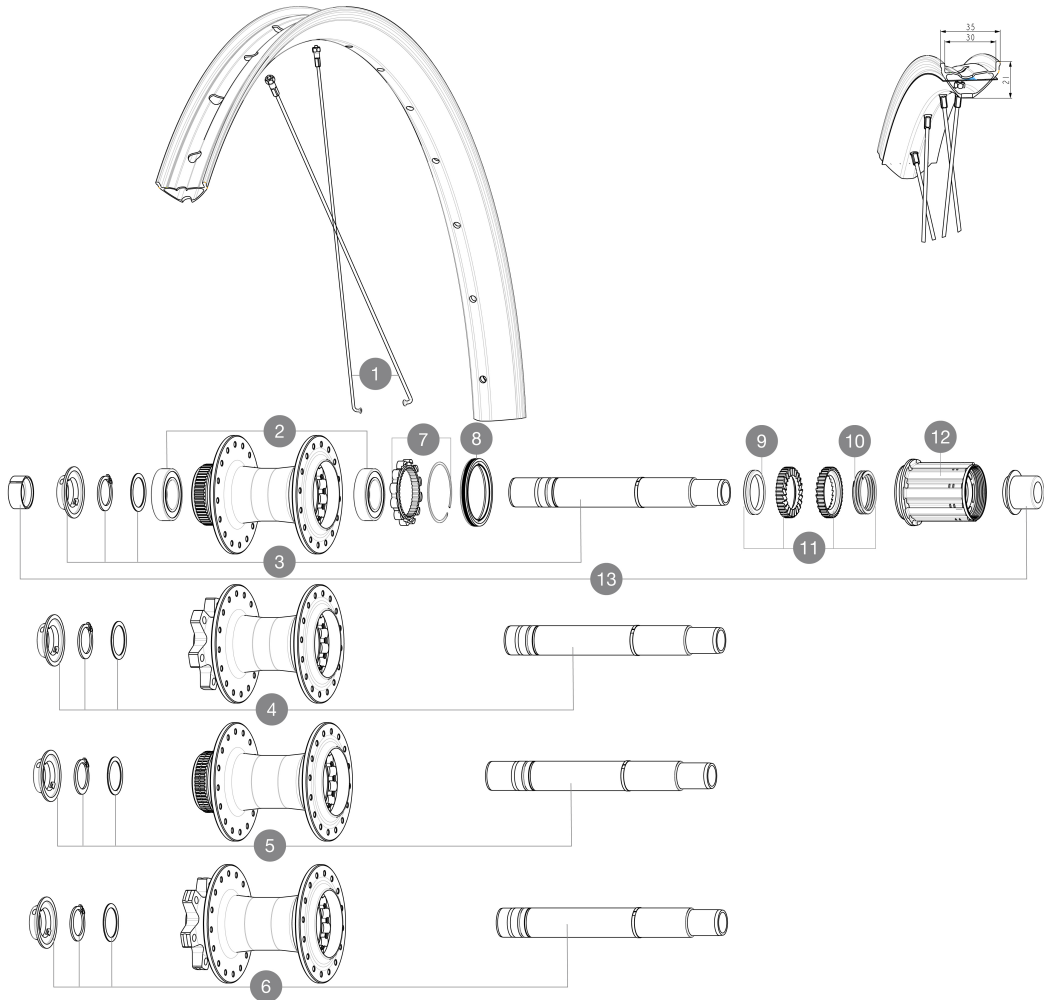

SPOKES

1	V00062531	Kit 16ft/rr Jbent bk rd spk275 27,5"+np
---	-----------	---

HUB SHELLS

2	M40076	HUB BEARINGS 17x30x7 6903 x 2
3	V2373401	KIT ID360 135/142 DCL L1 AXLE WITH CLIP
4	V2372101	KIT ID360 135/142 D6T AXLE WITH CLIP
5	V2375701	Kit ID360 148 DCL axle with circlip
6	V2372201	KIT ID360 148 D6T AXLE WITH CLIP
7	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
8	V00063631	Kit ID360 seal version 2 (larger)
9	V2375401	KIT ID360 MTB 24T 3 NOISE REDUCING PADS
10	V2372901	KIT 3 ID360 MTB SPRINGS
11	V2375201	KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific)
12	V3430101	HG11 Freewheel Body ID360

OPTIONS

V2373001	KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing
----------	---

ADAPTERS

13	V2510701	ID360 EVO REAR AXLE ADAPTERS 12x142mm DCL & D6T
	V2510901	ID360 EVO REAR AXLE ADAPTERS 12x135mm DCL & D6T
	V2510801	ID360 EVO REAR AXLE ADAPTERS 9x135mm DCL & D6T

ENTREGADO CON

Fondo de llanta Tubeless preinstalado	
Arandela de cassette M9 no montada en la rueda trasera	
User guide	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Cuerpo rueda libre: convertible SRAM XD carretera (kit V2580101 vendido por separado)	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement	
Cuerpo rueda libre: convertible SHIMANO HG ligera carretera (kit V3850101 vendido por separado)	
Cuerpo rueda libre: convertible SHIMANO MS (kit V3990101 vendido por separado)	
Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement	
Cuerpo rueda libre: convertible CAMPAGNOLO N3W (kit V4270101 vendido por separado)	
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)	
Núcleo de rueda libre Sram XD ID 360 (V3740101)	
Eje trasero: solo para tuercas de fijación (incluidas), rosca M9x1	
ID360 Shimano Micro Spline alloy freewheel body (V3990101)	

Specifications

LLANTAS

- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Height** : 21 mm
- **Height** : 21 mm
- **Joint** : sleeved
- **Joint** : sleeved
- **Drilling** : traditional
- Disc brake specific profile
- **Internal width** : 30 mm
- E-Bike specific rim profile
- **Valve hole diameter** : 6.5 mm
- **Tire** : UST Tubeless and tubetype
- **Perforación** : tradicional (delante/detrás 32 agujeros)

- Disc brake specific profile
- **Internal width** : 30 mm
- E-Bike specific rim profile
- **Talla ETRTO** : 584x30TSS
- Hookless profile
- Pinch Flat Protection sidewall (minimizes the risk of tire cuts and punctures)
- **ETRTO size 27.5"** : 584x30TC
- **Neumático** : UST Tubeless Ready - Utilizar con

BUJE DE LA RUEDA

- **Material del cuerpo** : aluminio
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Diseño del cuerpo** : CLASSIC
- **Front** : Quick release, 12x100 and 15x100 through axle compatible
- **Disco estándar** : sólo 6 orificios o Center Lock
- **Rear** : Quick Release, 12x142 and 12x135 compatible
- **Axle material** : aluminum
- **Tamaño del eje** : delantero 12x100 / trasero 12x142 - Convertible a cierre rápido con adaptadores suministrados
- **Tecnología de rueda libre** : Instant Drive 360
- **Rueda libre** : Shimano HG carretera
- **Tecnología de rodamientos** : QRM autoajustable - cartucho sellado
- El buje está disponible solo para rotores de freno Center Lock
- Instant Drive 360 freewheel technology
- QRM Auto bearing preload technology

VERSIONS

PESOS DE RUEDAS

1137