


## ASTM CATEGORY 3 : CROSS COUNTRY

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Minimum tyre size: width 52mm - pressure max. 2.35Bar/34PSI

Maximum tyre size: width 125mm - pressure max. 1.25Bar/18PSI

## REFERENCES WHEELS

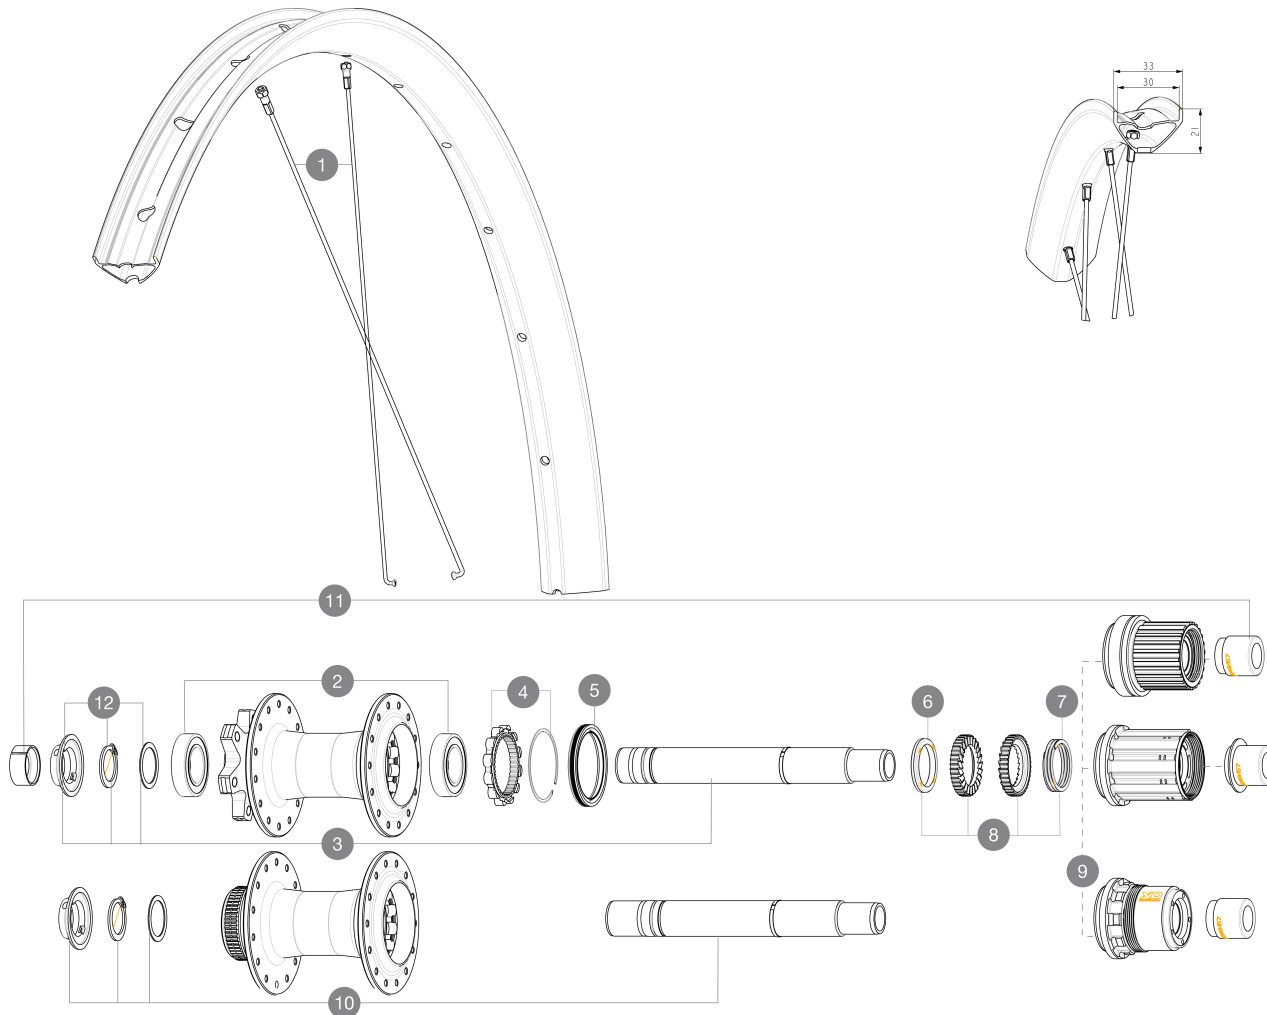

## SPOKES

|   |           |                                          |
|---|-----------|------------------------------------------|
| 1 | V00062331 | Kit 14 ft/rr Jbent bk rd spk 298 29''+np |
|---|-----------|------------------------------------------|

## HUB SHELLS

|    |          |                                                            |
|----|----------|------------------------------------------------------------|
| 2  | M40076   | HUB BEARINGS 17x30x7 6903 x 2                              |
| 3  | V2372201 | KIT ID360 148 D6T AXLE WITH CLIP                           |
| 4  | V2252701 | KIT ID360 INSERT SHAPED EAR LOBE > 2017                    |
| 5  | V2251601 | KIT ID360 SEAL + GREASE                                    |
| 6  | V2375401 | KIT ID360 MTB 24T 3 NOISE REDUCING PADS                    |
| 7  | V2372901 | KIT 3 ID360 MTB SPRINGS                                    |
| 8  | V2375201 | KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific) |
| 9  | V3990101 | MicroSpline MTB Freewheel Body ID360                       |
| 9  | V3780101 | HG9 Alloy MTB Freewheel Body ID360                         |
| 9  | V3740101 | XD MTB Freewheel Body ID360                                |
| 10 | V2375701 | Kit ID360 148 DCL axle with circlip                        |
| 12 | V2373001 | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing      |

## ADAPTERS

|    |          |                              |
|----|----------|------------------------------|
| 11 | V2510701 | ID360V2RrAxleAdapt12x142/148 |
|    | V2510801 | ID360 V2 RrAxleAdapt9x135    |



# CROSSRIDE 1 29 30MM

2023  
REAR

DELIVERED WITH

|                                 |  |
|---------------------------------|--|
| Pre-installed tubeless rim tape |  |
| User guide                      |  |

COMPATIBILITY

|                                                                                                        |  |
|--------------------------------------------------------------------------------------------------------|--|
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)                        |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel) |  |

Specifications

RIMS

- **Material** : S6000 Aluminum
  - **Height** : 21 mm
  - **Joint** : sleeved
  - **Internal width** : 30 mm
  - **Drilling** : traditional (front/rear 28 holes)
- Disc brake specific profile  
E-Bike specific rim profile
- **ETRTO size 29"** : 622x30TSS
  - **Tire** : clincher

SPOKES

- **Material** : steel
  - **Count** : 20 front and rear
- R2R carbon spoke technology

WHEEL HUB

- **Body** : aluminum
- **Disc standard** : 6 Bolts or Center Lock®
- **Axle material** : aluminum
- **Rear body** : aluminum
- **Axles** : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- **Freewheel** : Shimano HG MTB / Shimano MS / Sram XD MTB
- **Freewheel** : FTS-L steel

WHEEL WEIGHTS