


## REFERENCES WHEELS

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included  
Recommended tire sizes: 25 to 32 mm  
Max. Pressure: see indication on wheel and tire. If they differ, use the lowest of the 2



## RIMS

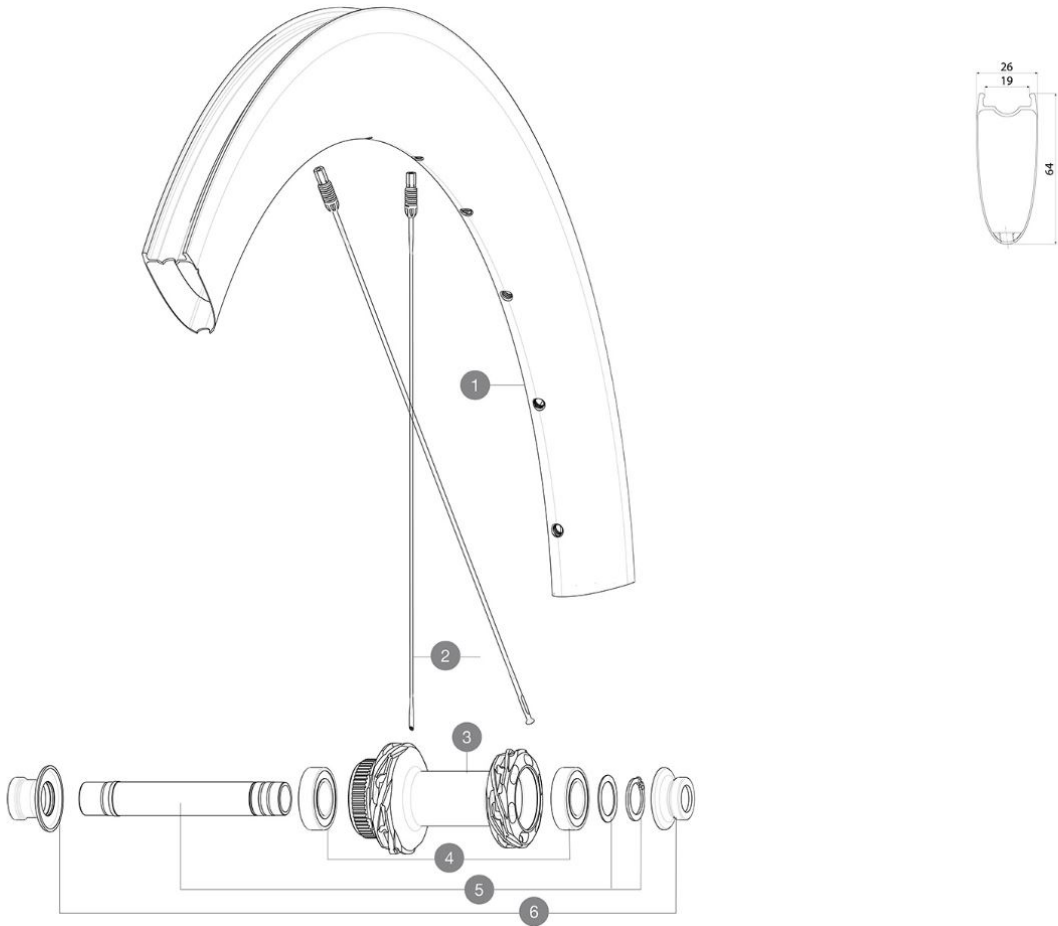

&amp;NBSP;:

|   |           |                                     |
|---|-----------|-------------------------------------|
| 1 | V00062631 | Kit Front/Rear rim Cosmic SLR65 Ltd |
|---|-----------|-------------------------------------|

## SPOKES

|   |          |                                          |
|---|----------|------------------------------------------|
| 2 | V4164901 | Kit 12 CosmicSLR65 Disc aero sspk M6 259 |
|---|----------|------------------------------------------|

## HUB SHELLS

|   |          |                                     |
|---|----------|-------------------------------------|
| 3 | N/A      | HUB BODY                            |
| 3 | N/A      | HUB BODY                            |
| 4 | M40129   | KIT 2 BEARINGS 6902 15x28x7         |
| 5 | V2373301 | KIT QRM AUTO FRONT AXLE 12mm > 2019 |

## ADAPTERS

|   |                      |                                                                                      |
|---|----------------------|--------------------------------------------------------------------------------------|
| 6 | V2374701<br>V2680301 | KIT FRONT ROAD FORK REST 12mm FOR J BENT DISC HUB<br>"Kit Ft Road Adapter 12 >> 9mm" |
|---|----------------------|--------------------------------------------------------------------------------------|



# COSMIC SLR 65 LTD

DELIVERED WITH

|                                           |  |
|-------------------------------------------|--|
| UST valve and accessories<br>(129 838 01) |  |
| User guide                                |  |

COMPATIBILITY

|                                                                                                                                  |  |
|----------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies                                |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement                              |  |
| Front axle: 12x100 thru axle, easily convertible to quick release with optional adapters. Not compatible with 15mm through axles |  |

Specifications

RIMS

- **Material** : 100% carbon fiber with UDÂ² external layer
  - **Material** : 100% carbon fiber
  - **Height** : 64mm
- Disc brake specific profile
- **Tire** : UST Tubeless and tubetype
  - **Internal width** : 19 mm
  - **ETRTO size** : 622x19TC
- Fore Carbon tapeless tubeless technology  
UST tubeless technology

SPOKES

- **Material** : steel
- **Shape** : straight pull, elliptical aero, double butted (patented)
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2, contactless

WHEEL HUB

- Infinity hubs
- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Instant Drive 360 freewheel technology  
QRM Auto bearing preload technology
- **Front** : Quick release and 12x100 through axle compatible
  - **Rear** : Quick Release, 12x142 and 12x135 compatible
- Hub available for Center Lock brake rotors only

VERSIONS

- **Disc standard** : Center LockÂ® only
- **Freewheel** : Shimano/Sram

WHEEL WEIGHTS

705