


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

Recommended tire sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tire. If they differ, use the lowest of the 2

参照ホイール

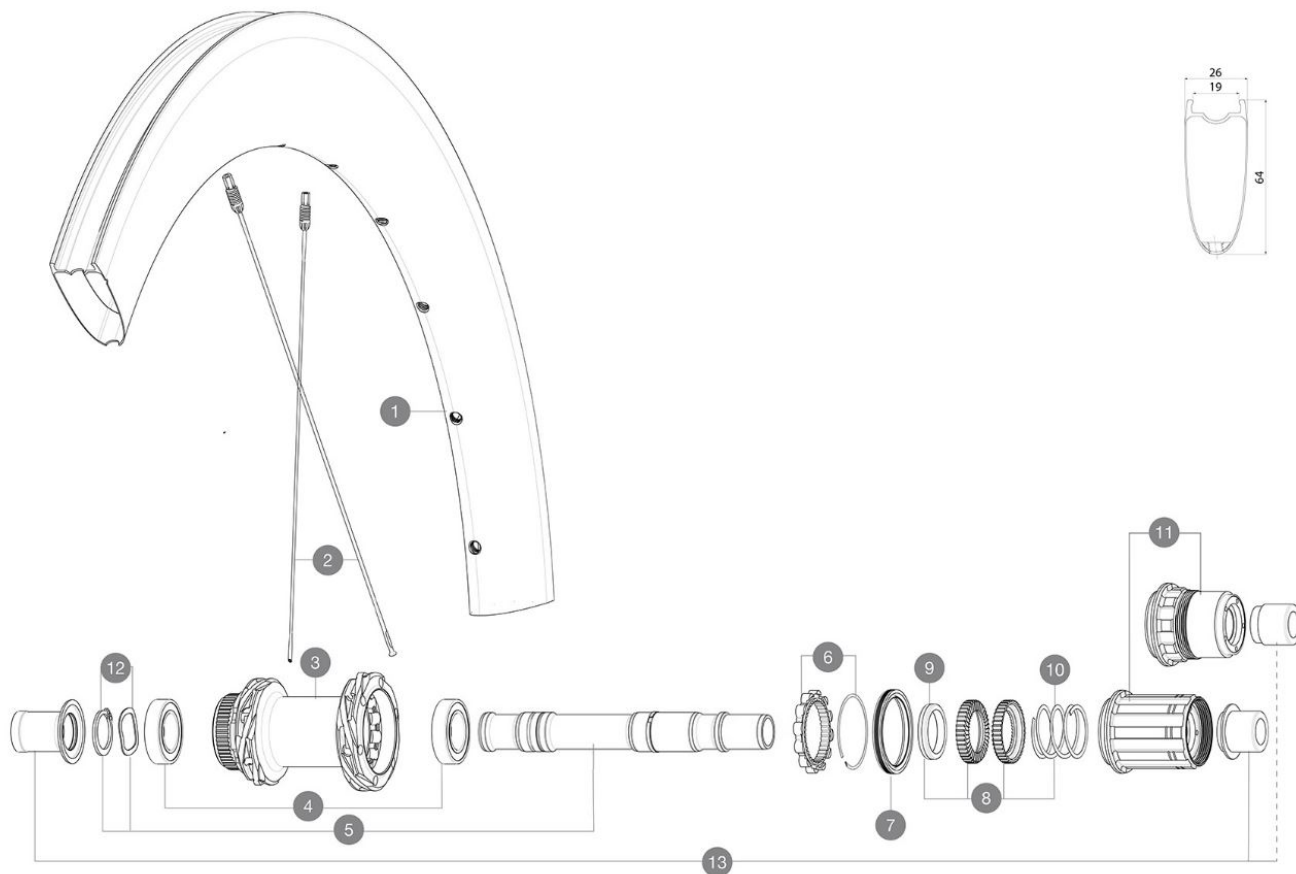

## RIMS



&NBSP::

|   |           |                                     |
|---|-----------|-------------------------------------|
| 1 | V00062631 | Kit Front/Rear rim Cosmic SLR65 Ltd |
|---|-----------|-------------------------------------|

## SPOKES

|   |          |                                          |
|---|----------|------------------------------------------|
| 2 | V4164901 | Kit 12 CosmicSLR65 Disc aero ssbk M6 259 |
|---|----------|------------------------------------------|

## HUB SHELLS

|    |           |                                                       |
|----|-----------|-------------------------------------------------------|
| 3  | N/A       | HUB BODY                                              |
| 3  | N/A       | HUB BODY                                              |
| 4  | M40076    | HUB BEARINGS 17x30x7 6903 x 2                         |
| 5  | V00046431 | KIT AXE ID360 142LIGHT CL+CIR                         |
| 6  | V2252701  | KIT ID360 INSERT SHAPED EAR LOBE > 2017               |
| 7  | V00063631 | Kit ID360 seal version 2 (larger)                     |
| 8  | V2251701  | ID360 2 RATCHETS + SPRING + GREASE                    |
| 9  | V2500501  | Kit 3 ID360 pad for noise reduction                   |
| 10 | V2251801  | KIT 3 ID360 ROAD SPRINGS                              |
| 11 | V2580101  | FREEHUB BODY XD Road ID360                            |
| 11 | V3430101  | HG11 Freewheel Body ID360                             |
| 12 | V2373001  | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing |

## OPTIONS

|          |                                         |
|----------|-----------------------------------------|
| V2373401 | KIT ID360 135/142 DCL L1 AXLE WITH CLIP |
|----------|-----------------------------------------|

## ADAPTERS

|    |          |                                                 |
|----|----------|-------------------------------------------------|
| 13 | V3811001 | KIT ROAD ID360 RR CL ENDCAP (12MM)              |
|    | V2510901 | ID360 EVO REAR AXLE ADAPTERS 12x135mm DCL & D6T |
|    | V2510801 | ID360 EVO REAR AXLE ADAPTERS 9x135mm DCL & D6T  |



# COSMIC SLR 65 LTD

付属品

|                                           |  |
|-------------------------------------------|--|
| UST valve and accessories<br>(129 838 01) |  |
| User guide                                |  |

COMPATIBILITY

|                                                                                                                                  |  |
|----------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies                                |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement                              |  |
| Front axle: 12x100 thru axle, easily convertible to quick release with optional adapters. Not compatible with 15mm through axles |  |

Specifications

リム

- Material : 100% carbon fiber with UD<sup>Å²</sup> external layer
- Material : 100% carbon fiber
- Height : 64mm
- Disc brake specific profile
- Tire : UST Tubeless and tubetype
- Internal width : 19 mm
- ETRTO size : 622x19TC
- Fore Carbon tapeless tubeless technology
- UST tubeless technology

スポーク

- Material : steel
- Shape : straight pull, elliptical aero, double butted (patented)
- Nipples : Fore integrated aluminum
- Count : 24 front and rear
- Lacing : front and rear crossed 2, contactless

ホイールハブ

- Front and rear bodies : aluminum
- Axle material : aluminum
- Front : Quick release and 12x100 through axle compatible
- Rear : Quick Release, 12x142 and 12x135 compatible
- Infinity hubs
- ã□□ã□□ã□`ã□»ã□³ã□¿ã□¼ã□ã□ã□`ã□¿ã□³ã□□ã□@ã□□ã□~ã□¼ã□ã□-ã□¼ã□¿ã□¼ã□@ã□¿ã□«ã`¾ã¿
- Instant Drive 360 freewheel technology
- QRM Auto bearing preload technology

VERSIONS

- Disc standard : Center Lock<sup>Å</sup> only
- Freewheel : Shimano/Sram

ホイールの重み

835