


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included Recommended tire sizes: 25 to 32 mm Max. Pressure: see indication on wheel and tire. If they differ, use the lowest of the 2

REFERENCES WHEELS

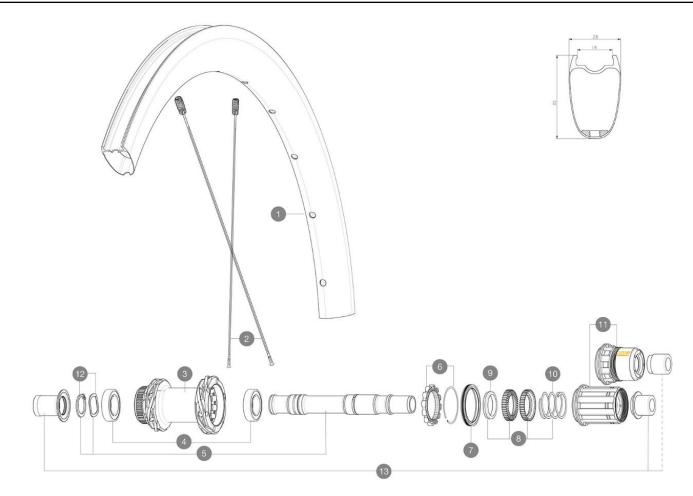

| RIMS : | | |
|-------------------|--|------|
| 1 V00062831 | Kit Front/Rear rim Cosmic SLR45 Ltd | ADAI |
| SPOKES | | |
| 2 V4163701 | Kit 12 Front/Rear Cosmic SLR 45 Disc aero stainless spoke 27 | |

HUB SHELLS

| 3 | N/A | HUB BODY |
|----|-----------|---|
| 3 | N/A | HUB BODY |
| 4 | M40076 | HUB BEARINGS 17x30x7 6903 x 2 |
| 5 | V00046431 | KIT AXE ID360 142LIGHT CL+CIR |
| 6 | V2252701 | KIT ID360 INSERT SHAPED EAR LOBE > 2017 |
| 7 | V00063631 | Kit ID360 seal version 2 (larger) |
| 8 | V2251701 | KIT ID360 2 RATCHETS + SPRING + GREASE |
| 9 | V2500501 | KIT ID360 3 PADS NOISE REDUCING |
| 10 | V2251801 | KIT 3 ID360 ROAD SPRINGS |
| 11 | V3430101 | HG11 Freewheel Body ID360 |
| 11 | V2580101 | FREEHUB BODY XD Road ID360 |
| 12 | V2373001 | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing |

OPTIONS

V2373401 KIT ID360 135/142 DCL L1 AXLE WITH CLIP

DAPTERS

| 13 | V3811001 | KIT ROAD ID360 RR CL ENDCAP (12MM) |
|----|----------|------------------------------------|
| | V2510901 | ID360 EVO RrAxleAdpt12x135/150 |
| | V2510801 | ID360 V2 RrAxleAdapt9x135 |



MAVIC COSMIC SLR 45 LTD

DELIVERED WITH

| UST valve and accessories (129 838 01) | | |
|---|--|--|
| User guide | | |

COMPATIBILITY

| Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies | |
|--|--|
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement | |
| Front axle: 12x100 thru axle, easily convertible to quick release with optional adapters. Not compatible with 15mm through axles | |

Specifications

RIMS

• Material: 100% carbon fiber with UDÂ² external layer

• Material: 100% carbon fiber

-Height: 45 mm Disc brake specific profile

• Tire : UST Tubeless and tubetype

- Internal width : 19 mm

• ETRTO size : 622x19TC Fore Carbon tapeless tubeless technology

UST tubeless technology

SPOKES

-Material : steel • Shape : straight pull, elliptical aero, double butted

(patented) • Nipples : Fore integrated aluminum

• Count: 24 front and rear

• Lacing : front and rear crossed 2, contactless

WHEEL HUB

Infinity hubs • Front and rear bodies : aluminum - Axle material : aluminum Instant Drive 360 freewheel technology QRM Auto bearing preload technology • Front : Quick release and 12x100 through axle compatible • Rear: Quick Release, 12x142 and 12x135 compatible

Hub available for Center Lock brake rotors only VERSIONS

- Disc standard : Center Lock® only • Freewheel : Shimano/Sram

WHEEL WEIGHTS

785