


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  $\,$ 

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't

exceed 120kg, bike included Recommended tire sizes: 25 to 32 mm

 $\mbox{\it Max}.$  Pressure: see indication on wheel and tire. If they differ, use the lowest of the 2

#### **REFERENCES WHEELS**

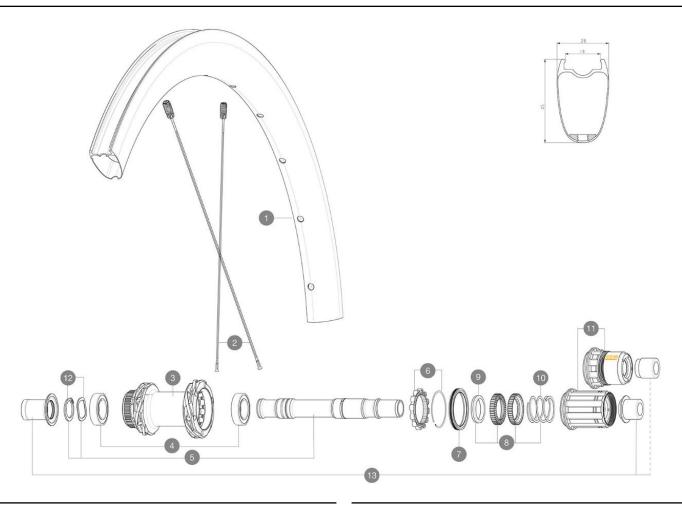

## **RIMS**



:

1 V00062831 Kit Front/Rear rim Cosmic SLR45 Ltd

## **SPOKES**

2 V4163701 Kit 12 Front/Rear Cosmic SLR 45 Disc aero stainless spoke 27

#### **HUB SHELLS**

3	N/A	HUB BODY
3	N/A	HUB BODY
4	M40076	HUB BEARINGS 17x30x7 6903 x 2
5	V00046431	KIT AXE ID360 142LIGHT CL+CIR
6	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
7	V00063631	Kit ID360 seal version 2 (larger)
8	V2251701	KIT ID360 2 RATCHETS + SPRING + GREASE
9	V2500501	KIT ID360 3 PADS NOISE REDUCING
10	V2251801	KIT 3 ID360 ROAD SPRINGS
11	V3430101	HG11 Freewheel Body ID360
11	V2580101	FREEHUB BODY XD Road ID360
12	V2373001	KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing

### **OPTIONS**

V2373401 KIT ID360 135/142 DCL L1 AXLE WITH CLIP

## **ADAPTERS**

13	V3811001	KIT ROAD ID360 RR CL ENDCAP (12MM)
	V2510801	ID360 V2 RrAxleAdapt9x135
	V2510901	ID360 EVO BrAxleAdot12x135/150

# MAVIC COSMIC SLR 45 LTD

2023 REAR

#### **DELIVERED WITH**

UST valve and accessories (129 838 01)	
User guide	

## **COMPATIBILITY**

Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement	
Front axle: 12x100 thru axle, easily convertible to quick release with optional adapters. Not compatible with 15mm through axles	

## **Specifications**

#### **RIMS**

 $\blacksquare$  Material : 100% carbon fiber with UD² external

- Material: 100% carbon fiber

■ Height: 45 mm Disc brake specific profile • Tire: UST Tubeless and tubetype • Internal width: 19 mm **ETRTO size**: 622x19TC

Fore Carbon tapeless tubeless technology

UST tubeless technology

#### **SPOKES**

■ Material : steel

- Shape: straight pull, elliptical aero, double butted

(patented)

• Nipples : Fore integrated aluminum ■ Count: 24 front and rear

• Lacing: front and rear crossed 2, contactless

#### WHEEL HUB

Infinity hubs

• Front and rear bodies : aluminum - Axle material : aluminum Instant Drive 360 freewheel technology

QRM Auto bearing preload technology

• Front : Quick release and 12x100 through axle

compatible

• Rear: Quick Release, 12x142 and 12x135 compatible

Hub available for Center Lock brake rotors only VERSIONS

- Disc standard : Center Lock® only • Freewheel: Shimano/Sram

#### WHEEL WEIGHTS

785