


ASTM CATEGORY 1 : road only

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

Recommended tire sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tire. If they differ, use the lowest of the 2

## REFERENCES WHEELS

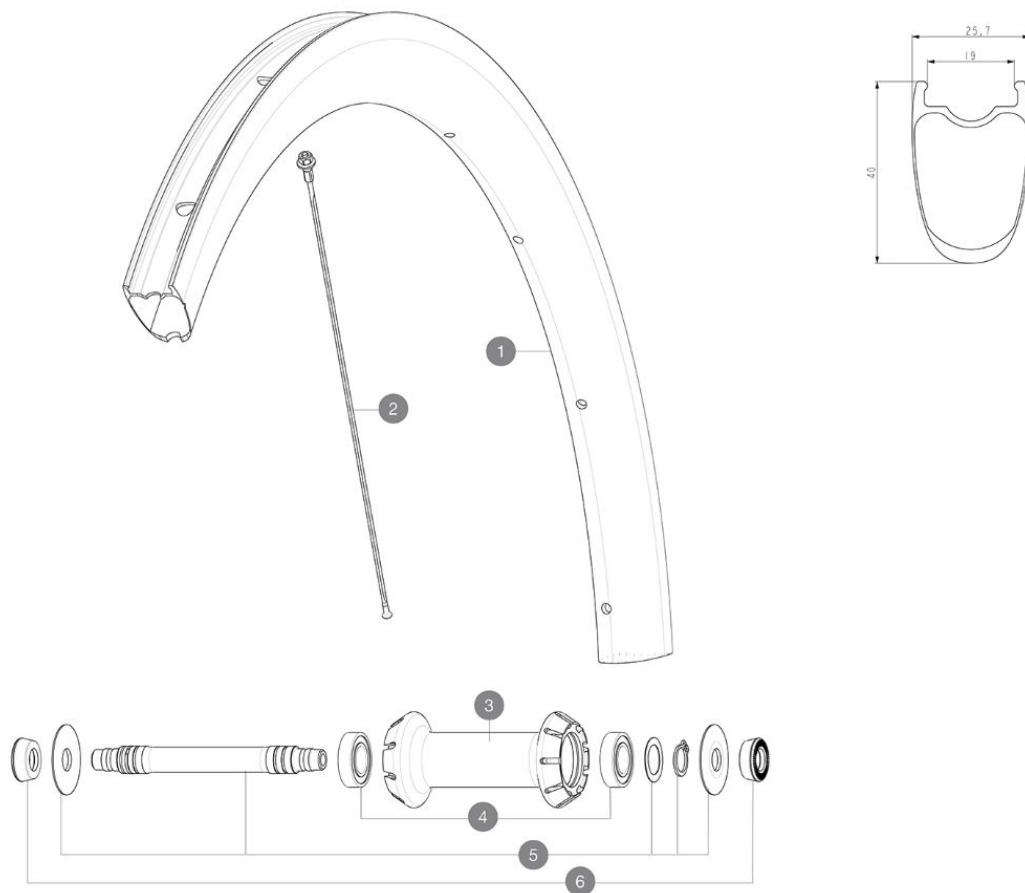

## RIMS



&NBSP;:

|   |           |                                        |
|---|-----------|----------------------------------------|
| 1 | V00063201 | Kit Front rim Cosmic SL40 Ltd          |
|   | V3720101  | 25mm UST Tape for 19 to 22mm Road Rims |

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V4163001 | Kit 9 front Cosmic SL 40 RB butted stainless spoke 271mm + s |
|---|----------|--------------------------------------------------------------|

## HUB SHELLS

|   |          |                                                             |
|---|----------|-------------------------------------------------------------|
| 3 | N/A      | HUB BODY                                                    |
| 4 | M40078   | FRONT HUB BEARINGS 6901 x 2                                 |
| 5 | V2375801 | Kit front axle RB for QRM auto hub + hoobster + wave washer |

## ADAPTERS

|   |          |                                                         |
|---|----------|---------------------------------------------------------|
| 6 | 35117301 | FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T |
|---|----------|---------------------------------------------------------|



# COSMIC SL 40 LTD

### DELIVERED WITH

|                                                                       |  |
|-----------------------------------------------------------------------|--|
| BR301 quick releases<br>(V24 501 01 frt, V24 502 01 rear)             |  |
| Carbon brake pads<br>(V24 603 01 Shimano/Sram, V24 604 01 Campagnolo) |  |
| UST valve and accessories<br>(129 838 01)                             |  |
| Pre-installed tubeless rim tape                                       |  |
| User guide                                                            |  |

### COMPATIBILITY

|                                                                                                   |  |
|---------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies |  |
| Front axle: Quick Release only                                                                    |  |
| Rear axle: Quick Release only                                                                     |  |

### Specifications

#### RIMS

- **Material** : 100% carbon fiber
  - **Height** : 40 mm
  - **Drilling** : traditional
  - **Tire** : UST Tubeless and tubetype
  - **Internal width** : 19 mm
  - **ETRTO size** : 622x19TC
- Use with Mavic Tubeless Tape  
UST tubeless technology  
iTgMAX carbon clincher technology for rim brake

#### SPOKES

- **Material** : steel
  - **Shape** : straight pull, flat, double butted
  - **Nipples** : aluminum, ABS
  - **Count** : front 18, rear 24
  - **Lacing** : front crossed 2, rear Isopulse
- Isopulse lacing design

#### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Instant Drive 360 freewheel technology  
QRM Auto bearing preload technology

#### VERSIONS

- **Freewheel** : Shimano/Sram

#### WHEEL WEIGHTS

705