


ASTM CATEGORY 1 : road only

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

Recommended tire sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tire. If they differ, use the lowest of the 2

## REFERENZEN RÄDER

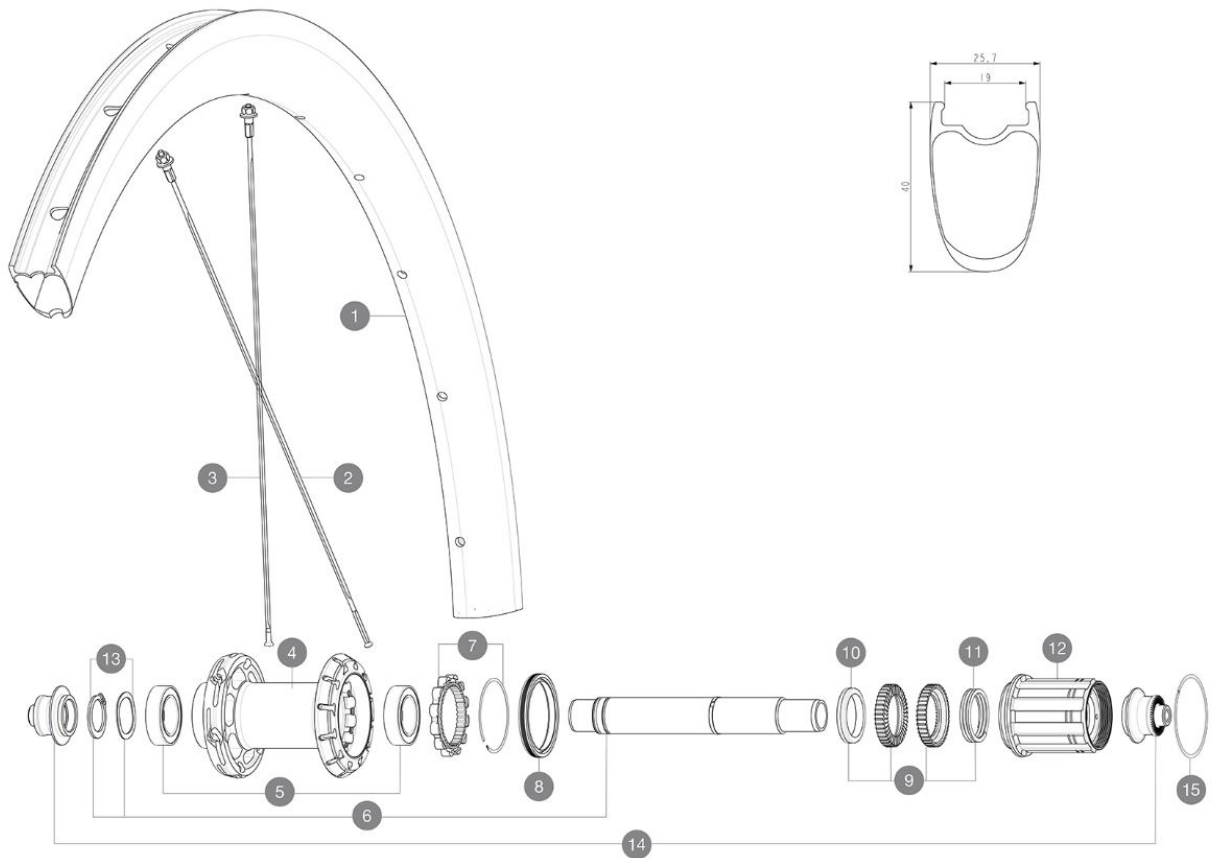

## RIMS



&NBSP;;

|   |           |                                        |
|---|-----------|----------------------------------------|
| 1 | V00063309 | Kit Rear rim Cosmic SL40 Ltd           |
|   | V3720101  | 25mm UST Tape for 19 to 22mm Road Rims |

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V4161601 | Kit 12 rear DS butted stainless spoke 260mm Com Pro Carbon U |
| 3 | V4162801 | Kit 12 rear NDS Cosmic SL 40 RB butted stainless spoke 280mm |

## HUB SHELLS

|    |           |                                                              |
|----|-----------|--------------------------------------------------------------|
| 4  | N/A       | NABENKÖRPER                                                  |
| 5  | V2560401  | KIT ID360 2 BEARINGS 17x28x7 + CIRCLIP + WAVED WASHER (QRM A |
| 6  | V2252801  | KIT ID360 UB REAR WHEEL AXLE WITH CIRCLIP/WAVE WASHER        |
| 7  | V2252701  | KIT ID360 INSERT SHAPED EAR LOBE > 2017                      |
| 8  | V00063631 | Kit ID360 seal version 2 (larger)                            |
| 9  | V2251701  | ID360 2 RATCHETS + SPRING + GREASE                           |
| 10 | V2500501  | Kit 3 ID360 pad for noise reduction                          |
| 11 | V2251801  | KIT 3 ID360 ROAD SPRINGS                                     |
| 12 | V3430101  | HG11 Freewheel Body ID360                                    |
| 13 | V2560501  | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x28x7 bearing        |
| 15 | V2252201  | KIT 2 REAR HUB RETENTION RINGS 48mm                          |

## ADAPTERS

|    |          |                                           |
|----|----------|-------------------------------------------|
| 14 | V2253101 | KIT REAR AXLE ADAPTOR QUICK RELEASE ID360 |
|----|----------|-------------------------------------------|



# COSMIC SL 40 LTD

### GELIEFERT MIT

|                                                                       |  |
|-----------------------------------------------------------------------|--|
| BR301 quick releases<br>(V24 501 01 frt, V24 502 01 rear)             |  |
| Carbon brake pads<br>(V24 603 01 Shimano/Sram, V24 604 01 Campagnolo) |  |
| UST valve and accessories<br>(129 838 01)                             |  |
| Pre-installed tubeless rim tape                                       |  |
| User guide                                                            |  |

### COMPATIBILITY

|                                                                                                   |  |
|---------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies |  |
| Front axle: Quick Release only                                                                    |  |
| Rear axle: Quick Release only                                                                     |  |

### Specifications

#### FELGEN

- **Material** : 100% carbon fiber
  - **Height** : 40 mm
  - **Drilling** : traditional
  - **Tire** : UST Tubeless and tubetype
  - **Internal width** : 19 mm
  - **ETRTO size** : 622x19TC
- Use with Mavic Tubeless Tape  
UST tubeless technology  
iTgMAX carbon clincher technology for rim brake

#### SPEICHEN

- **Material** : steel
  - **Shape** : straight pull, flat, double butted
  - **Nipples** : aluminum, ABS
  - **Count** : front 18, rear 24
  - **Lacing** : front crossed 2, rear Isopulse
- Isopulse lacing design

#### RADNABE

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Instant Drive 360 freewheel technology  
QRM Auto bearing preload technology

#### VERSIONS

- **Freewheel** : Shimano/Sram

#### RADGEWICHTE

895