


## REFERENZEN RÄDER

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included  
Recommended tire sizes: 25 to 32 mm  
Max. Pressure: see indication on wheel and tire. If they differ, use the lowest of the 2



## RIMS

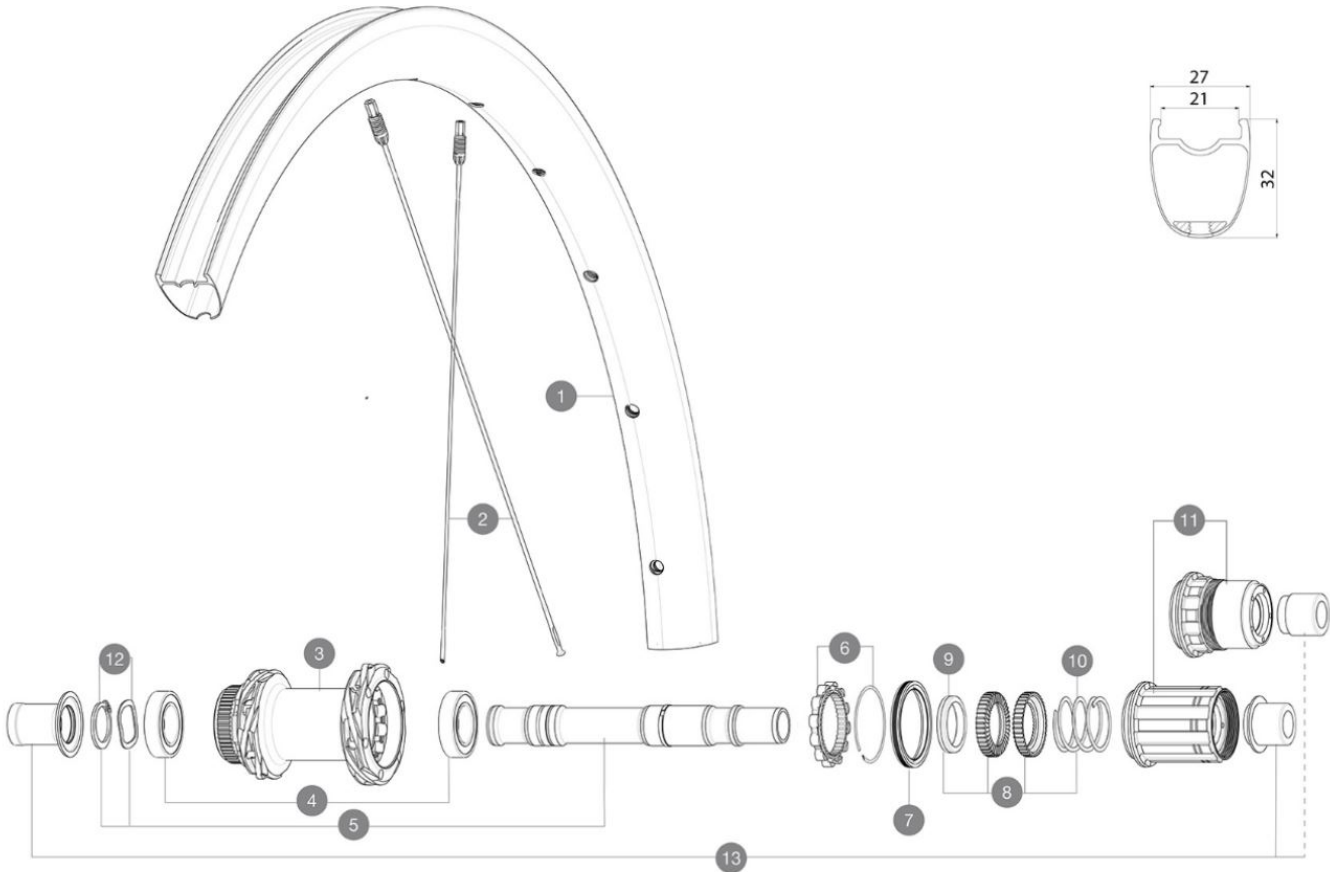

&amp;NBSP;;

|   |           |                                     |
|---|-----------|-------------------------------------|
| 1 | V00063431 | Kit Front/Rear rim Cosmic SLR32 Ltd |
|---|-----------|-------------------------------------|

## SPOKES

|   |          |                                          |
|---|----------|------------------------------------------|
| 2 | V4164801 | Kit 12 CosmicSLR32 Disc aero sspk M6 291 |
|---|----------|------------------------------------------|

## HUB SHELLS

|    |           |                                                       |
|----|-----------|-------------------------------------------------------|
| 3  | N/A       | NABENKÖRPER                                           |
| 3  | N/A       | NABENKÖRPER                                           |
| 4  | M40076    | HUB BEARINGS 17x30x7 6903 x 2                         |
| 5  | V00046431 | KIT AXE ID360 142LIGHT CL+CIR                         |
| 6  | V2252701  | KIT ID360 INSERT SHAPED EAR LOBE > 2017               |
| 7  | V00063631 | Kit ID360 seal version 2 (larger)                     |
| 8  | V2251701  | ID360 2 RATCHETS + SPRING + GREASE                    |
| 9  | V2500501  | Kit 3 ID360 pad for noise reduction                   |
| 10 | V2251801  | KIT 3 ID360 ROAD SPRINGS                              |
| 11 | V3430101  | HG11 Freewheel Body ID360                             |
| 11 | V2580101  | FREEHUB BODY XD Road ID360                            |
| 12 | V2373001  | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing |

## OPTIONS

|          |                                         |
|----------|-----------------------------------------|
| V2373401 | KIT ID360 135/142 DCL L1 AXLE WITH CLIP |
|----------|-----------------------------------------|

## ADAPTERS

|    |          |                                                 |
|----|----------|-------------------------------------------------|
| 13 | V3811001 | KIT ROAD ID360 RR CL ENDCAP (12MM)              |
|    | V2510901 | ID360 EVO REAR AXLE ADAPTERS 12x135mm DCL & D6T |
|    | V2510801 | ID360 EVO REAR AXLE ADAPTERS 9x135mm DCL & D6T  |



# COSMIC SLR 32 LTD

### GELIEFERT MIT

|                                           |  |
|-------------------------------------------|--|
| UST valve and accessories<br>(129 838 01) |  |
| User guide                                |  |

### COMPATIBILITY

|                                                                                                                                  |  |
|----------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies                                |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement                              |  |
| Front axle: 12x100 thru axle, easily convertible to quick release with optional adapters. Not compatible with 15mm through axles |  |

### Specifications

#### FELGEN

- **Material** : 100% carbon fiber with UDÂ² external layer
- **Material** : 100% carbon fiber
- **Height** : 32mm

Disc brake specific profile

- **Tire** : UST Tubeless and tubetype
- **Internal width** : 21 mm
- **ETRTO size** : 622x21TC

Fore Carbon tapeless tubeless technology  
UST tubeless technology

#### SPEICHEN

- **Material** : steel
- **Shape** : straight pull, elliptical aero, double butted (patented)
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2, contactless

#### RADNABE

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
  - **Front** : Quick release and 12x100 through axle compatible
  - **Rear** : Quick Release, 12x142 and 12x135 compatible
- Infinity hubs  
Nabe nur fÄ¼r Center-LockÂ®-Bremsscheiben erhÄ¼ltlich  
Instant Drive 360 freewheel technology  
QRM Auto bearing preload technology

#### VERSIONS

- **Disc standard** : Center LockÂ® only
- **Freewheel** : Shimano/Sram

#### RADGEWICHTE

760