



## ASTM CATEGORY 3 : CROSS COUNTRY

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Minimum tyre size: width 52mm - pressure max. 2.35Bar/34PSI

Maximum tyre size: width 125mm - pressure max. 1.25Bar/18PSI

## REFERENCES WHEELS

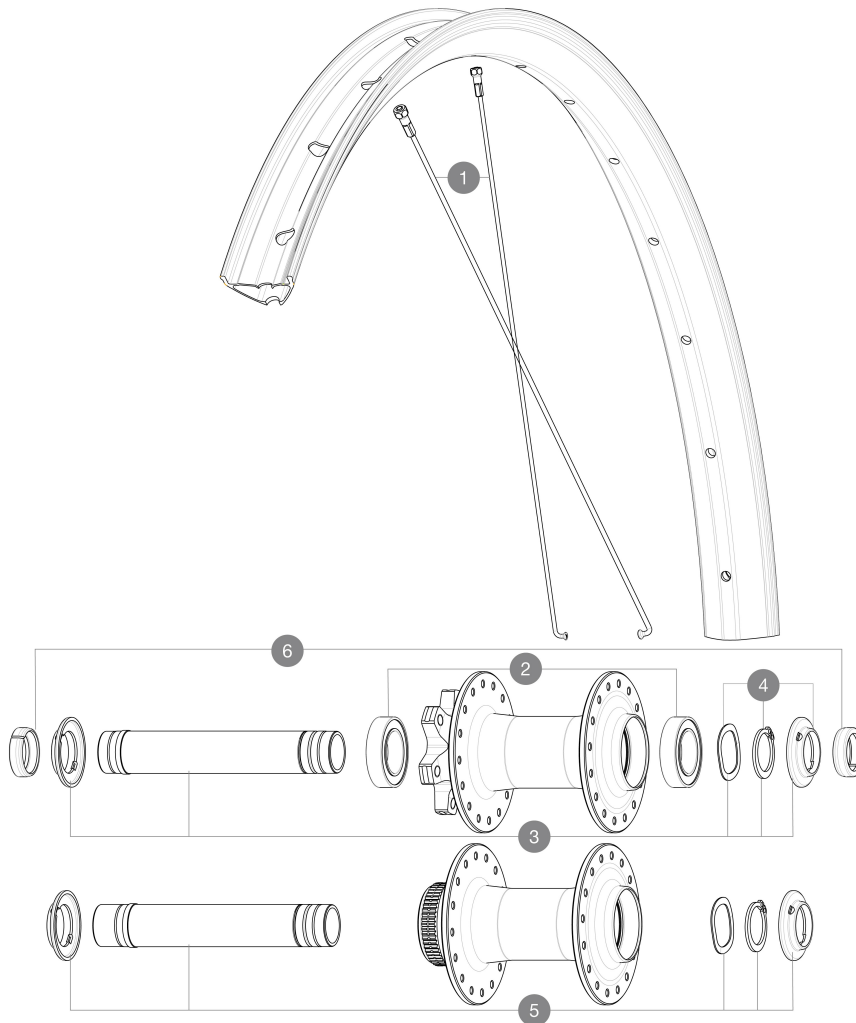

| Specifications  | Maxi target   |
|-----------------|---------------|
| Frontal run out | 0,5mm         |
| Lateral run out | 0,5mm         |
| Centrerig       | 1,0mm (2x0,5) |
| Tension daN     | 64 > 113      |
| Disc side       |               |

## SPOKES

1 V00062531 Kit 16ft/rr Jbent bk rd spk275 27,5"+np

## HUB SHELLS

2 V2500901 KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP  
3 V2372401 KIT 110mm AXLE QRM AUTO MTB > 2019  
4 V2373001 KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing  
5 V2375601 Kit 110mm axle QRM auto MTB from 2019 DCL

## OPTIONS

V2374401 TORQUE CAPS 15\*31 Adapter MTB QRM Auto > 2019 Frt HUB

## ADAPTERS

6 V2372501 15mm MTB Axle Cap QRM Auto From 2019  
99694101 ADAPTER Ft 15 to 9mm QR



# E-CROSSRIDE 1 27.5

2023  
FRONT

DELIVERED WITH

|                                 |  |
|---------------------------------|--|
| Pre-installed tubeless rim tape |  |
| User guide                      |  |

COMPATIBILITY

|                                                                                                        |  |
|--------------------------------------------------------------------------------------------------------|--|
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)                        |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel) |  |

Specifications

RIMS

- **Material** : S6000 Aluminum
  - **Height** : 21 mm
  - **Joint** : sleeved
  - **Internal width** : 30 mm
  - **Drilling** : traditional (front/rear 32 holes)
- Disc brake specific profile  
E-Bike specific rim profile  
Black Shield treatment (protects your rim against impacts and scratches)
- **Tire** : clincher

SPOKES

- **Material** : steel
- **Count** : 20 front and rear

WHEEL HUB

- **Body** : aluminum
- **Body design** : CLASSIC
- **Disc standard** : 6 Bolts or Center Lock®
- **Axle material** : aluminum
- **Rear body** : aluminum
- **Axles** : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- **Front** : Quick release and 12x100 through axle compatible
- **Freewheel** : FTS-L steel

WHEEL WEIGHTS