


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
Maximum tyre pressure: 4.4bar/64PSI with a 28mm tyre - 2.6bar/38PSI with a 64mm tyre  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included  
Maximum tyre size: width 62mm - pressure max. 3.8Bar/55PSI

## REFERENCES WHEELS



## RIMS

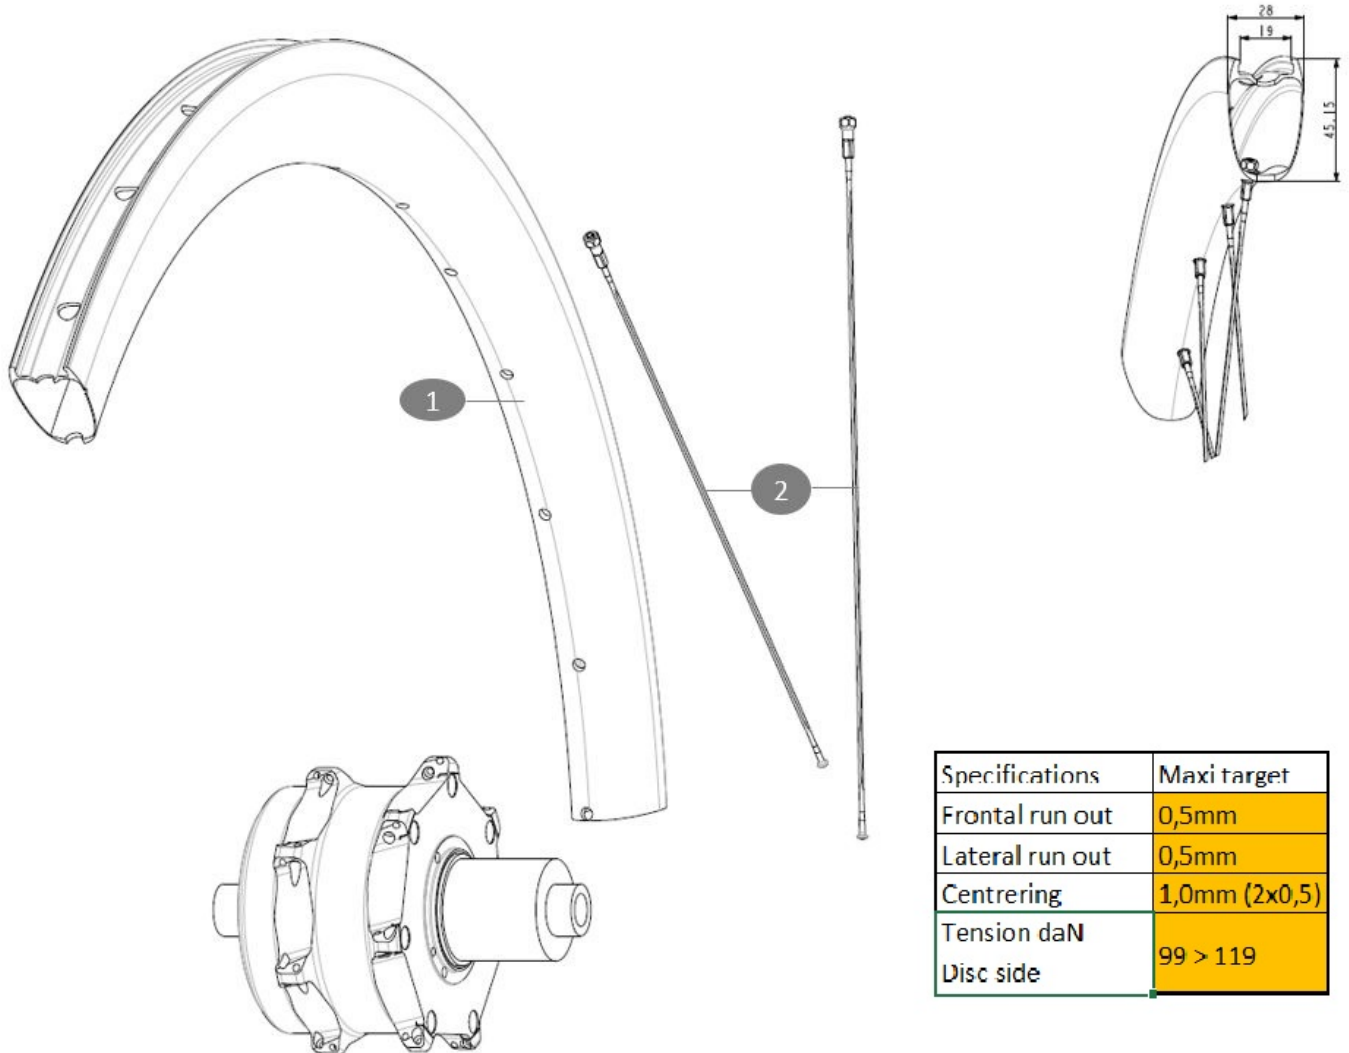

&NBSP;:

|   |           |                                        |
|---|-----------|----------------------------------------|
| 1 | V00055109 | Kit Rear rim Cosmic SL45 EBM X20       |
|   | V3720101  | 25mm UST Tape for 19 to 22mm Road Rims |

## SPOKES

|   |           |                                          |
|---|-----------|------------------------------------------|
| 2 | V00054731 | Kit 14CosmicSL45 spk263 EBMX20+blk npl+w |
|---|-----------|------------------------------------------|



# COSMIC SL 45 DISC MAHLEX20

2023  
REAR

DELIVERED WITH

|                                                 |  |
|-------------------------------------------------|--|
| Mavic tyre sealant (rear wheel)<br>(355 466 01) |  |
| UST valve and accessories<br>(129 838 01)       |  |
| Pre-installed tubeless rim tape                 |  |
| User guide                                      |  |

COMPATIBILITY

|                                                                                                                                                                                                                                                       |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Instant Drive 360 freewheel technology<br>The new Instant Drive 360 freewheel system is super light and fast to engage with only 9Å°. A large contactless rubber seal provides low friction, while a wide array of end caps makes it super versatile. |  |
| FTS-L Shimano / Sram freewheel body<br>([30871101] - Delivered on the wheel)                                                                                                                                                                          |  |

Specifications

RIMS

- **Material** : 100% carbon fiber
  - **Height** : 45 mm
  - **Drilling** : traditional (front/rear 28 holes)
- Disc brake specific profile
- **ETRTO size** : 622x19TC
  - **Tire** : clincher

SPOKES

- **Lacing** : front radial, rear crossed 2

WHEEL HUB

- **Body** : aluminum
- **Body design** : INFINITY
- **Disc standard** : 6 Bolts only

WHEEL WEIGHTS