


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
Maximum tyre pressure: 4.4bar/64PSI with a 28mm tyre - 2.6bar/38PSI with a 64mm tyre  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included  
Maximum tyre size: width 62mm - pressure max. 3.8Bar/55PSI

## REFERENCES WHEELS



## RIMS

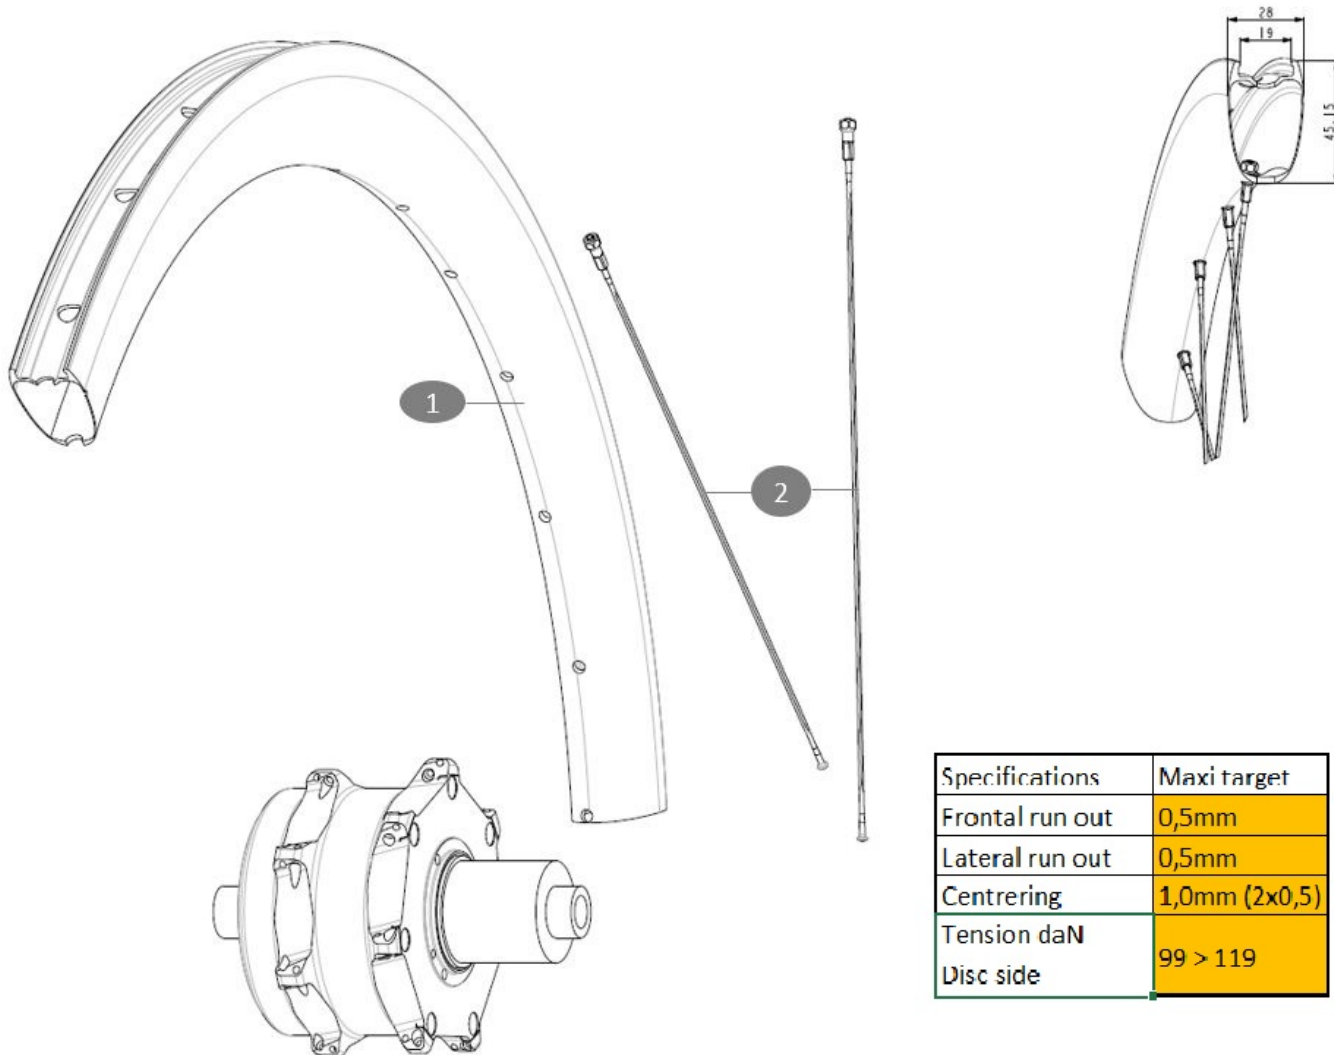

&NBSP;:

- |   |           |  |
|---|-----------|--|
| 1 | V00055109 | Kit Rear rim Cosmic SL45 EBM X20       |
|   | V3720101  | 25mm UST Tape for 19 to 22mm Road Rims |

## SPOKES

- |   |           |  |
|---|-----------|--|
| 2 | V00054731 | Kit 14CosmicSL45 spk263 EBMX20+blk npl+w |
|---|-----------|--|



# COSMIC SL 45 DISC MAHLEX20

### DELIVERED WITH

Mavic tyre sealant (rear wheel) (355 466 01)	
UST valve and accessories (129 838 01)	
Pre-installed tubeless rim tape	
User guide	

### COMPATIBILITY

Instant Drive 360 freewheel technology The new Instant Drive 360 freewheel system is super light and fast to engage with only 9Â°. A large contactless rubber seal provides low friction, while a wide array of end caps makes it super versatile.	
FTS-L Shimano / Sram freewheel body ([30871101] - Delivered on the wheel)	

### Specifications

#### RIMS

- **Material** : 100% carbon fiber
  - **Height** : 45 mm
  - **Drilling** : traditional (front/rear 28 holes)
- Disc brake specific profile
- **ETRTO size** : 622x19TC
  - **Tire** : clincher

#### SPOKES

- **Lacing** : front radial, rear crossed 2

#### WHEEL HUB

- **Body** : aluminum
- **Body design** : INFINITY
- **Disc standard** : 6 Bolts only

#### WHEEL WEIGHTS