
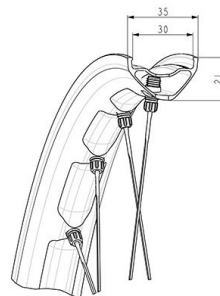


参照ホイール

ASTM E1000 5 :
 5mm-
 2.95Bar/43PSI
 12mm
 [V2510801] -

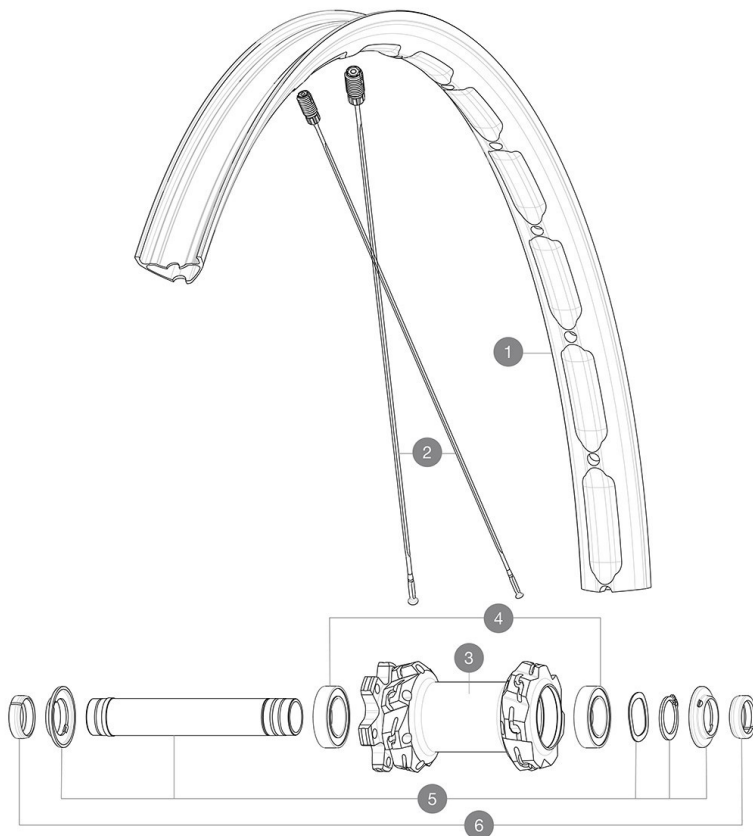

Specifications	Maxi target
Frontal run out	0,5mm
Lateral run out	0,5mm
Centring	1,0mm (2x0,5)
Tension daN	81 > 107
Disc side	

RIMS



&NBSP;:

- 1 V00094631 Kit Front/Rear rim Deemax Enduro SL 29"

SPOKES

- 2 V00095231 Kit 14 steel spokes 305mm Deemax Enduro SL 29"

HUB SHELLS

- 3 N/A HUB BODY
- 4 V2500901 KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
- 5 V2372401 KIT 110mm AXLE QRM AUTO MTB > 2019

OPTIONS

- 99694101 2 REDUCERS 15/9mm

ADAPTERS

- 6 V2372501 15mm MTB Axle Cap QRM Auto From 2019

付属品

Table with 2 columns and 8 rows listing accessories like UST, tires, and valves.

COMPATIBILITY

Table with 2 columns and 8 rows listing compatible components like tires, tubes, and valves.

Specifications

リム

Technical specifications for the rim, including dimensions and material details.

スポーク

Technical specifications for the spokes, including count and material.

ホイールハブ

Technical specifications for the wheel hub, including dimensions and compatibility.

ホイールの重み

905