


### **REFERENCES WHEELS**

ASTM CATEGORY 5: GRAVITY RIDING FOCUSED ON THE DESCENT Minimum tyre size: width 52mm - pressure max. 2.95Bar/43PSI

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included



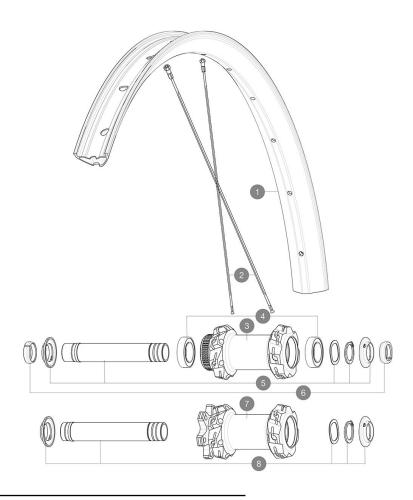

Specifications	Maxi target	
Frontal run out	0,5mm	
Lateral run out	0,5mm	
Centrering	1,0mm (2x0,5)	
Tension daN	00 - 406	
Disc side	83 > 126	

### **RIMS**



## :

1	V00096331	Kit Front/Rear rim eDeemax 24 29"
	V3750101	35mm UST Green Tape for 30mm wide rims

### **SPOKES**

2	V00096831	Kit 14 steel spokes 302mm eDeemax 24 29"
---	-----------	--

## **HUB SHELLS**

3	N/A	HUB BODY
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL
7	N/A	HUB BODY
8	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019

### **ADAPTERS**

6	V2372501	15mm MTB Axle Cap QRM Auto From 2019

# MAVIC E-DEEMAX 29

### **DELIVERED WITH**

UST valve and accessories (129 838 01)	
Pre-installed tubeless rim tape	
User guide	
2 replacement spokes with each wheel	

### **COMPATIBILITY**

OUMI ATIDILITI	
Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately)	
Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)	
Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separetly)	
Instant Drive 360 freewheel technology The new Instant Drive 360 freewheel system is super light and fast to engage with only 9°. A large contactless rubber seal provides low friction, while a wide array of end caps makes it super versatile.	
Front axle: for fixing nuts only (included), M9x1 thread	

## **Specifications**

### RIMS

Material : MaxtalHeight : 22 mm

Joint: SUP welding technology
 Internal width: 30 mm

• Drilling: traditional (front/rear 28 holes)
Disc brake specific profile

Asymmetrical rim design
• ETRTO size 29": 622x30TC

• Tire : clincher SPOKES • Material : steel

 ${\color{red}\textbf{-}} \textbf{Lacing}: \ \text{front and rear crossed 2, contactless}$ 

### WHEEL HUB

Body: aluminumBody design: INFINITY

• Disc standard : 6 Bolts or Center Lock®

-Axle material : aluminum - Rear body : aluminum

-Axles: Front 15X110 (Boost) or 15x100; Rear

12X148 (Boost) or 12x142

• Rear: Quick Release, 12x142 and 12x135

compatible

• Freewheel: FTS-L steel
WHEEL WEIGHTS

1066