
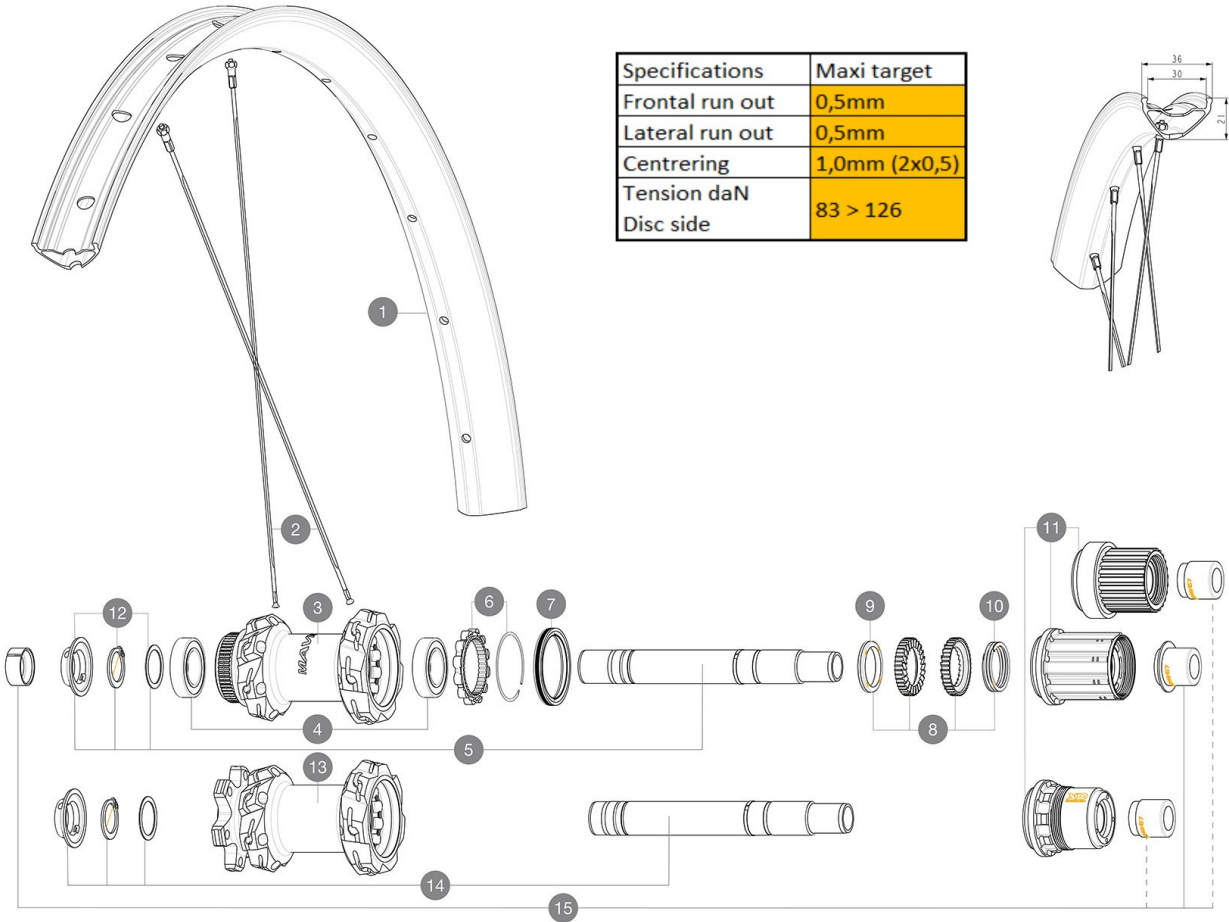


ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT  
Minimum tyre size: width 52mm - pressure max. 2.95Bar/43PSI  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

REFERENCES WHEELS

| Specifications           | Maxi target   |
|--------------------------|---------------|
| Frontal run out          | 0,5mm         |
| Lateral run out          | 0,5mm         |
| Centring                 | 1,0mm (2x0,5) |
| Tension daN<br>Disc side | 83 > 126      |



RIMS



&NBSP;:

ADAPTERS

15 V2510701 ID360V2RrAxleAdapt12x142/148

- 1 V00096331 Kit Front/Rear rim eDeemax 24 29"
- V3750101 35mm UST Green Tape for 30mm wide rims

SPOKES

- 2 V00096831 Kit 14 steel spokes 302mm eDeemax 24 29"

HUB SHELLS

|    |          |                                                            |
|----|----------|------------------------------------------------------------|
| 3  | N/A      | HUB BODY                                                   |
| 4  | M40076   | HUB BEARINGS 17x30x7 6903 x 2                              |
| 5  | V2375701 | Kit ID360 148 DCL axle with circlip                        |
| 6  | V2252701 | KIT ID360 INSERT SHAPED EAR LOBE > 2017                    |
| 7  | V2251601 | KIT ID360 SEAL + GREASE                                    |
| 8  | V2375201 | KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific) |
| 9  | V2375401 | KIT ID360 MTB 24T 3 NOISE REDUCING PADS                    |
| 10 | V2372901 | KIT 3 ID360 MTB SPRINGS                                    |
| 11 | V3740101 | XD MTB Freewheel Body ID360                                |
| 11 | V3990101 | MicroSpline MTB Freewheel Body ID360                       |
| 11 | V3780101 | HG9 Alloy MTB Freewheel Body ID360                         |
| 12 | V2373001 | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing      |
| 13 | N/A      | HUB BODY                                                   |
| 14 | V2372201 | KIT ID360 148 D6T AXLE WITH CLIP                           |



# E-DEEMAX 29

### DELIVERED WITH

|                                           |  |
|-------------------------------------------|--|
| UST valve and accessories<br>(129 838 01) |  |
| Pre-installed tubeless rim tape           |  |
| User guide                                |  |
| 2 replacement spokes with each wheel      |  |

### COMPATIBILITY

|                                                                                                                                                                                                                                                      |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately)                                                                                                                                                                  |  |
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)                                                                                                                                                                      |  |
| Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)                                                                                                                                                                       |  |
| Instant Drive 360 freewheel technology<br>The new Instant Drive 360 freewheel system is super light and fast to engage with only 9°. A large contactless rubber seal provides low friction, while a wide array of end caps makes it super versatile. |  |
| Front axle: for fixing nuts only (included), M9x1 thread                                                                                                                                                                                             |  |

### Specifications

#### RIMS

- **Material** : Mactal
  - **Height** : 22 mm
  - **Joint** : SUP welding technology
  - **Internal width** : 30 mm
  - **Drilling** : traditional (front/rear 28 holes)
- Disc brake specific profile  
Asymmetrical rim design
- **ETRTO size 29"** : 622x30TC
  - **Tire** : clincher

#### SPOKES

- **Material** : steel
- **Lacing** : front and rear crossed 2, contactless

#### WHEEL HUB

- **Body** : aluminum
- **Body design** : INFINITY
- **Disc standard** : 6 Bolts or Center Lock®
- **Axle material** : aluminum
- **Rear body** : aluminum
- **Axles** : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- **Rear** : Quick Release, 12x142 and 12x135 compatible
- **Freewheel** : FTS-L steel

#### WHEEL WEIGHTS

1194