


## REFERENCES WHEELS

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included  
Minimum tyre size: width 52mm - pressure max. 2.95Bar/43PSI

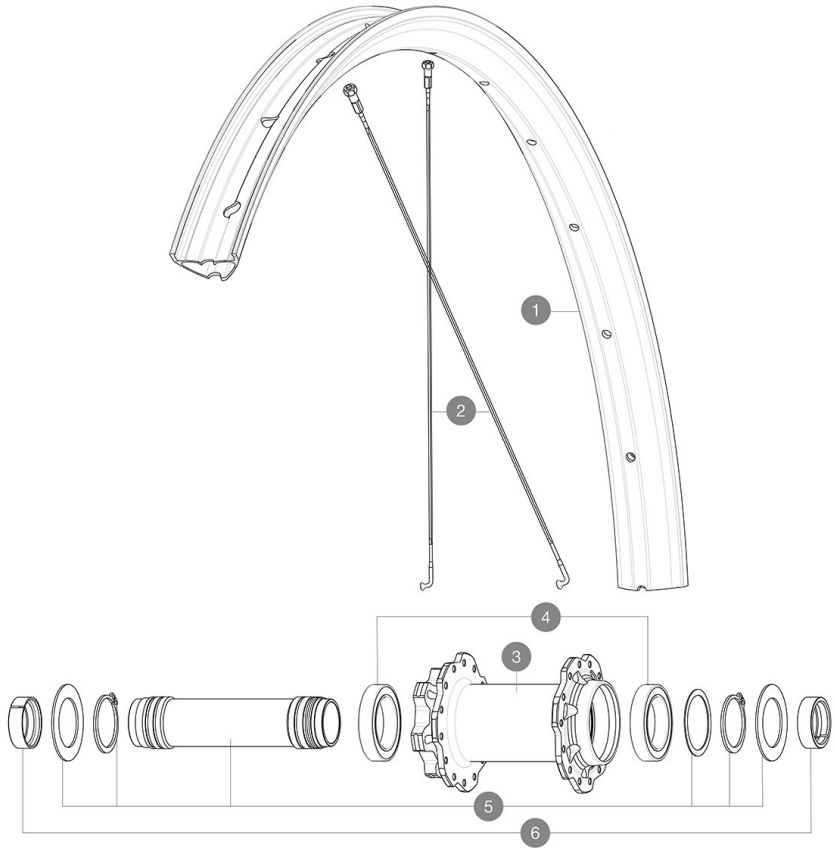

| Specifications           | Maxi target   |
|--------------------------|---------------|
| Frontal run out          | 0,5mm         |
| Lateral run out          | 0,5mm         |
| Centring                 | 1,0mm (2x0,5) |
| Tension daN<br>Disc side | 99 > 119      |

## RIMS



&amp;NBSP;:

|   |           |                                         |
|---|-----------|-----------------------------------------|
| 1 | V00094931 | Kit Front/Rear rim Deemax DH yellow 29" |
|   | V3750101  | 35mm UST Green Tape for 30mm wide rims  |

## SPOKES

|   |          |                                                             |
|---|----------|-------------------------------------------------------------|
| 2 | V2387901 | KIT 14 J BENT STEEL SPOKES 299mm DEEMAX DH 29" + black stee |
|---|----------|-------------------------------------------------------------|

## HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 3 | N/A      | HUB BODY                                    |
| 4 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 5 | V2373701 | KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019 |

## ADAPTERS

|   |          |                                       |
|---|----------|---------------------------------------|
| 6 | V2680401 | 20x110 BOOST Front Adapter MTB wheels |
|---|----------|---------------------------------------|



# DEEMAX DH YLW 29

### DELIVERED WITH

|                                           |  |
|-------------------------------------------|--|
| UST valve and accessories<br>(129 838 01) |  |
| Pre-installed tubeless rim tape           |  |
| User guide                                |  |
| 2 replacement spokes with each wheel      |  |
| Fore adjustment wrench                    |  |

### COMPATIBILITY

|                                                                                                                                                                                                                                                      |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)                                                                                                                                                                                |  |
| Freewheel body: convertible SHIMANO HG MTB aluminium (kit V3780101 sold separately)                                                                                                                                                                  |  |
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)                                                                                                                                                                      |  |
| Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)                                                                                                                                                                       |  |
| Instant Drive 360 freewheel technology<br>The new Instant Drive 360 freewheel system is super light and fast to engage with only 9°. A large contactless rubber seal provides low friction, while a wide array of end caps makes it super versatile. |  |
| ID360 Shimano / Sram freewheel body ([V3430101] - Delivered on the wheel)                                                                                                                                                                            |  |

### Specifications

#### RIMS

- **Material** : Mactal
  - **Height** : 22 mm
  - **Joint** : SUP welding technology
  - **Internal width** : 30 mm
  - **Drilling** : traditional (front/rear 28 holes)
- Disc brake specific profile
- Asymmetrical rim design
- **ETRTO size 29"** : 622x30TC
  - **Tire** : clincher

#### SPOKES

- **Material** : steel
- **Count** : 32 front and rear

#### WHEEL HUB

- **Body** : aluminum
  - **Disc standard** : 6 Bolts only
  - **Axle material** : aluminum
- Infinity hubs
- **Axles** : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
  - **Front** : Quick release, 12x100 and 15x100 through axle compatible
  - **Freewheel** : FTS-L steel

#### WHEEL WEIGHTS

990