




参照ホイール

ASTM A521-10 52mm-
 2.95Bar/43PSI
 180mm-
 180mm

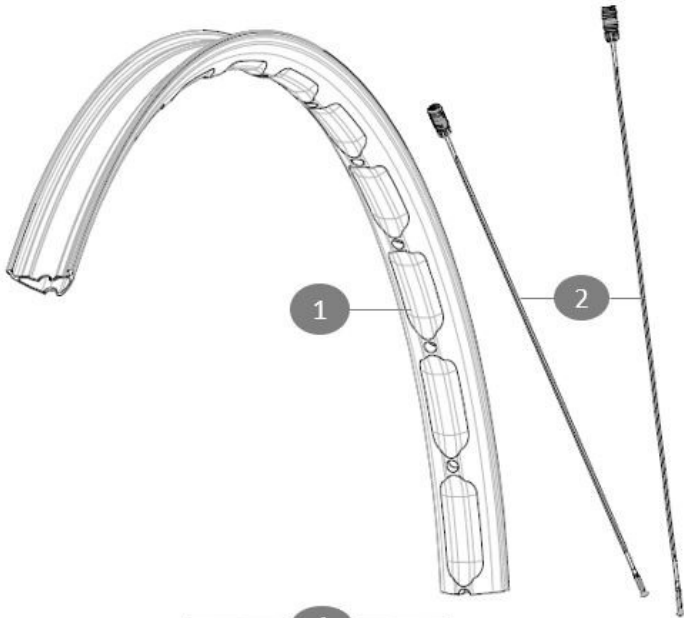

Jante avant e-Deemax S WB

Specifications	Maxi target
Frontal run out	0,5mm
Lateral run out	0,5mm
Centrerig	1,0mm (2x0,5)
Tension daN	81 > 107
Disc side	

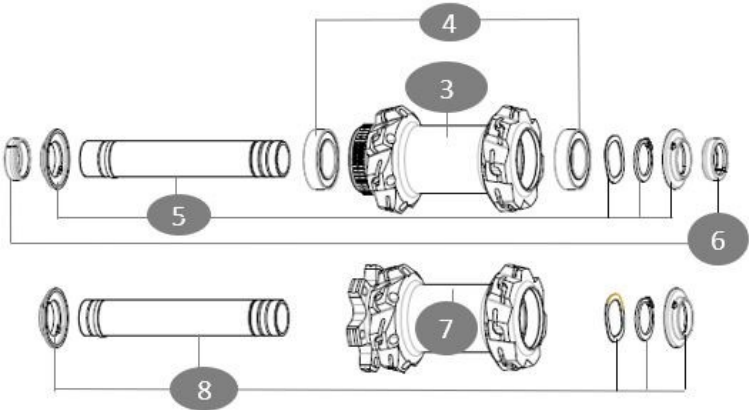

RIMS



&NBSP;:

- 1 V00100431 Kit Front/Rear rim eDeemax S30 24 29"

SPOKES

- 2 V00100831 Kit 14 steel spokes 305mm eDeemax S30 24 29"

HUB SHELLS

- 3 N/A HUB BODY
- 4 V2500901 KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
- 5 V2375601 Kit 110mm axle QRM auto MTB from 2019 DCL
- 7 N/A HUB BODY
- 8 V2372401 KIT 110mm AXLE QRM AUTO MTB > 2019

ADAPTERS

- 6 V2372501 15mm MTB Axle Cap QRM Auto From 2019



COMPATIBILITY

ā□□ā□°ā□□%ā□□ā□□ā□□«æ□ à½□ī¼□ā□-ā□□ā□□HG MTBā□çā□ «ā□□è£¼ā□°ā□°ā□□ā□°ā□□ā□□ ā□«ī¼□ā□- ā□□ā□□V3780101ā□¥ā£²¼□	
ā□□ā□°ā□□%ā□□ā□□ā□°ā□«æ□ à½□ī¼□ā□°ā□°ā□□ā□°ā□□ā□□ā □«ā□-ā□□ā□□HG MTBā□°ā□□ā□ %ā□«ī¼□ā□- ā□□ā□□V3790101ā□¥ā£²¼□	
ā□°ā□çā□çā□-ā□'ā□«ā□çā□□ā□ □ā□¿ā□¼ī¼□ 12x148ā□□9x141ā□« à□□æ□□ī¼□ā□- ā□□ā□□V2510801ā□-ā□¥ā£²¼□	
ā□□ā□ā□°ā□□ā□çā□-ā□'ā□«ī¼□ ā□çā□□ā□□ā□¿ā□¼ā□§15mmā□' ā□«ā□¼ā□çā□-ā□'ā□«ā□□ā□□ā □ā□°ā□□ā□-ā□°ā□°ā□¼ā□'ā□,ā □@çµ□ā□¿æ□¿ā□□ā□□ā□-è□½	
ā□□ā□ā□°ā□□ ā□çā□-ā□'ā□«ī¼ □ā□°ā□@ç□-'ā□□ā□□ā□□ā□@ā□ ¿ī¼□ā□«ā□□ī¼□ā□□M9x1ā□'ā□ ā□□ā□□	

リム

スポーク

ç' æ□□i%□ā□'ā□□ā□%ā□«
 à%çç□□i%□ā□'ā□□ā□-ā□%ā□□ā□□ā□
 «ā□□ā□©ā□|ā□³ā□□
 ā□'ā□□ā□%ā□-çu□i%□ā□□ā□-
 ā□³ā□□i%□ā□'ā□çā□' 3ā□-ā□ā□'çu□

ホイールハブ

[illegible]

ホイールの重み

912